

Cuisine Series Heavy Duty Open Burner Top Range

Project _____
Item _____
Quantity _____
CSI Section 11400
Approved _____
Date _____

Models

- C36-6R
- C36-6S
- C36-6C
- C36-6M



Model C36-6R
Range with 6
Open Burners

Standard Features

- 35,000 BTU/h (NG) Garland Starfire open top burners
- One-piece cast iron grates and bowls over each open top burner
- Stainless steel front and sides
- Stainless steel front rail
- Stainless steel burner box
- 1-1/4" NPT front gas manifold
- Can be installed individually or in a battery
- 7" (178mm) high stainless steel stub back
- 6" (152mm) stainless steel adj. legs
- Porcelain oven interior w/removable porcelain oven bottom
- R model - 4 rack positions
C model - 3 rack positions
- R model - 1 chrome plated rack
C model - 3 chrome plated racks
- Fully insulated oven interior
- Safety oven pilot
- Oven thermostat control: 150°-500°F (66°- 60°C) (R/C)
- Range base convection oven (C) c/w NEMA 5-15P cord & plug, 1/3 Hp motor, 120V 60Hz, 0.6A
- Modular unit (M) can be mounted on Polar Cuisine refrigerated base

Options & Accessories

- Stainless steel oven interior in lieu of porcelain oven interior - NC
- Single or double deck high shelf or back riser
- Full height stand for modular base with legs or casters
- Stainless steel intermediate shelf for cabinet base
- Stainless steel door(s) for cabinet base units
- Stainless steel back
- Continuous plate rail, 48-72" for battery installations
- Gas shut-off valves: 3/4" (M/S models only), 1", 1 1/4" NPT (Specify)
- Gas regulator: 3/4" (M/S models only), 1", 1 1/4" NPT (Specify)
- Gas flex hose w/ quick disconnect: 3/4" (M/S models only), 1", 1 1/4" NPT (Specify)
- Rear Gas Connection: 3/4" (M/S models only), 1", 1 1/4" NPT (Specify)
- Set of (4) flanged feet (for fastening unit to the floor)
- Set of (4) 5" polyurethane non-marking swivel casters w/front brakes
- Extra oven rack
- Extension for 1/9 pans

Specifications

Garland Cuisine 36" (914mm) wide Heavy Duty Range Series. Model _____ with total BTU/h rating of _____ when used with natural/propane gas. Stainless steel front and sides. 6" (152mm) legs with adjustable feet.

Ovens - One piece oven door. Porcelain oven interior with a heavy-duty, "keep-cool" door handle. Standard oven comes with a thermostat with a temperature range from 150° (low) to 500°F (66°- 260°C).


Open Burners - 35,000 BTU/h per burner and a one piece, cast iron top grate and bowl over each burner. Note: Range-based convection oven models can be located in the middle of a battery, banked back-to-back with other equipment, and can be positioned against a wall.

NOTE: Ranges supplied with casters must be installed with an approved restraining device.



Cuisine Series Heavy Duty Open Burner Top Range

Cuisine Series Heavy Duty Open Burner Top Range

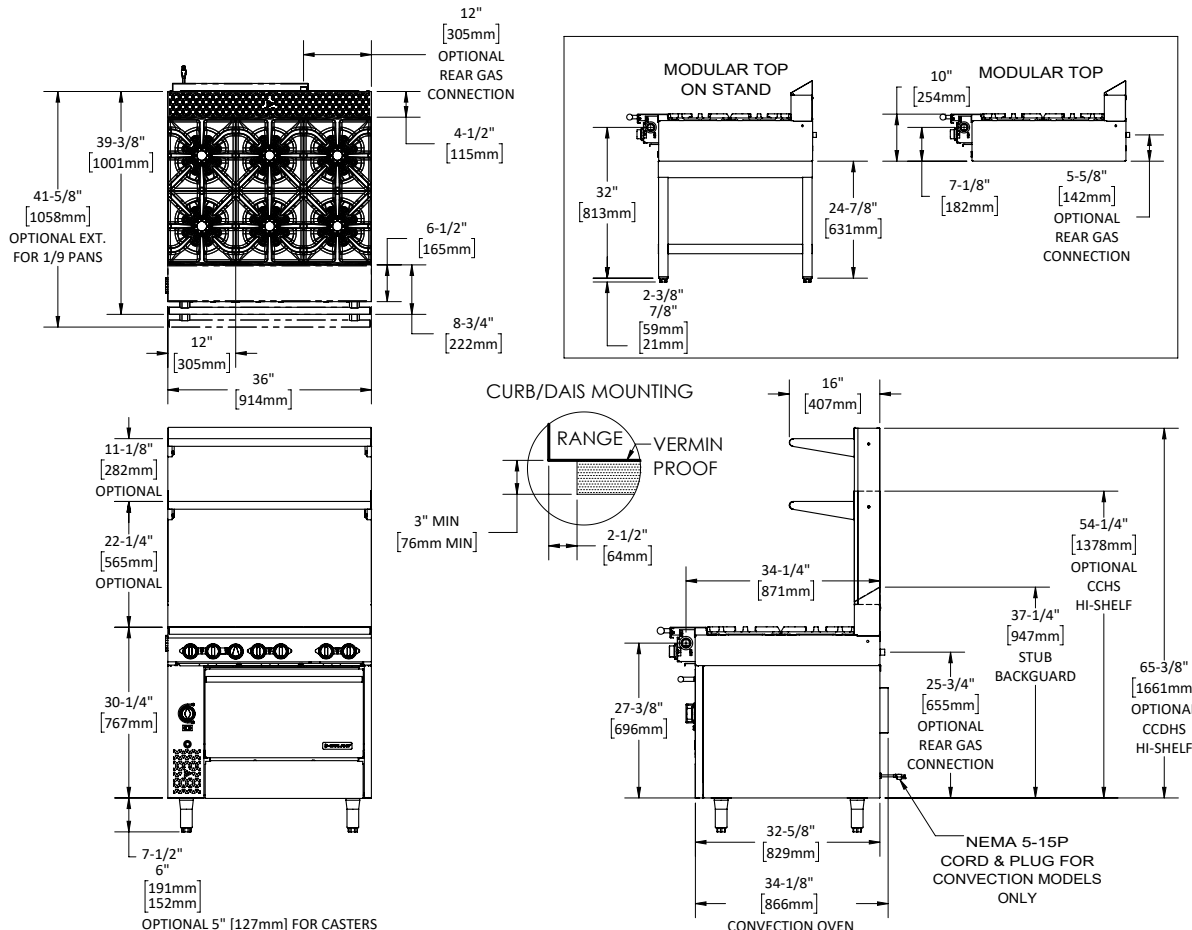

Dimensions:

- Top: 39-3/8" [1001mm]
- Height (Optional Ext. for 1/9 Pans): 41-5/8" [1058mm]
- Front Panel: 12" [305mm]
- Back Panel: 12" [305mm]
- Optional Rear Gas Connection: 4-1/2" [115mm]
- Front Panel to Burner: 6-1/2" [165mm]
- Front Panel to Oven: 8-3/4" [222mm]
- Front Panel to Casters: 7-1/2" [191mm]
- Front Panel to Casters (Optional 5"): 6" [152mm]
- Front Panel to Casters (Optional 5"): 30-1/4" [767mm]
- Front Panel to Casters (Optional): 22-1/4" [565mm]
- Front Panel to Casters (Optional): 11-1/8" [282mm]
- Front Panel to Casters (Optional): 36" [914mm]
- Front Panel to Casters (Optional): 32" [813mm]
- Front Panel to Casters (Optional): 24-7/8" [631mm]
- Front Panel to Casters (Optional): 7-1/8" [182mm]
- Front Panel to Casters (Optional): 5-5/8" [142mm]
- Front Panel to Casters (Optional): 2-3/8" [59mm]
- Front Panel to Casters (Optional): 7/8" [21mm]
- Front Panel to Casters (Optional): 16" [407mm]
- Front Panel to Casters (Optional): 34-1/4" [871mm]
- Front Panel to Casters (Optional): 37-1/4" [947mm]
- Front Panel to Casters (Optional): 25-3/4" [655mm]
- Front Panel to Casters (Optional): 32-5/8" [829mm]
- Front Panel to Casters (Optional): 34-1/8" [866mm]
- Front Panel to Casters (Optional): 54-1/4" [1378mm]
- Front Panel to Casters (Optional): 65-3/8" [1661mm]

Labels: MODULAR TOP ON STAND, MODULAR TOP, CURB/DAIS MOUNTING, VERMIN PROOF, RANGE, 3" MIN [76mm MIN], 2-1/2" [64mm], NEMA 5-15P CORD & PLUG FOR CONVECTION MODELS ONLY, CONVECTION OVEN, OPTIONAL REAR GAS CONNECTION, OPTIONAL CCHS HI-SHELF, STUB BACKGUARD, OPTIONAL CCHS HI-SHELF, OPTIONAL REAR GAS CONNECTION, OPTIONAL CCHS HI-SHELF.

Model #	Description	Total BTU/h NAT. Gas	Total BTU/h Propane	Shipping	
				Cu Ft	Lbs/Kg
C36-6R	6-Open Burners / Standard Oven	250,000	233,000	50	562/255
C36-6C*	6-Open Burners / Convection Oven	245,000	233,000	50	562/255
C36-6S	6-Open Burners / Storage Base	210,000	198,000	50	361/164
C36-6M	6-Open Burners / Modular Top	210,000	198,000	20	320/145

*120V 60Hz 0.6 A c/w NEMA 5-15P cord & plug

Combustible Wall Clearance	
Sides	Back
10" (254mm)	6" (152mm)

Burner	Individual Burner Ratings (BTU/h)				
	NAT.		PRO.		
	Open Top	Std. Oven	Open Top	Conv. Oven	
	35,000	40,000	33,000	37,000	35,000

Interior Dimensions: In (mm)			
Product	Height	Width	Depth
Standard Oven	13-1/2(323)	26-1/4 (667)	29 (737)
Convection Oven	13-1/2(323)	26-1/4 (667)	25 (635)
Cabinet Base	20-1/2 (521)	32-1/4 (819)	31 (787)

Gas Pressure	NAT.	PRO.
Minimum Supply	7" WC	11" WC
Manifold Operating Pressure	6" WC	10" WC
Gas Manifold 1-1/4" NP		

Welbilt reserves the right to make changes to the design or specifications without prior notice.