

# Fusion

## Product Specifications

ITEM NO: \_\_\_\_\_  
PROJECT: \_\_\_\_\_  
DATE: \_\_\_\_\_

### Refrigerated Service Single Deck Case



MODEL SHOWN: GLDSV4R

- ☐ GLDSV3R
- ☐ GLDSV4R
- ☐ GLDSV6R

Lengths include 1-1/8" end panels  
39"L x 47-7/8"D x 51-5/8"H  
51"L x 47-7/8"D x 51-5/8"H  
75-3/8"L x 47-7/8"D x 51-5/8"H

#### STANDARD FEATURES

- Breeze™ w/EnergyWise s/c refrigeration
- Compressor air intake from rear and out front panel at toe kick. Front panel cannot be blocked.
- Corrosion resistant stainless steel tub & fan shroud
- Integrated average product temperature of 40°F or less
- LED 4000K top light(s)
- One year parts & labor; 5 year compressor warranty
- Vertical, UV bonded lift-up front glass w/o lock

| Features                | Standard                                                                         | Options                                                                                                                                                                                                                                                         |
|-------------------------|----------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EXTERIOR COLOR          | <input type="checkbox"/> Laminated (non-premium) Confirm pattern/grain direction | <input type="checkbox"/> Laminated (premium) Confirm pattern/grain direction<br><input type="checkbox"/> Painted (stock colors, specify RAL#)<br><input type="checkbox"/> Stainless steel                                                                       |
| INTERIOR COLOR          | <input type="checkbox"/> Black                                                   | <input type="checkbox"/> Stainless steel                                                                                                                                                                                                                        |
| LOWER FRONT PANEL COLOR | <input type="checkbox"/> Painted - Black                                         | <input type="checkbox"/> Stainless steel                                                                                                                                                                                                                        |
| REAR EXTERIOR COLOR     | <input type="checkbox"/> Stainless steel rear exterior                           | <input type="checkbox"/> Painted - Black<br><input type="checkbox"/> Painted - White                                                                                                                                                                            |
| TRIM COLOR              | <input type="checkbox"/> Black                                                   | <input type="checkbox"/> Silver                                                                                                                                                                                                                                 |
| BASE                    | <input type="checkbox"/> Casters w/ levelers (n/a w/ remote ref.)                | <input type="checkbox"/> 6"H legs (n/a w/ remote ref.)<br><input type="checkbox"/> Rail system for shims (n/a w/ s/c ref.)                                                                                                                                      |
| END PANEL LEFT          | <input type="checkbox"/> Full end panel w/mirror interior                        | <input type="checkbox"/> Cutaway w/ glass<br><input type="checkbox"/> No end panel w/ synchronized defrost                                                                                                                                                      |
| END PANEL RIGHT         | <input type="checkbox"/> Full end panel w/mirror interior                        | <input type="checkbox"/> Cutaway w/ glass<br><input type="checkbox"/> No end panel w/ synchronized defrost                                                                                                                                                      |
| REAR WORK LEDGE         | <input type="checkbox"/> Black Sanalite®                                         | <input type="checkbox"/> Solid surface (specify color)<br><input type="checkbox"/> Stainless steel<br><input type="checkbox"/> White Sanalite®                                                                                                                  |
| UPPER REAR              | <input type="checkbox"/> Acrylic rear sliding doors w/o lock                     | <input type="checkbox"/> Open                                                                                                                                                                                                                                   |
| ELECTRICAL CONNECT      | <input type="checkbox"/> 6' straight blade power cord (self-cont.)               | <input type="checkbox"/> 6' locking power cord (self-cont.)<br><input type="checkbox"/> Electrical leads (remote)                                                                                                                                               |
| REFRIGERATION           | <input type="checkbox"/> Breeze™ w/EnergyWise s/c refrigeration                  | <input type="checkbox"/> NOTE: Remote only available w/rail base w/shims. N/A w/ levelers, casters or legs.<br><input type="checkbox"/> Note: Remote doesn't incl Conds unit. Floor drain reqd.<br><input type="checkbox"/> Remote w/thermostat, solenoid & TXV |
| MISCELLANEOUS           |                                                                                  | <input type="checkbox"/> Front glass lock<br><input type="checkbox"/> Rear door lock<br><input type="checkbox"/> Scale stand w/receptacle (requires separate circuit)<br><input type="checkbox"/> Second year parts & labor warranty (excludes compressor)      |
| ACCESSORIES             |                                                                                  | <input type="checkbox"/> 2"H Full depth display riser(s)<br><input type="checkbox"/> Clean Sweep® coil cleaner (n/a w/remote)<br><input type="checkbox"/> Stainless steel condiment rail system                                                                 |


# Fusion

## Product Specifications


**Intended Environment:** Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.

| Zone | Intended Product To Be Displayed | Warmest Avg Prod Temp ° F |
|------|----------------------------------|---------------------------|
| 1    | Unpackaged refrigerated products | 38-40                     |

**PLAN VIEW**

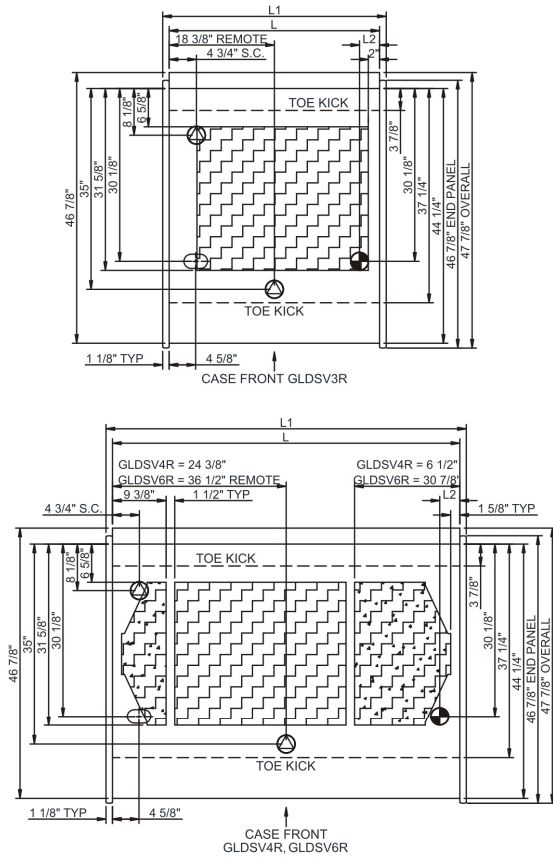

**SIDE VIEW**

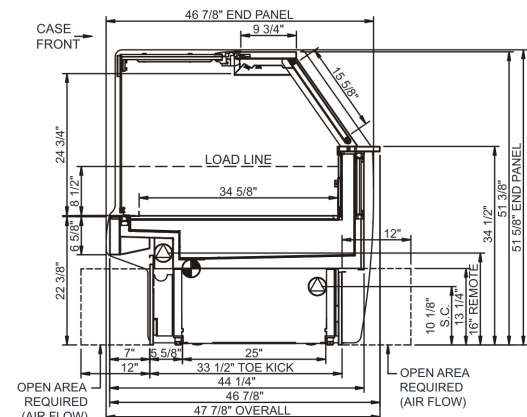

**NOTE: ALL DIMENSIONS APPROXIMATE**

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6" LEADS OR POWER CORD).
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4" OR 1 1/2" PVC TUBE).
- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- REFRIGERATION LINE CONNECTION.
- DRY CASE SERVICE ACCESS AREA.

**Model Technical Specifications**

| Model   | L"    | L1"   | L2"  | System Circuit Volts |            |         | Phs | Freq | Amps<br>*** | Watts | Wires | NEMA Plug       | SST   | Conv.<br>Rack<br>BTUH | Para.<br>Rack<br>BTUH | Est<br>Wt |
|---------|-------|-------|------|----------------------|------------|---------|-----|------|-------------|-------|-------|-----------------|-------|-----------------------|-----------------------|-----------|
| GLDSV3R | 36.75 | 39.00 | 3.50 | Remote(Type I)       | Circuit #1 | 110-120 | 1   | 60   | 1.70        | 22    | 2+G   | Leads Multiple  | 20.00 | 929                   | 860                   | 950       |
|         |       |       |      | Self-Contained       | Circuit #1 | 110-120 | 1   | 60   | 6.20        | 562   | 2+G   | 5-15P or L5-15P | N/A   | N/A                   | N/A                   |           |
| GLDSV4R | 48.75 | 51.00 | 3.50 | Remote(Type I)       | Circuit #1 | 110-120 | 1   | 60   | 1.53        | 106   | 2+G   | Leads Multiple  | 20.00 | 1179                  | 1092                  | 1,050     |
|         |       |       |      | Self-Contained       | Circuit #1 | 110-120 | 1   | 60   | 10.06       | 758   | 2+G   | 5-20P or L5-20P | N/A   | N/A                   | N/A                   |           |
| GLDSV6R | 73.13 | 75.38 | 3.50 | Remote(Type I)       | Circuit #1 | 110-120 | 1   | 60   | 2.29        | 82    | 2+G   | Leads Multiple  | 20.00 | 1771                  | 1640                  | 1,250     |
|         |       |       |      | Self-Contained       | Circuit #1 | 110-120 | 1   | 60   | 14.91       | 1,045 | 2+G   | 5-20P or L5-20P | N/A   | N/A                   | N/A                   |           |

\*\*\* Does not include electric defrost on freezer models.

### Regulatory Approvals:

All Models  
 Accordance with AHRI Std 1200  
 ETL Listed to UL 471  
 ETL Listed to CAN/CSA 22.2 No. 120  
 ETL Sanitation to NSF 7



In Accordance with  
**AHRI Std 1200**

**DOE 2017**  
Energy Efficiency  
Compliant

### Important Notes:

- ELECTRICAL NOTE:** If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle.
  - Units are supplied with levelers. They must be adjusted during installation to ensure the unit is level and plumb. Dimensions reflect levelers extended 1 1/4"
- ⚠ WARNING:** This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).