

# UNDERCOUNTER REFRIGERATOR

## Model: UC24SN

Natural Refrigerant R-290 Model

### 24" Undercounter Front Breathing Refrigerator with Solid Door -Shallow Depth



ENERGY STAR® Qualified Commercial Refrigerator

Stainless steel front, top, back, and end panels, aluminum interior.



## Options and Accessories

(upcharge and lead times may apply)

Stainless steel interior

Additional epoxy coated steel shelves

Consult factory for other model configurations, options and accessories.

**Continental**  
Refrigerator



Project Name:

Model Specified:

Location:

Item No:

Quantity:

AIA #:

SIS #:

## Standard Model Features

### REFRIGERATION SYSTEM

Performance-rated front breathing refrigeration system

Natural, environmentally safe, high efficiency R-290 refrigerant<sup>1</sup>

Automatic, hot gas condensate evaporator

Non-corrosive, plasticized fin evaporator coil

Easily serviceable slide out condensing unit

### CABINET ARCHITECTURE

2" non-CFC polyurethane foam insulation

Smooth, polished chrome door handle

Spring loaded, self closing door with cylinder lock

Magnetic snap in Santoprene™ door gasket

Heavy duty, epoxy coated steel shelves

1 3/8" diameter plate casters (factory installed)

### MODEL FEATURES

Field rehingeable door

Easily accessible and serviceable condensing unit

Electronic control, off-cycle defrost

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

## Model Specifications

### DIMENSIONAL DATA

|                                                              |                  |
|--------------------------------------------------------------|------------------|
| Net Capacity (cubic feet)                                    | 4.3 (122 cu l)   |
| Width, Overall (inches)                                      | 24 (610 mm)      |
| Depth, Overall (inches)<br>(including handle & bumpers)      | 27 5/8 (702 mm)  |
| Height, Overall (inches)<br>(including 1 3/8" plate casters) | 31 7/8 (810 mm)  |
| Shelf area (square feet)                                     | 2.2 (.21 sq m)   |
| No. of Shelves                                               | 2                |
| No. of Doors                                                 | 1                |
| Interior Depth (inches)                                      | 18 3/4 (477 mm)  |
| Interior Height (inches)                                     | 18 (458 mm)      |
| Interior Width (inches)                                      | 19 7/16 (494 mm) |

### REFRIGERANT DATA

|                             |      |
|-----------------------------|------|
| Condensing Unit Size (H.P.) | 1/5  |
| Capacity (BTU per hour)*    | 1800 |

### ELECTRICAL DATA

|                             |          |
|-----------------------------|----------|
| Voltage                     | 115/60/1 |
| Total Amps                  | 2.2      |
| 10 ft. Cord/Plug [attached] | Yes      |

### SHIPPING DATA

|                          |                  |
|--------------------------|------------------|
| Weight (pounds)          | 165 (75 kg)      |
| Height - Crated (inches) | 43 1/4 (1099 mm) |
| Width - Crated (inches)  | 35 1/2 (902 mm)  |
| Depth - Crated (inches)  | 37 1/4 (946 mm)  |

\* Rating @ +25°F evaporator, 90°F ambient  
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug  
(varies by country)

**Continental**  
Refrigerator

Toll-Free: 800-523-7138  
Phone: 215-244-1400  
Fax: 215-244-9579

539 Dunksferry Road  
Bensalem, PA 19020  
[www.continentalrefrigerator.com](http://www.continentalrefrigerator.com)

Due to our continued efforts in developing innovative products, specifications subject to change without notice.




PROUDLY  
DESIGNED & ASSEMBLED  
IN THE U.S.A.


Intertek

© Copyright 2023. Continental Refrigerator.  
A Division of National Refrigeration & Air Conditioning Products, Inc.

## Model Plan Views

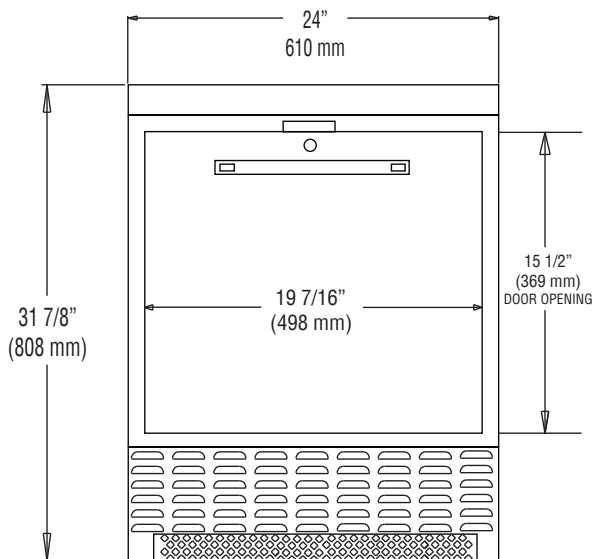

FRONT VIEW

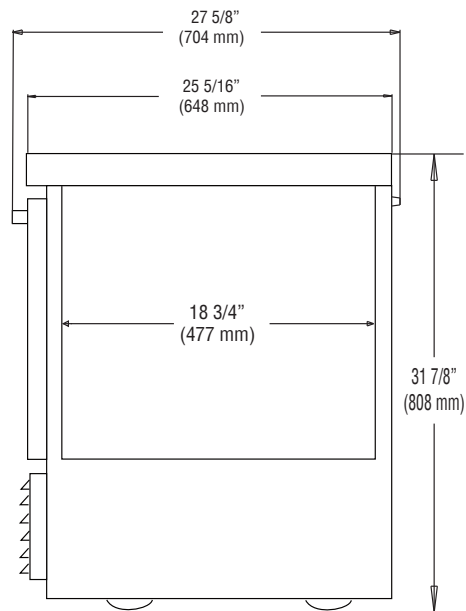

SIDE VIEW

**NOTE:** For proper operation, the area under and in front of the cabinet **must** not be obstructed in any way.