

STANDARD FEATURES

Double panel side glasses
LED lighting on each shelf
Dixell digital control
Self contained
Remote (model A90X only)
Stainless steel foam in place bottom and top
Adjustable feet
Cases ship standard unfinished

OPTIONS

Model A90X - self contained
Stainless steel side panels in lieu of glass
Roll down locking shutter
Epoxy RAL color interior
Remote air cooled or water cooled
RAL color/laminate front and side panels
Condensate pan
Casters



CORA GRAB AND GO					
TECHNICAL FEATURES		MODELS			
		CORA GNG 1000	CORA GNG 1300	CORA GNG 1500	CORA GNG 1700
External Dimensions (L-D-H)	Inches	39 3/8" - 45 1/8" - 52 3/4"	51 3/16" - 45 1/8" - 52 3/4"	59 1/16" - 45 1/8" - 52 3/4"	66 15/16" - 45 1/8" - 52 3/4"
	MM	1000 - 1146 - 1339	1300 - 1146 - 1339	1500 - 1146 - 1339	1700 - 1146 - 1339
Crated Dimensions (L-D-H)	Inches	46" - 53 1/8" - 63"	57" - 53 1/8" - 63"	66" - 53 1/8" - 63"	73" - 53 1/8" - 63"
	MM	1168 - 1350 - 1600	1447 - 1350 - 1600	1676 - 1350 - 1600	1854 - 1350 - 1600
BTU's @ +14°F Evap Temperature	BTU'S	4200 BTU'S	6222 BTU'S	6720 BTU'S	7225 BTU'S
Power Supply	(V/Ph/Hz)	220/1/60	220/1/60	220/1/60	220/1/60
Amperage	(A)	8A	9A	12A	15A
Operating Temperature	°F	+15°F	+15°F	+15°F	+15°F
Net Weights	Kg/Lb	130Kgs / 286Lbs	200Kgs / 440Lbs	240Kgs / 528Lbs	279Kgs / 616Lbs
Crated Weights	Kg/Lb	145Kgs / 319Lbs	220Kgs / 484Lbs	255Kgs / 561Lbs	289Kgs / 638Lbs

* DIMENSIONS ARE WITHOUT SIDE PANELS * REMOTE APPLICATION - CONDENSING UNIT SOLD SEPERATELY * FLOOR SINK RECOMMENDED ON THESE MODELS

CORA GRAB AND GO					
TECHNICAL FEATURES		MODELS			
		CORA GNG 2000	CORA GNG A30	CORA GNG A90	CORA GNG A90X
External Dimensions (L-D-H)	Inches	78 3/4" - 45 1/8" - 52 3/4"	64 11/16" - 45 1/8" - 52 3/4"	65" - 45 1/8" - 52 3/4"	70 13/16" - 45 1/8" - 34 5/8"
	MM	2000 - 1146 - 1339	1643 - 1146 - 1339	1650 - 1146 - 1339	1798 - 1146 - 879
Crated Dimensions (L-D-H)	Inches	84" - 53 1/8" - 63"	70" - 53 1/8" - 63"	70" - 53 1/8" - 63"	77" - 53 1/8" - 41"
	MM	2133 - 1350 - 1600	1778 - 1350 - 1600	1778 - 1350 - 1600	1955 - 1350 - 1041
BTU's @ +14°F Evap Temperature	BTU'S	8820 BTU'S	6720 BTU'S	8950 BTU'S	12,600 BTU'S
Power Supply	(V/Ph/Hz)	220/1/60	220/1/60	220/1/60	220/1/60
Amperage	(A)	16A	15A	17A	2A
Operating Temperature	°F	+15°F	+15°F	+15°F	+15°F
Net Weights	Kg/Lb	300Kgs / 660Lbs	240Kgs / 528Lbs	300Kgs / 660Lbs	344Kgs / 760Lbs
Crated Weights	Kg/Lb	330Kgs / 726Lbs	255Kgs / 561Lbs	330Kgs / 726Lbs	374Kgs / 826Lbs

* DIMENSIONS ARE WITHOUT SIDE PANELS * REMOTE APPLICATION - CONDENSING UNIT SOLD SEPERATELY * FLOOR SINK RECOMMENDED ON THESE MODELS

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.




361-367 Beach Road, Burlingame, CA 94010
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com




ELECTRICAL LEGEND	
	1/4" DRAIN
	REFRIGERATION LINES: 3/8" LIQUID, 1/2" SUCTION
	POWER


SECTION VIEW

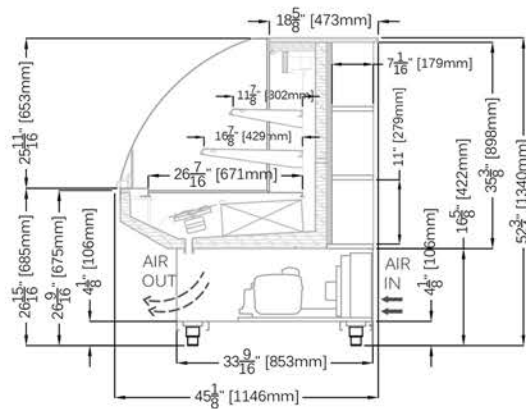


SECTION VIEW GNG A90X

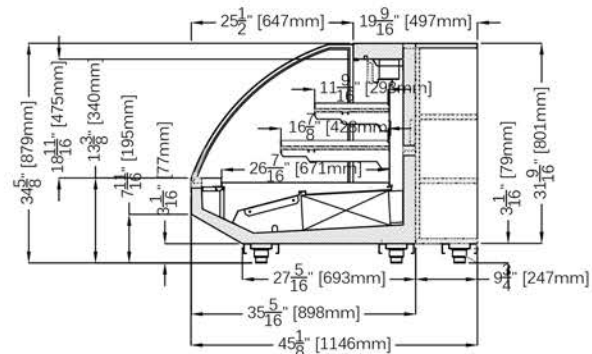


PLAN VIEWS:

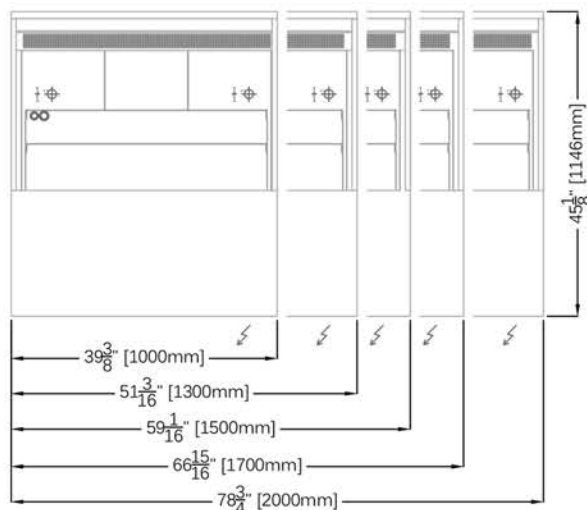


GNG A30

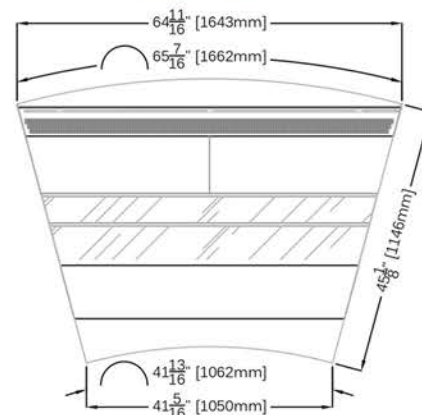

GNG A90

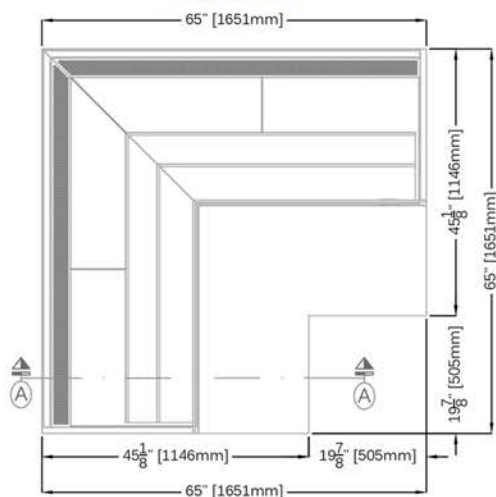


GNG A90X

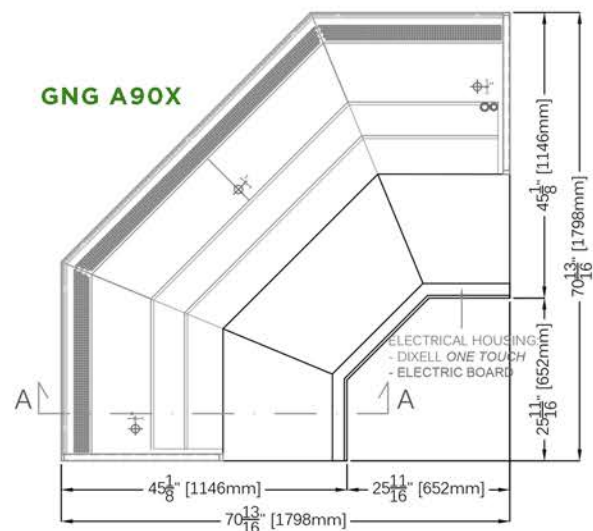


* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.


FRONT ELEVATIONS (CUSTOMER SIDE):

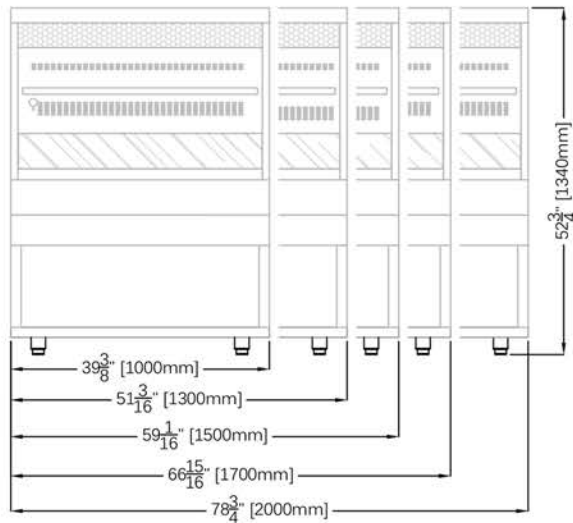


**SECTION A-A
GNG A90**

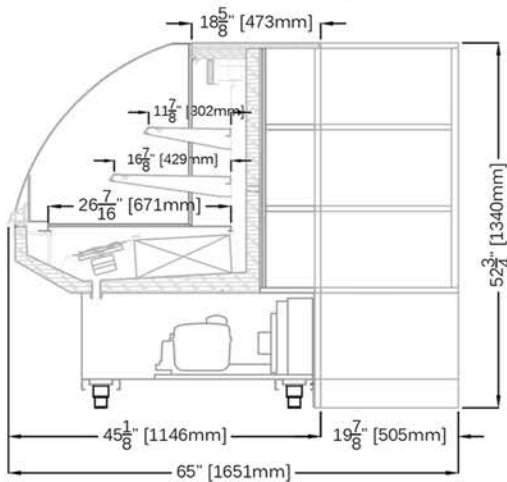


GNG A30

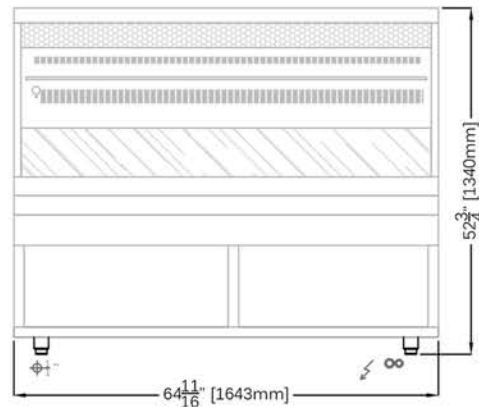

**SECTION A-A
GNG A90X**

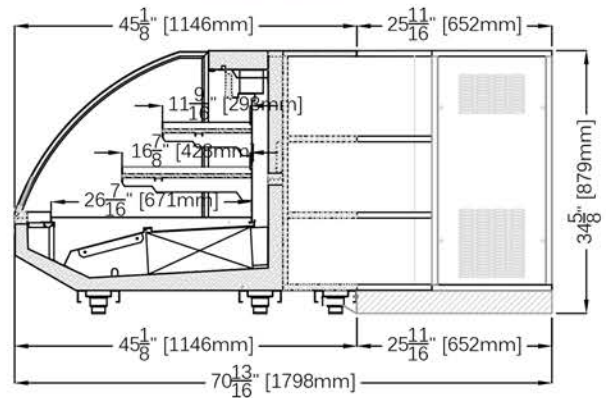

**FRONT ELEVATION (CUSTOMER SIDE)
GNG A90X**

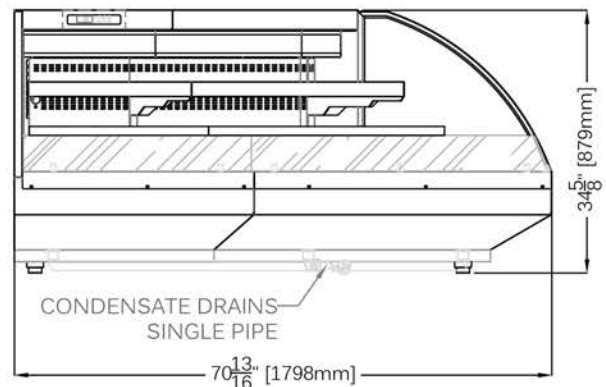

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.