



DXP741



DINEX SUPERIOR FOUNDATION

Featured on our toughest racks: Two 12 gauge aluminized steel reinforcing channels support our .125" thick aluminum bottom panel. The edges are formed and rolled to create a built-in bumper and plate casters make this the strongest foundation in the industry.

Dinex Channel Racks are designed so that you can partially withdraw a tray and not worry about tipping. The choice of front or side loading models lets you choose a style that works for you. In the fast-paced worlds of bakery production and food services, capacity and rigidity are qualities greatly in demand. Dinex Channel Racks deliver these qualities economically and with superior strength.

STANDARD FEATURES

- Strong, Solid-Bottom Foundation
- No-Tip Channel Design
- Rigid, Quality Construction
- Solid Bottom

CHANNELS

- 1.5" standard spacing
- Provides flexibility in pan spacing
- Fully welded

TIE BARS

- 1/2" extruded aluminum tie bar keeps rack square
- Adds rigidity and stability to rack

MODEL NUMBER

- DXP733
- DXP733-S
- DXP741
- DXP741-S

DIMENSIONS

- DXP733 H57-1/4" x W21" x D27-3/8"
- DXP741 H69-1/4" x W21" x D27-3/8"
- DXP733S H57-1/4" x W29-1/8" x D19-1/8"
- DXP741S H69-1/4" x W29-1/4" x D19-1/8"

SOLID BOTTOM

- Rolled edge acts as bumper
- 14 gauge reinforcing caster channel eliminates twisting
- Fully welded corners
- Greatly enhances rack strength
- .125" thick aluminum

SUPERIOR CORNER SUPPORTS

- Extruded 3-sided channel support
- .190" thick gussets provide superior strength

HEAVY-DUTY CASTERS

- Plate casters for added rigidity and stability
- 5" x 1-1/4" sealed wheels
- Delrin bearing, each with 350 lbs. capacity
- Maximum resistance to chemicals, acids, bases, alcohol, water and steam
- Maximum low temperature flexibility for superior performance, even in freezing temperatures
- Optional 5" x 2" size available


WARRANTY

- One year parts and labor. Warranty is detailed on inside front cover of the price list.

We do not accept returns on any Dinex equipment or Dinex custom products. Please contact your local Dinex rep to ensure order accuracy prior to ordering.

Channel Racks

Aluminum

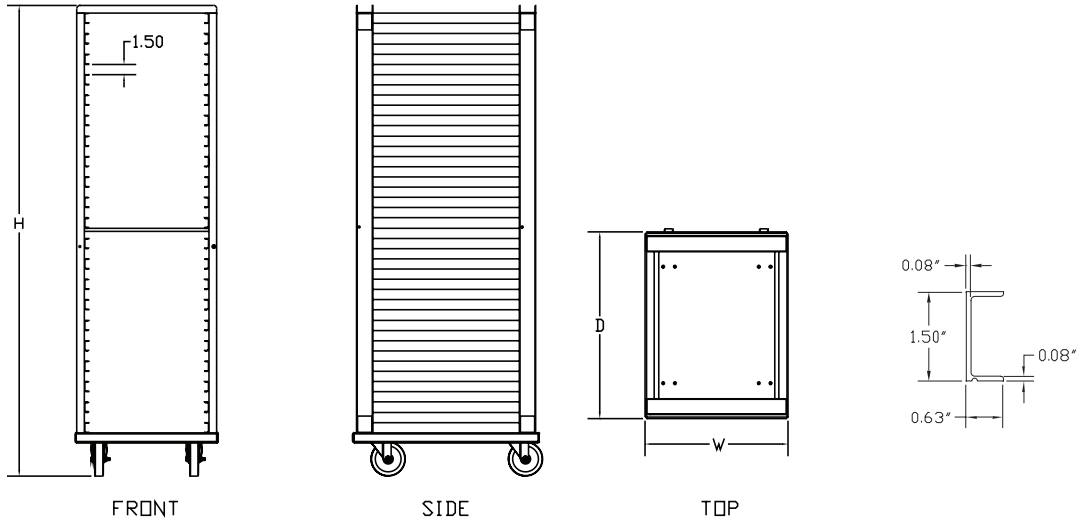

Model#	Description	Height Inches	Width Inches	Depth Inches	Channel Ht. Inches	Pan Capacity*	Ship Wt. (lbs)
DXP733	Channel, end load	57-1/4"	21	27-3/8"	2	33	81
DXP741	Channel, end load	69-1/4"	21	27-3/8"	2	41	96
DXP733S	Channel, side load	57-1/4"	29-1/8"	19-1/8"	2	33	65
DXP741S	Channel, side load	69-1/4"	29-1/8"	19-1/8"	2	41	80

*Rack capacities are for 18" x 26" sheet pans
 Custom height sizes and glide spacing available.
 Height includes casters.
 Approximate box dimensions: 70" x 23" x 29"
 Typical freight class: 250

RACKS OPTIONS / ACCESSORIES PART NUMBER

Option	Description
<input type="checkbox"/> DXPPS	Pan Stop
<input type="checkbox"/> DXPEMB	Personalized Embossment (12 letters per line)
<input type="checkbox"/> DXPFL	Floor Lock
<input type="checkbox"/> DXPPH	Push Handle
<input type="checkbox"/> DXPY5	5" Polyurethane Casters (set of 4)
<input type="checkbox"/> DXPB	Non-Marking Rubber Bumpers - Corner (set of 4)
<input type="checkbox"/> DXPPB	Non-Marking Rubber Bumpers - Full Perimeter
<input type="checkbox"/> DXPWB	Wheel Brakes (set of 2)
<input type="checkbox"/> DXP52	Heavy-duty Casters (set of 4)
<input type="checkbox"/> DXPV	Vertical Bumpers

I-5 SPEC

DINEX
www.dinex.com

4711 E. Hefner Road
 Oklahoma City, OK 73131
 800.654.8210
 405.475.5600

LIMITED WARRANTY: DINEX warrants to the original purchaser parts and labor for a period of twelve (12) months from the date of purchase. See manufacturer's complete warranty for details.

It is our policy to build equipment which is design certified by companies that have been accredited at the Federal Level by the Occupational Safety and Health Agency (OSHA) and ANSI as a National Recognized Testing Laboratory. These companies include CSA International, Underwriters Laboratories, and the National Sanitation Foundation. However, a continuing program of product improvement makes it necessary to submit new models to the agencies as they are developed. Consequently, all models may not bear the appropriate labels at all times.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Information is not for design purposes.