

P120E "C" Modular electric oven for bakery

COMPOSITION WITH 1 BAKING CHAMBER INTERNAL HEIGHT 18cm (7")



OPTIONS AND ACCESSORIES (WITH SURCHARGE)

- Leavening prover on wheels, height 800mm (31 1/2")
- Leavening prover on wheels and humidifier, height 800mm (31 1/2")
- □ Support with wheels, height 600mm (23 1/2")
- □ Support with wheels, height 800mm (31 1/2")
- □ Support with wheels, height 950mm (37 1/2")
- Additional tray holder guides for compartment and support
- □ Steamer for baking chamber
- □ Spacer element height 300mm (12")
- Refractory brick cooking surface
- Suction hood

(WITHOUT SURCHARGE)

□ Front vapour collection hood in stainless steel sheet

EXTERNAL CONSTRUCTION

- □ Structure made in folded stainless steel
- Gilde panels in pre-painted sheet metal
- □ Stainless steel hood with aluminised steel top cover
- Front vapour collection hood in HT coating steel sheet
- □ Steam duct in stainless steel plate
- □ Stainless steel double door with bottom hinge and spring balance
- Tempered glass element
- □ Handles in thermoplastic material
- Control panel on front right hand side

INTERNAL CONSTRUCTION

- Cooking surface in buckle plate
- Aluminated steel top and side structure
- Rock wool heat insulation

FUNCTIONING

- Heated by armoured heating elements
- Electronic temperature management with independent adjustment of ceiling and floor
- □ Maximum temperatura reached 450°C (840°F)
- Continuous temperature monitoring with thermocouple
- □ Vapour ducting using manual butterfly valve

STANDARD EQUIPMENT

- □ Lighting with halogen lamp
- Timer
- Economiser
- Independent maximum temperature safety device
- 20 customisable programs




MORETTI FORNI S.P.A.

www.morettiforni.com info@morettiforni.com Via A.Meucci, 4 - 61037 Mondolfo (PU) ITALIA Tel. +39.0721.96161 - Fax +39.0721.9616299 7/16



P120E "C" 1 baking chamber height 18cm (7") (assembled with support height 950mm (37 1/2"))

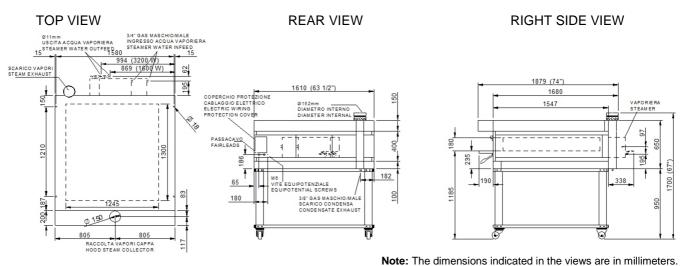

SPECIFICATIONS

The appliance comprises one cooking element and an optional leavening compartment or support. The oven cooking surface is in buckle plate that provides perfectly even heat distribution over the whole surface, making this oven particular suitable to cook bakery. Temperature adjustment is electronic, with independent control of the ceiling and floor heating elements. The oven door is hinged at the bottom, with a tempered glass window to check the state of the product while it is cooking. The support comprises a painted metal structure, whereas the leavening compartment has a stainless steel structure and is fitted with a heating thermostat. The leavening compartment can reach a maximum temperature of 65°C (150°F), whereas the maximum temperature of the baking chamber is 450°C (840°F)

All the data provided below refer to the configuration with 1 baking chamber

DIMENSIONS

SHIPPING INFORMATION

FEEDING AND POWER

External height External depth External width Weight	1700mm (67") 1879mm (74") 1610mm (63 1/2") 346kg (763lb))	Height Depth Width	900mm (36") 2052mm (81") 1810mm (72")	<i>Standard feeding</i> A.C. V240 3ph <i>Feeding on request</i> A.C. V208 3ph	
Baking surface	1,6m ² (17,22ft ²)	Weight	(396)kg (874)lb		60Hz 12,5kW
TOTAL BAKING CAPACITY		When combined compartment or s	0	Max power *Average power cons Ampère Max	6,3kWh
Tray (600x400)mm 6		Max height	1850mm (73")	30,1A (V240 3ph)	
Tray 26"x18" 4		Max weight	(518)kg (1142)lb	34,7A (V208 3ph)	
		-		Connecting cable	
				(6AWG)	
				Power supply (optional prover) A.C. V(208/240) 1ph 60 Hz	
				Max power	1,8kW
				*Average power cons Conn. Cable (14AWG)	0,9kWh

* This value is subject to variation according to the way in which the equipment is used

- NOTE: MORETTI FORNI S.P.A. reserves the right to modify the characteristics of the products illustrated in this publication without prior notice