

# MB MASTER-BILT® FUSION™ SERIES

ITEM NO. \_\_\_\_\_  
 PROJECT \_\_\_\_\_  
 LOCATION \_\_\_\_\_  
 DATE \_\_\_\_\_ QTY. \_\_\_\_\_



MBBB60NG



Approved to NSF standard for packaged food products.

## MBBB-NG SERIES Shallow Glass Door Back Bar Refrigerators

### MODELS

- MBBB48NG
- MBBB60NG
- MBBB72NG

### FEATURES

#### CONSTRUCTION

- Stainless steel top
- Black vinyl coated steel finish on front, sides and back
- Galvanized steel interior with stainless steel floors
- Foamed-in-place with low ODP polyurethane insulation
- Wall thickness: 1 1/2"
- Two adjustable epoxy-coated shelves with clips per section
- Interior LED lighting
- Adjustable temperature control
- Internal height capacity allows stacking of three "tall boy" beers

#### DOORS

- Standard door locks on each door
- Magnetic door gaskets, removable without tools
- Door openings have plastic breaker strips to reduce condensation

#### REFRIGERATION

- Self-contained refrigeration system metered by capillary tube
- Front breathing compressor on left side
- Evaporator coils coated to resist corrosion
- Condensate evaporator
- Slide-out condensing unit for easy cleaning and service
- Refrigerant: R-134a
- Temperature range: 34° to 38°F (1° to 3°C)

#### WARRANTY

- **Standard limited three year parts and labor**
- **Additional two year coverage on compressor part**

### OPTIONS

- Shelves with bottle dividers
- 4" plate casters
- Solid doors

### BID SPECIFICATIONS

Item no. MBBB\_\_\_\_NG. Provide \_\_\_\_\_ Shallow Solid Door Back Bar Refrigerator, Master-Bilt® model no. MBBB\_\_\_\_NG.

Back bar refrigerator will feature stainless steel top and black vinyl on steel finish on front, door, sides and back. Interior will be galvanized steel with stainless steel floors. Door openings will have plastic breaker

strips to reduce condensation. Adjustable epoxy-coated shelves and interior LED lighting will also be standard.

The refrigeration system will be self-contained and use R-134a refrigerant. The temperature range will be 34° to 38°F (1° to 3°C). System will be equipped with coated evaporator coils and a condensate

evaporator. Condensing unit will be slide-out type for easy cleaning and service.

Refrigerator to have standard limited 3-year parts and labor warranty with additional 2-year coverage on compressor part.

Refrigerator to be UL, C-UL and ETL Sanitation listed as well as approved to NSF standard for packaged food products.




908 Highway 15 North • New Albany, MS 38652  
 PHONE: 800-647-1284 or 662-534-9061 • FAX: 800-232-3966 or 662-534-6049 • www.master-bilt.com


### TECHNICAL SPECIFICATIONS

MODEL	DIMENSIONS (in.)			DIMENSIONS (mm)			VOLTS	AMPS	UNIT H.P.	NO. OF DOORS	NO. OF SHELVES	CAPACITY 12 OZ. CANS/ 12 OZ. BOTTLES	SHIP CU. FT.	SHIP WT. (LB/ KG)
	L	D*	H	L	D*	H								
MBBB48NG	48 <sup>1/8</sup>	26	35 <sup>3/8</sup>	1222	660	899	115	6.3	3/8	2	4	714/336	36.9	220/100
MBBB60NG	60 <sup>1/8</sup>	26	35 <sup>3/8</sup>	1527	660	899	115	6.3	3/8	2	4	966/468	45.5	298/136
MBBB72NG	72 <sup>1/8</sup>	26	35 <sup>3/8</sup>	1832	660	899	115	6.3	3/8	3	6	1218/588	54.0	360/164


\* Depth includes door handles.




MBBB48NG PLAN VIEW

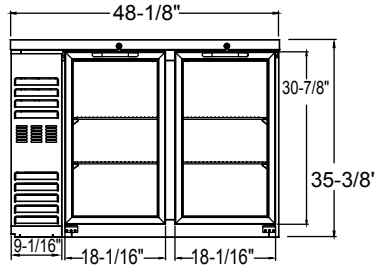


MBBB48NG ELEVATION VIEW




ALL MODELS  
SIDE VIEW

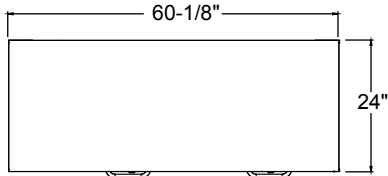


MBBB60NG PLAN VIEW

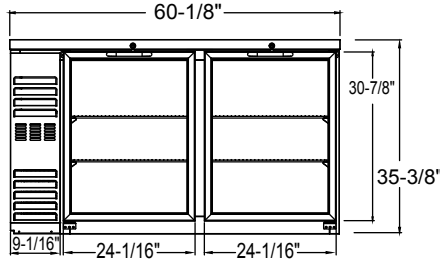

MBBB60NG ELEVATION VIEW

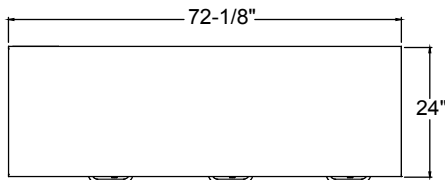

MBBB72NG PLAN VIEW

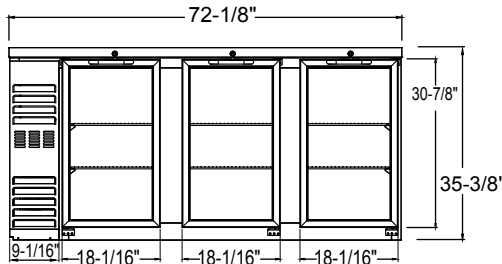

MBBB72NG ELEVATION VIEW


### LISTINGS



Approved to NSF standard for packaged food products.

### HOOKUP

All models via plug in, 9 foot long flexible three wire 14 gauge cord with molded plug.



NEMA 5-15P

**NOTE:** Cabinet designed for optimum performance in air-conditioned area at 75°F ambient and 55% relative humidity. All specifications subject to change without notice.