REACH-IN FREEZER (0°F)

Model: **1FENPT**

Natural Refrigerant R-290 Model

1-Section Extra-Wide Pass-Thru Freezer


1FENPT - Stainless steel front, aluminum end panels and interior **1FENSA-PT** - Stainless steel exterior, aluminum interior **1FENSS-PT** - Stainless steel exterior and interior



Options and Accessories

(upcharge and le	ad times may apply)	
Additional epoxy coated steel shelves	Half doors	
Chrome or stainless steel shelves	Special electrical req. (consult factory)	
Rehinging of doors (consult factory)	Correctional Facility Options	
Pan slide assemblies	One way security screws	
Adjustable legs	• Locking hasp (lock not included)	
Custom laminates	Stainless steel mesh cover	
	Coverless hinges	

Consult factory for other model configurations, options and accessories.



Standard Model Features

REFRIGERATION SYSTEM

Self contained, performance rated "plug" refrigeration system Natural, environmentally safe, high efficiency R-290 refrigerant¹ Refrigeration system is readily accessible on top of cabinet, separate from the "food zone"

Automatic, hot gas condensate evaporator

Expansion valve system

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation
Smooth, polished chrome workflow door handle
Cam action, lift off hinges
Self-closing door
Magnetic snap in Santoprene™ door gasket
Cylinder lock in door
Heavy duty, epoxy coated steel shelves
Heavy duty pilaster strips
5" casters

MODEL FEATURES

LED interior lighting

Electronic controller with digital display & hi-low alarm Top and side air distribution ducts Automatic electric defrost Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at job site

¹ R-290 refrigerant meets all federal and state regulatory requirements.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

DIMENSIONAL DATA	
Net Capacity (cubic feet)	22 (623 cu l)
Width, Overall (inches)	28 ½ (724 mm)
Depth, Overall (inches) (including handles)	38 ¾ (984 mm)
Depth (inches) (less doors)	32 (813 mm)
Depth (inches) (doors open 90°)	84 (2134 mm
Clear Door Width (inches)	21 7⁄8 (556 mm)
Clear Door Height (inches)	58 5⁄8 (1489 mm)
Height, Overall (inches) (including 5" casters)	82 ¼ (2089 mm)
Number of Doors	2
Number of Shelves	3
Shelf Area (square feet)	20.4 (1.9 sq m)
Tray Slide Capacity	24
REFRIGERANT DATA	
Condensing Unit Size (H.P.)	1/2
Capacity (BTU per hour)*	1590
ELECTRICAL DATA	
Voltage (International)	115/60/1 (220/50/1)
Feed Wires (including ground)	3
Total Amps (International)	6.9 (4.2)
Defrost Amps (International)	4.3 (2.2)
10 ft. Cord/Plug [attached] (International)	Yes (No)
SHIPPING DATA	
Height - Crated (inches)	85 ½ (2172 mm)
Width - Crated (inches)	31 5⁄8 (803 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	65 (1841 cu l)
Weight Std - Crated (pounds)	375 (170 kg)
Weight SS - Crated (pounds)	435 (197 kg)

* Rating @ -15°F evaporator, 90°F ambient Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)



Toll-Free: 800-523-7138 Phone: 215-244-1400

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com


> udly Designed and embled in the USA


Fax: 215-244-9579

Due to our continued efforts in developing innovative products, specifications subject to change without notice.



© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc. **Model Plan Views**

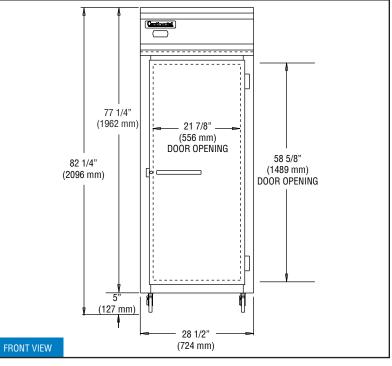

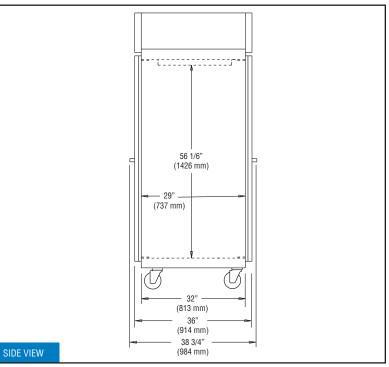

IMPORTANT NOTE: If the cabinet is located under a low ceiling, a <u>minimum clearance of 12" is required on</u> top and 3" on sides.