

### Heated Self-Service Case - 32"D



MODEL SHOWN: B3632H

NOTE: SHOWN WITH OPTIONAL STAINLESS STEEL EXTERIOR

- ☐ B2432H
- ☐ B2432H-4
- ☐ B3632H
- ☐ B3632H-4

Lengths include end panels

- 24-1/2"L x 32-1/4"D x 82-1/2"H
- 24-1/2"L x 32-1/4"D x 82-1/2"H
- 36-1/2"L x 32-1/4"D x 82-1/2"H
- 36-1/2"L x 32-1/4"D x 82-1/2"H

#### STANDARD FEATURES

- NOTE: The additional shelf option significantly increases electrical load for model. Refer to the -4 suffix model for these specifications.
- Flat upper front panel & header
- Integrated average product temperature of 160°F
- One year parts & labor warranty
- Shelving removable and adjustable on 1" centers
- Stainless steel interior
- Top light (matches shelf lights)

| Features                | Standard                                                                                                 | Options                                                                                                                                                                                                                                                                                                                                              |
|-------------------------|----------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| EXTERIOR COLOR          | <input type="checkbox"/> Laminated (non-premium) Confirm pattern/grain direction                         | <input type="checkbox"/> Laminated (premium) Confirm pattern/grain direction<br><input type="checkbox"/> Stainless steel (includes lower front panel)                                                                                                                                                                                                |
| LOWER FRONT PANEL COLOR | <input type="checkbox"/> Painted - Black                                                                 | <input type="checkbox"/> Stainless steel (w/stainless ext. only)                                                                                                                                                                                                                                                                                     |
| BASE                    | <input type="checkbox"/> Casters w/ levelers                                                             |                                                                                                                                                                                                                                                                                                                                                      |
| END PANEL LEFT          | <input type="checkbox"/> Full end panel w/mirror interior (metal edge matches interior color)            | <input type="checkbox"/> Cutaway end panel (metal edge matches interior color)                                                                                                                                                                                                                                                                       |
| END PANEL RIGHT         | <input type="checkbox"/> Full end panel w/mirror interior (metal edge matches interior color)            | <input type="checkbox"/> Cutaway end panel (metal edge matches interior color)                                                                                                                                                                                                                                                                       |
| EXTERIOR BACK PANEL     | <input type="checkbox"/> Solid back panel, black                                                         | <input type="checkbox"/> Rear loading swing out doors (black)<br><input type="checkbox"/> Rear loading swing out doors (stainless)                                                                                                                                                                                                                   |
| SHELVING                | <input type="checkbox"/> Individually controlled solid heated shelves, lighted (incandescent) - 3 levels | <input type="checkbox"/> Individually controlled solid heated shelves, lighted (ceramic metal halide) - 3 levels<br><input type="checkbox"/> 1 Individually controlled solid heated shelves, lighted (ceramic metal halide) - 4 levels<br><input type="checkbox"/> 2 Individually controlled solid heated shelves, lighted (incandescent) - 4 levels |
| LIGHTS                  | <input type="checkbox"/> Incandescent lights                                                             | <input type="checkbox"/> Ceramic Metal Halide high efficiency lighting                                                                                                                                                                                                                                                                               |
| ELECTRICAL CONNECT      | <input type="checkbox"/> 6' straight blade power cord                                                    | <input type="checkbox"/> 6' locking blade power cord                                                                                                                                                                                                                                                                                                 |
| MISCELLANEOUS           |                                                                                                          | <input type="checkbox"/> Second year parts & labor warranty (excludes compressor)                                                                                                                                                                                                                                                                    |
| ACCESSORIES             |                                                                                                          | <input type="checkbox"/> Price tag molding (matches interior color)                                                                                                                                                                                                                                                                                  |

Option Notes: 1 - See -4 tech spec for load reqmts  
2 - See -4 tech spec for load reqmts


# Oasis®

## Product Specifications


**Intended Environment:** Type I - Designed to operate in ambient conditions of 75°F with 55% relative humidity unless noted otherwise in system information below.

| Zone | Intended Product To Be Displayed | Warmest Avg Prod Temp ° F |
|------|----------------------------------|---------------------------|
| 1    | Packaged heated product          | 160                       |

### PLAN VIEW

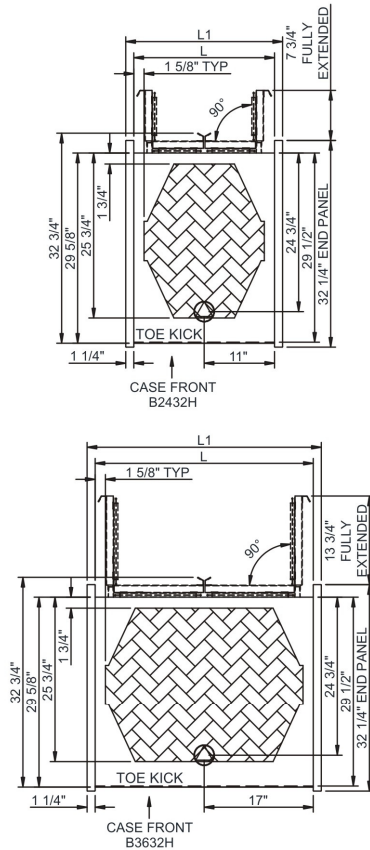

### SIDE VIEW

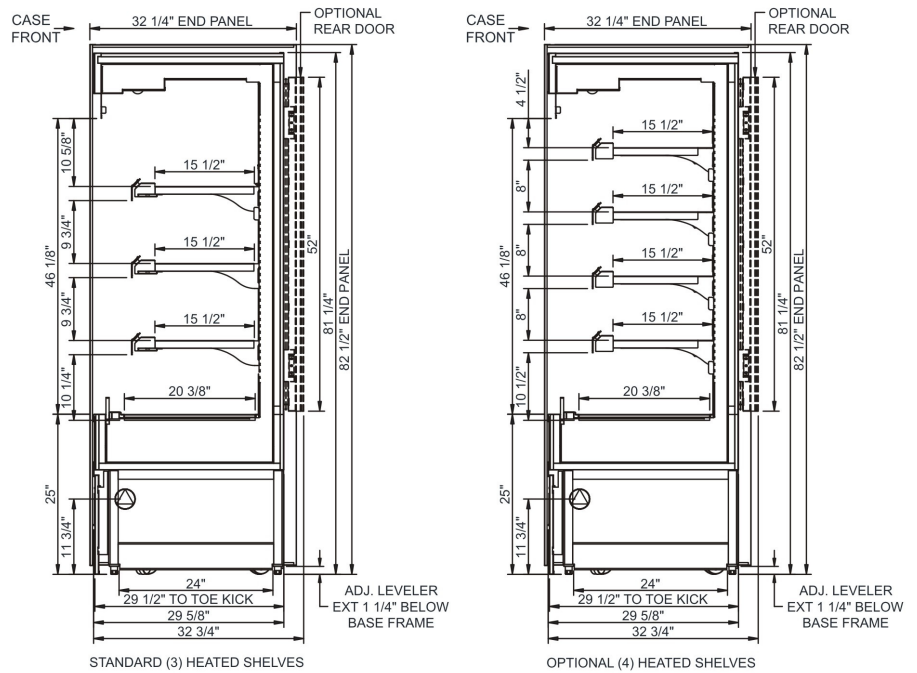

**NOTE: ALL DIMENSIONS APPROXIMATE**

- ELECTRICAL JUNCTION BOX (SUPPLIED WITH 6\"/>
- LOCATION OF DRAIN TUBE FOR REMOTE REF. ONLY (SUPPLIED WITH 3/4\"/>
- REFRIGERATION LINE CONNECTION.
- REMOTE FLOOR SINK & UTILITIES ACCESS AREA.
- SELF-CONTAINED CASE SERVICE ACCESS AREA.
- DRY CASE SERVICE ACCESS AREA.

### Model Technical Specifications

| Model    | L"  | L1"   | L2" |      | System Circuit Volts | Phs | Freq | Amps *** | Watts | Wires | NEMA Plug       | SST | Conv. Rack BTUH | Para. Rack BTUH | Est Wt |
|----------|-----|-------|-----|------|----------------------|-----|------|----------|-------|-------|-----------------|-----|-----------------|-----------------|--------|
| B2432H   | N/A | 24.50 | .00 | Heat | Circuit #1 208-240   | 1   | 60   | 13.91    | 2,942 | 2+G   | 6-20P or L6-20P | N/A | N/A             | N/A             | 800    |
| B2432H-4 | N/A | 24.50 | .00 | Heat | Circuit #1 208-240   | 1   | 60   | 15.30    | 3,252 | 2+G   | 6-20P or L6-20P | N/A | N/A             | N/A             | 800    |
| B3632H   | N/A | 36.50 | .00 | Heat | Circuit #1 208-240   | 1   | 60   | 20.34    | 4,296 | 2+G   | 6-30P or L6-30P | N/A | N/A             | N/A             | 1,000  |
| B3632H-4 | N/A | 36.50 | .00 | Heat | Circuit #1 208-240   | 1   | 60   | 23.54    | 5,031 | 2+G   | 6-30P or L6-30P | N/A | N/A             | N/A             | 1,000  |

\*\*\* Does not include electric defrost on freezer models.

#### Regulatory Approvals:

All Models ETL Listed to UL 197  
ETL Listed to CAN/CSA 22.2 No. 109  
ETL Sanitation to NSF 4



#### Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle
- 2) Performance issues (product temperatures, water on floor, etc.) caused by adverse conditions are not covered by warranty.
- 3) Keep unit at least 15' from exterior doors, overhead HVAC vents, or any air curtain disruption.
- 4) Do not expose unit to direct sunlight or any heat source (ovens, fryers, etc.).

**⚠ WARNING:** This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).