# **Simplicity**Series

## **Solid Top Serving Counter**

Molded Fiberglass (MF) or Laminate Panel (LP) or Stainless Steel (SS)

SimplicitySeries utilizes in stock and ready-to-release components that have

Length

28 3/8"

36 3/8" 50 3/8"

60 <sup>3/8"</sup>

74 3/8"

✓ 30" wide 14 gauge stainless steel top

✓ Storage Base Standard ✓ 5" Plate Mounted Swivel Casters

Shipped fully assembled

 Cam Operated Line-up Locks ✓ Open Storage Base ✓ 36" A.F.F.

shorter lead times.

Proiect: \_

Quantity: \_\_\_\_

Item:

Date: \_

Models

SIM-ST-28

SIM-ST-36

□ SIM-ST-50

SIM-ST-60

SIM-ST-74 Standard Features



SIM-ST-60-LP shown with option: (A) Beaded, stainless steel tray slide.



### **Specifications**

Top - Top to be 30" wide and fabricated from a minimum of 14 ga. stainless steel with square turndown on all sides and corners fully welded, ground and polished. Top to have #4 satin finish and with all edges having a #7 hi-lite finish.

Body (MF) - Body to be seamless molded fiberglass (F.R.P.) with smooth exterior surfaces and rounded corners. To be constructed by a hand laid process with four layers of 1.5 oz continuous

- Most versatile counters, add the options vou need!
- Easy to clean, low maintenance

strand fiberglass mat, plus a 24 oz layer of woven roving on the bottom for added strength. Fiberglass to be flame retardant per specification ASTM E-162 having a flame spread of 25% or less. Body interior to be reinforced at each end with 4" wide, 12 gauge galvanized channels welded to form integral U frame for maximum stress relief.

Body (LP) - Standard grade laminate to cover all sides of an 18 gauge steel uni-body structure. Interior reinforced with 12 gauge galvanized

uprights to support shelving and a 20 gauge steel bottom. Corners and bottom edge provided with 1/2 stainless steel trim strips.

Body (SS) - Uni-body structure, fabricated from 18 gauge stainless steel, welded ground and polished. Interior reinforced with 12 gauge galvanized uprights to support shelving and a 20 gauge steel bottom.

### **Options**

#### Above the Top

- CCCP Crystal Clear Counter Protector
- CCSB Crystal Clear Self-service
- single buffet shield
- CCDB Crystal Clear Self-service double buffet shield
- □ (GA) Sloped Front Protector, Stainless Steel Top, Adjustable
- □ (GC) Sloped Front Protector, Stainless Steel Top, Fixed Glass
- □ (M) Buffet Shield Single Service Hinged
- (N) Buffet Shield Double Service Hinged
- (RR) LED Lights
- GRA Heatlamp
- GRAL Heatlamp with light

Changing

- Tray Slide/Cutting Boards\*\*
- □ (A) 10" Beaded, stainless steel tray slide □ Single side
  - Dual side
- □ (B) 10" Flat Surface, stainless steel tray slide □ Single side
  - Dual side
- □ (D) 6" wide Stainless Steel cutting board □ Single side
  - Dual side
- □ (FF) 12" End Drop Shelf
- \*\*Mounted flush with top or 2" below top

#### **Exterior Finishes**

□ Molded Fiberglass (MF)

- □ Stainless Steel (SS)
- Laminate over Galvanized (LP)(Standard laminate finishes - consult factory for questions)

#### Mount Option

6" stainless steel leas with stainless steel adjustable bullet foot

#### **Base Option**

- Elementary Height 32" A.F.F (selecting this option converts to 12" high
- storage bases in lieu of standard) Enclosed base, no storage
- SIS No. 00-0-0(


REV 4/25/23 - Printed in the U.S.A.



LTI, Inc. 1947 Bill Casey Parkway how food is served. Jonesboro, GA 30236

(888) 584-2722 lowtempind.com Approvals:

# **Solid Top Serving Counter** Molded Fiberglass (MF) or Laminate Panel (LP) or Stainless Steel (SS)

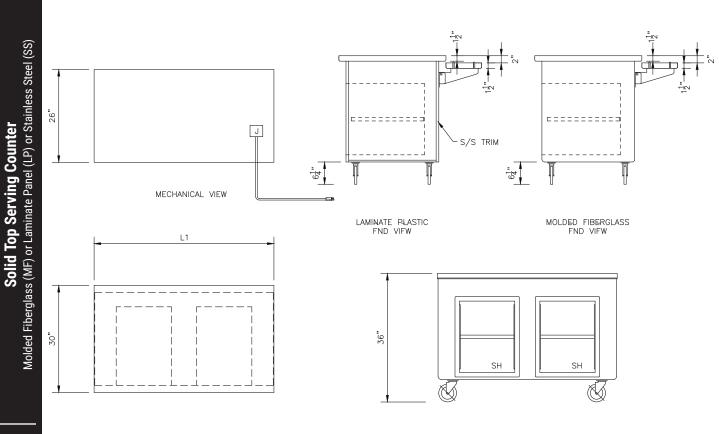

PLAN VIEW

REAR VIEW

Model	L (Length)	Storage	Approx. Ship Weight
SIM-ST-28	28 <sup>3/8"</sup>	(1) 15"	205 lbs.
SIM-ST-36	36 <sup>3/8"</sup>	(1) 15"	220 lbs.
SIM-ST-50	50 <sup>3/8"</sup>	(2) 15"	260 lbs.
SIM-ST-60	60 <sup>3/8*</sup>	(2) 15"	300 lbs.
SIM-ST-74	74 <sup>3/8*</sup>	(3) 15"	340 lbs.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacement for previously purchased equipment.

All equipment to be built in accordance with the Underwriters Laboratories. Inc. and the National Sanitation Foundation. Inc. standards and shall bear the Underwriters Laboratories, Inc. listing label for safety and the Underwriters Laboratories classification label for sanitation.

A.I.A. File No. 00-0-00

REV 4/25/23 - Printed in the U.S.A

(888) 584-2722 lowtempind.com

