DESIGNER LINE ROLL-IN FREEZER (0°F)

Model: D2FIN



2-Section Roll-In Freezer with 661/4" Cart Capacity



ENERGY STAR® Qualified Commercial Refrigerator

D2FIN - Stainless steel front, aluminum end panels and interior

D2FINSA - Stainless steel exterior, aluminum interior

D2FINSS - Stainless steel exterior and interior



Options and Accessories

(upcharge and lead times may apply)

Stainless steel case back	Special electrical req. (consult factory)	
Epoxy coated steel shelves	Extra-High (consult factory)	
Chrome or stainless steel shelves	Correctional Facility Options	
Rehinging of doors (consult factory)	One way security screws	
Custom laminates	Locking hasp (lock not included)	
Half doors	Stainless steel mesh cover	
Roll-Thru (consult factory)	Coverless hinges	

Consult factory for other model configurations, options and accessories.

Continenta]®
Refrigerati	10



Project Name:	
Model Specified:	
Location:	
Item No:	Quantity:
AIA #:	SIS #:

Standard Model Features

REFRIGERATION SYSTEM

Self contained, performance rated "plug" refrigeration system

Natural, environmentally safe, high efficiency R-290 refrigerant¹

Refrigeration system is readily accessible on top of cabinet, separate from the "food zone"

Automatic, hot gas condensate evaporator

Expansion valve system

Standard operating temperature is 0 to -5°F and can be adjusted to operate as low as -10°F in a 90°F ambient.

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Magnetic snap in Santoprene™ door gaskets

Cylinder lock in each door

Self-closing doors

66 ½" high door opening (66 ¼"H rack capacity*)

MODEL FEATURES

Electronic controller with digital display & hi-low alarm

LED interior lighting

Top and side air distribution ducts

Off-cycle defrost

Cabinet upper side panels and refrigeration "plug" system can be removed and reinstalled at job site

Removable stainless steel rack guides

Removable stainless steel ramps

Reinforced stainless steel floor

* Rack not supplied

IMPORTANT NOTE: ¹ R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:


Model Specifications


DIMENSIONAL DATA	
Net Capacity (cubic feet)	64 (1812 cu I)
Width, Overall (inches)	68 ½ (1740 mm)
Depth, Overall (inches) (including handles)	35 3/8 (899 mm)
Depth (inches) (less doors)	32 (813 mm)
Depth (inches) (doors open 90°)	65 (1651 mm)
Clear Door Width (inches)	27 3/8 (695 mm)
Clear Full Door Height (inches)	66 ½ (1676 mm)
Height, Overall (inches)	86 (2184 mm)
Number of Door(s)	2
Rack Capacity**	2
REFRIGERANT DATA	
Condensing Unit Size (H.P.)	1 1/4
Capacity (BTU per hour)*	4150
ELECTRICAL DATA	
Voltage (International)	115/208-230/60/1 (220/50/1)
Feed Wires (with ground)	4
Total Amps (International)	11.7 (6.6)
Defrost Amps (International)	5.2 (2.6)
10 ft. Cord/Plug (International)	Yes (No)
SHIPPING DATA	
Height - Crated (inches)	94 (2288 mm)
Width - Crated (inches)	77 (1956 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	168 (4757 cu l)
Weight Std - Crated (pounds)	750 (340 kg)

^{*} Rating @ -15°F evaporator, 90°F ambient

Weight SS - Crated (pounds)

Model Plan Views

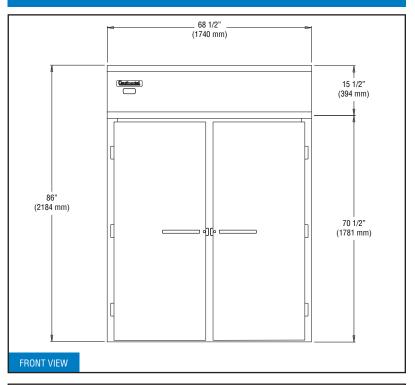

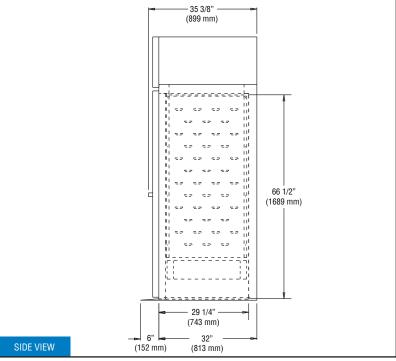

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a <u>minimum</u> clearance of 12" is required on top and 3" on sides and rear.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

910 (413 kg)

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.







© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.



Equipped with one NEMA L14-20P plug (varies by country)

 $^{^{**}}$ Maximum rack size including wheels - 27"W x 29"D x 66 $1\!\!/\!4$ "H Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.