



CLASSIC II

Deli/Pastry/Chocolate Showcase

CLASSIC II DELI/PASTRY/CHOCOLATE

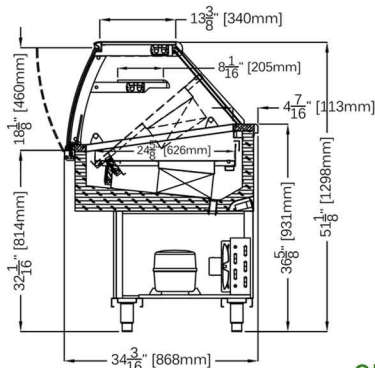

OPTIONAL: COLD STORAGE

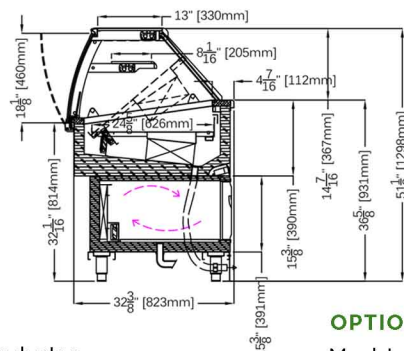


STANDARD FEATURES

Stainless steel insulated body with tubular painted galvanized chassis
Silver trim finish
Dixell digital controller
Air cooled condensing unit
Temperature front and side glass single pane with anti-fog serigraph
Tilt back front glass
LED lighting
Plexiglass sliding doors
Stainless steel work bench
Pastry with drawer (static refrigeration)
Cases ship standard unfinished front and stainless steel skin sides

OPTIONS

Marble/Granite work counter
RAL color finish/wood laminate
Champagne trim finish
Roll down curtain
Remote/water cooled unit
Matching front cabinetry counters with top glass
Canopy lighting
Stainless steel step up deck shelf
Cold storage option with static refrigeration and separate control
Casters



90° Open Corner

CLASSIC II DELI/PASTRY/CHOCOLATE						
TECHNICAL FEATURES		MODELS				
		CLASSIC II CIIDPC900	CLASSIC II CIIDPC1300	CLASSIC II CIIDPC1700	CLASSIC II CIIDPC2106	CLASSIC II CIIDPCA90
External Dimensions (L-D-H)	Inches	35 7/16" - 34 3/16" - 51 1/8"	51 3/16" - 34 3/16" - 51 1/8"	66 15/16" - 34 3/16" - 51 1/8"	82 15/16" - 34 3/16" - 51 1/8"	80 7/8" - 34 3/16" - 51 1/8"
Inches-MM	MM	900 - 868 - 1298	1300 - 868 - 1298	1700 - 868 - 1298	2106 - 868 - 1298	2055 - 868 - 1298
Crated Dimensions (L-D-H)	Inches	43 1/3" - 39 3/8" - 55 1/8"	59" - 39 3/8" - 55 1/8"	74 7/8" - 39 3/8" - 55 1/8"	90 1/2" - 39 3/8" - 55 1/8"	87" - 45" - 55 1/8"
Inches-MM	MM	1100 - 1000 - 1400	1500 - 1000 - 1400	1900 - 1000 - 1400	2300 - 1000 - 1400	2209 - 1143 - 1400
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	1 / Hermetic	1 / Hermetic	1 / Hermetic
BTU'S @ +14°F Evap	BTU's	2350 BTU'S	2945 BTU'S	3450 BTU'S	3975 BTU'S	2940 BTU'S
Temperature (+35°F Chocolate)	BTU's	230/1/50 (EU)	230/1/50 (EU)	230/1/50 (EU)	230/1/50 (EU)	230/1/50 (EU)
Electric Supply*	(V/Ph/Hz)	120/1/60 (USA)	120/1/60 (USA)	120/1/60 (USA)	120/1/60 (USA)	120/1/60 (USA)
Power Consumption	(W/A)	565W / 5.5A	680W / 6A	885W / 6.5A	885W / 7.5A	885W / 5.5A
Deck Operating Temperature*	°F	39°F	39°F	39°F	39°F	39°F
Net Weights	Kg/Lb	94Kgs / 216Lbs	118Kgs / 271Lbs	130Kgs / 299Lbs	180Kgs / 396Lbs	140Kgs / 308Lbs
Crated Weights	Kg/Lb	110Kgs / 253Lbs	138Kgs / 318Lbs	155Kgs / 356Lbs	205Kgs / 451Lbs	175Kgs / 385Lbs

* Dimensions are without side panels

* Any and all shelves above the deck will NOT be refrigerated on these models

* Chocolate 220V

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.



361-367 Beach Road, Burlingame, CA 94010
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com

