



Item: _____
Quantity: _____
Project: _____

Royal Series

Models: ☐ RRE-8 ☐ RRE-6GT12 ☐ RRE-4GT24 ☐ RRE-2GT36 ☐ RRE-GT48



Voltage: ☐ 208V ☐ 240V
Phase: ☐ 1 Phase ☐ 3 Phase

Options and Accessories

- ☐ 6" high S/S stub back in lieu of high shelf
- ☐ 1" thick griddle plate
- ☐ Griddle on right (Left hand side standard)
- ☐ Chrome griddle plate
- ☐ Grooved griddle (specify width: _____")
- ☐ 9" deep S/S front landing ledge, with or without sauce pan cutouts
- ☐ One 26½" Convection Oven - add suffix "-126C"
Cabinet space: ☐ Left ☐ Right
- ☐ One standard 26½" W Oven - add suffix "-126"
Cabinet space: ☐ Left ☐ Right
- ☐ One standard 20" W Oven - add suffix "-120"
Cabinet space: ☐ Left ☐ Right
- ☐ Open storage cabinet base - add suffix "-XB"
- ☐ Additional oven racks
- ☐ Cabinet doors
- ☐ Intermediate shelf
- ☐ 5" swivel casters (set of four - 2 locking)

Standard Features


- Stainless steel front, sides, control panel and kick plate including backguard and high shelf
- Stainless steel full width drip tray
- Two 20" wide ovens
- Accommodates 18" x 26" full size sheet pan
- Oven with 4 KW heating element
- Oven thermostat controls, 200°-500°F
- Five position heavy gauge chrome rack guides
- One chrome rack per oven
- Five surface porcelain oven interior
- 9" solid hot plate elements, 2KW each
- 3/4 thick polished steel griddle plate
- GT Griddle Series - standard with thermostat every 12"



2 YEAR LIMITED, PARTS AND LABOR WARRANTY

48" Electric Restaurant Range

48" Electric Restaurant Range

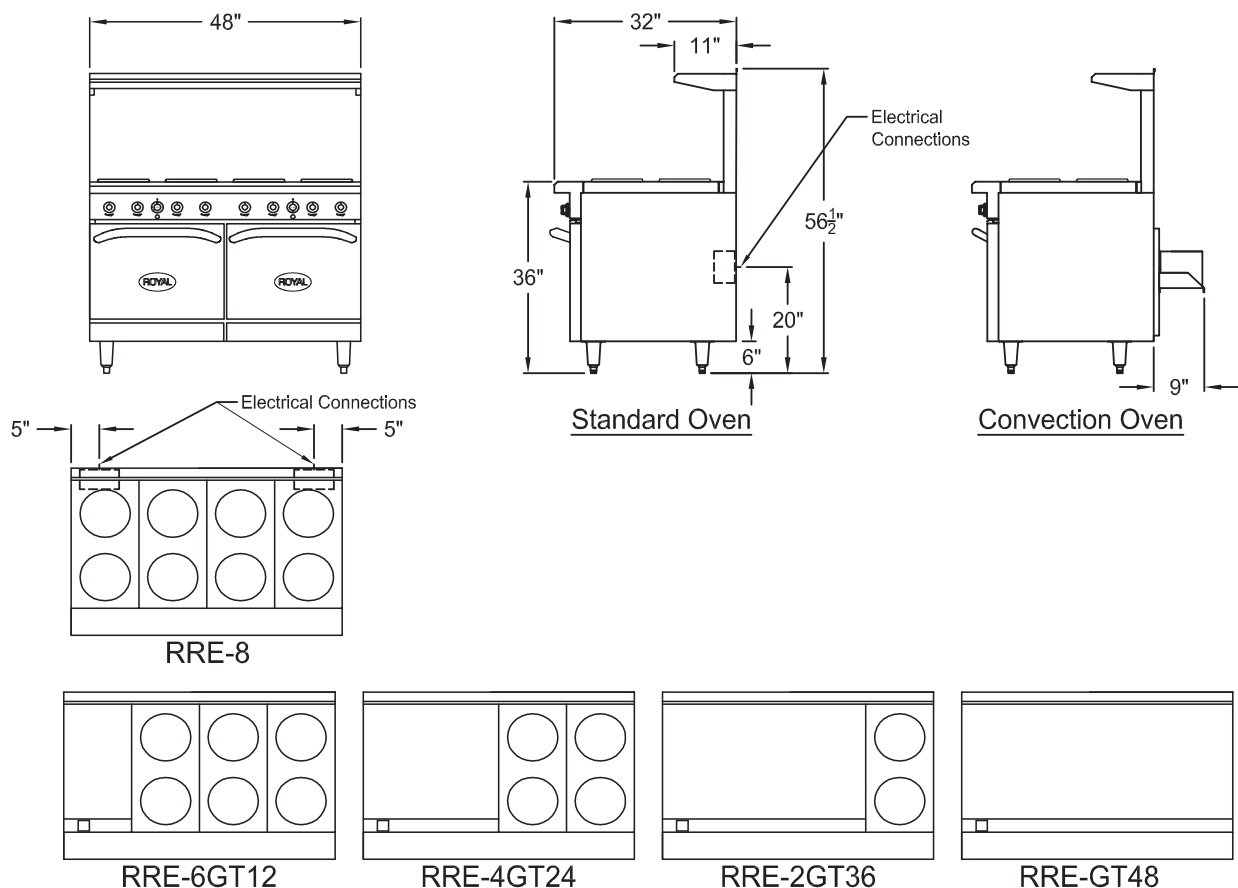

Model	Total KW	Voltage	A M P S					
			1 Phase		3 Phase			
			L1	L3	L1	L2	L3	Ship Wt.
RRE-8	24	208	120	120	92	76	92	800
		240	104	104	80	64	80	
RRE-6GT12	23.4	208	115	115	88	76	84	820
		240	100	100	80	68	74	
RRE-4GT24	22.8	208	112	112	80	68	80	830
		240	97	97	72	60	72	
RRE-2GT36	22.2	208	109	109	76	68	72	850
		240	95	95	72	64	66	
RRE-GT48	21.6	208	106	106	68	60	68	870
		240	92	92	64	56	64	

48" Electric Range units have two electrical connections.

To be installed only in noncombustible surroundings. See installation instructions.

For convection ovens: add 4 amps plus 75# shipping weight.

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification.

Royal Range of California, Inc.
3245 Corridor Dr. • Eastvale, CA 91752 • (800) 769-2414 • (951) 360-1600
Fax: (951) 360-7500 • www.royalranges.com • sales@royalranges.com