



COMMERCIAL

Refrigeration Equipment 2-Drawer Under Counter Refrigerator 27" Long 32.5" Tall

ITEM #

MODEL #

NAME #

SIS #

AIA #



738337 (KCHUC27.2DR-32)

2-Drawer Under Counter
Refrigerator 27" Long 32.5"
Tall

Short Form Specification

Item No.

2-drawer refrigerator counter top, 32.5 inch tall, with exterior back panel, exterior bottom panel, and exterior top panel in galvanized steel, exterior side panel in 430 stainless steel; interior back, top and bottom panels in 304 stainless steel. Fin & tube condenser to improve the performances in high temperature environments. Automatic Defrost Cooling System and temperature control. Vinyl heavy duty adjustable, easy to handle and clean shelves. External temperature display.

R600a gas in refrigeration circuit.
ETL Safety and Sanitation certified.
3/5 Years warranty.

Main Features

- External temperature display.
- Removable gasket for easy cleaning operations.
- Fin & Tube Condenser improves performance in high temperature environments.
- Automatic Defrost Cooling System provides worry-free performance.
- Electronic Temperature Control, quick and simple to set, with control display for easy monitoring.
- Heavy duty Vinyl coated steel shelves.
- Cabinet completely insulated with high density polyurethane for low environmental impact.

Construction

- Stainless steel interior and exterior, durable and easy to clean for daily commercial use.
- Heavy duty casters.
- Pre-wired heavy duty power cord.
- Magnetic gasket removable without tools for easy cleaning.
- Heavy duty drawer runners.

Sustainability

- CFC and HCFC free (ecological refrigerant type: R600a).
- High efficiency components to minimize the energy consumption still guaranteeing the highest performances.

Optional Accessories

- 1 ADJUSTABLE FOOT PNC 206445 ☐

APPROVAL: _____


Part of




Electrolux
Professional
Group

Kelvinator Commercial
www.kelvinatorcommercial.com

Front

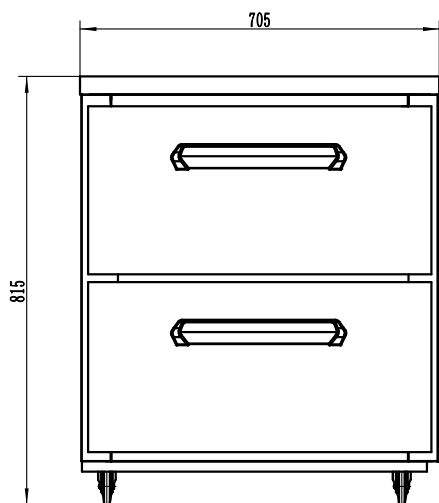


Side

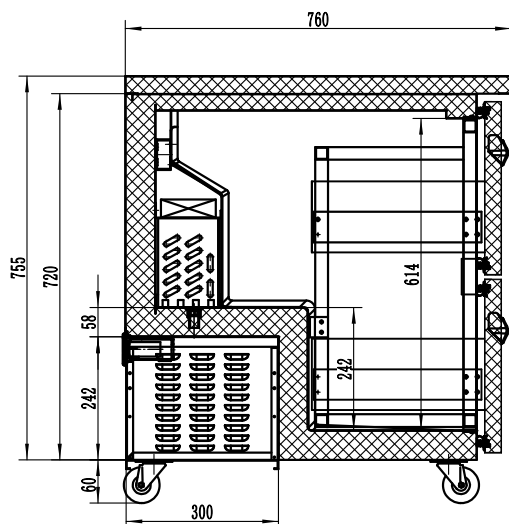

EI = Electrical connection

Top

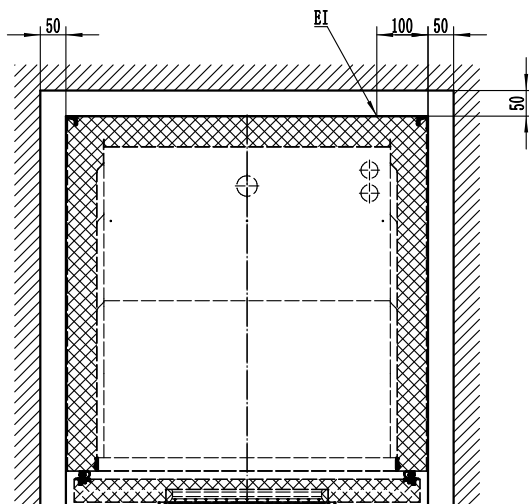

Electric

Supply voltage:	738337 (KCHUC27.2DR-32)	115 V/1 ph/60 Hz
Electrical power, max:		0.16 kW
Plug type:		USA NEMA 5-15P

Capacity:

Gross capacity:	6.5 cu.feet
-----------------	-------------

Key Information:

Door hinges:	Slide in
External dimensions, Width:	27 3/4" (705 mm)
External dimensions, Depth:	29 15/16" (760 mm)
External dimensions, Height:	32 1/16" (815 mm)
Internal Dimensions (depth):	22 13/16"
Internal Dimensions (height):	23 1/2"
Internal Dimensions (width):	22 1/4"
Shipping height:	34 13/16" (885 mm)
Shipping weight:	198 lbs (89.8113 kg)
Shipping volume:	18.62 ft ³ (0.53 m ³)
Type of external material:	Stainless Steel
Type of internal material:	Polystyrene
Warranty:	3 / 5 years
Approvals	ETL C&US;ETL SANITATION

Refrigeration Data

Current absorbed:	1.5 Amps
Compressor power:	1/10 hp
Operating temperature min.:	32 °F
Operating temperature max.:	41 °F
Condenser type:	Fin & tube
Defrost type:	Auto Defrost

Sustainability

Refrigerant type:	R600a
Refrigerant weight:	70 g