



## ULG BOTTOM MOUNT GLASS DOOR MERCHANDISERS

ULG low temperature glass door merchandisers manufactured by Global Refrigeration are unsurpassed in performance, reliability, durability and offer the best return on investment in the industry. Using the patented Kelvinator design/upgrades, the highest quality material and components offer a merchandiser with the Global LED lighting system which illuminates and displays product like no other merchandiser in the market. The bottom mount merchandisers are available in ulg ulg30 (1 door), ulg50 (2 door) and ulg80 (3 door) models which gives the user the option to create merchandising walls of variable lengths to fit the design of the store.



All products are certified for energy, safety and sanitation. NSF/ANSI 7 Standards

### FEATURES

- Entire cabinet foamed in place using high density, polyurethane insulation
- 20 gauge steel interior and exterior
- Digital temperature controller with programmable defrost and LED display Auto door switch turns off fans if door opens eliminating frost & icing issues
- Bottom mount compressor
- Heated drain pan dissipates condensation; no plumbing required
- (4) adjustable cantilever shelves & (1) bottom shelf Temperature Range 0F to -20F

### ACCESSORIES

- Cantilever Shelf Kits
- Caster Base Kit
- Black Color Option
- Stainless Steel Exterior Option

**Kelvinator**

# BOTTOM MOUNT VERTICAL MERCHANDISERS

## Refrigerant Type: R290

### TECHNICAL DATA



MODEL	ULG 30	ULG 50	ULG 80
<b>Temp Range</b>	0°F to -20°F	0°F to -20°F	0°F to -20°F
<b>Exterior Dimensions</b>			
Length	31"	52"	78"
Depth	36.88"	36.88"	36.88"
Height	79.75"	79.75"	79.75"
<b>Interior Dimensions</b>			
Length	26 1/4"	47 1/4"	73 1/4"
Depth	29 5/8"	29 5/8"	29 5/8"
Height	60 5/8"	60 5/8"	60 5/8"
<b>Capacity</b>	27.3 cu. ft.	49.1 cu. ft.	76.2 cu. ft.
<b>Shipping Weight</b>	516 lbs.	780 lbs.	1,038 lbs.
<b>Refrigerant Type</b>	R290	R290	R290
<b>Electrical</b>	115/60/1	115/60/1	115/60/1
<b>Fuse Size</b>	20	20-30	20-30
<b>Rated Amps</b>	11.0	12.0	14.0

### SPECIFICATIONS

#### ULG30S, 50B, 80B

Bottom mount low temperature merchandiser, Global model ULG \_\_\_\_\_. The unit shall consist of white powder coat finished galvanized steel interior & exterior, foamed in place. The unit will be supplied with 4 cantilever shelves and a bottom shelf per door opening.

Cabinet as specified to use R290 refrigerant. Refrigeration control shall be thermostatic control with a temperature range of 0°F to -20°F. Cabinet to have independent on/off switch for compressor and lights.

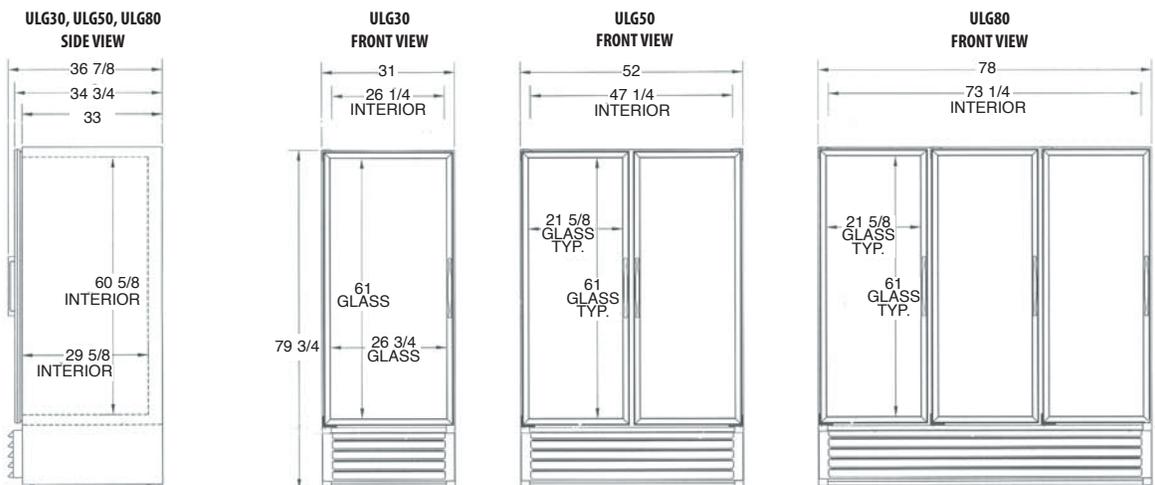

Cabinet designed for optimum performance in air-conditioned area at 70°F to 75°F ambient temperature and 50% to 55% relative humidity.

Global Refrigeration, Inc., reserves the right to change specifications, terms, and prices without notice.

**Global Refrigeration, Inc.**

5855 Grant Avenue, Cleveland, OH 44105

888.650.9799

www.globalref.com