

*The **Most** Reliable Undercounter With Pumped Drain & Tank Heat.*

ET Series



Pumped Drain

**Allows installation
in almost all
applications.**

Screens

**Dual screening protects
both wash & drain
pumps from debris.**

Sustained Heat

**Maintains tank
temperature
rack after rack.**



Little Powerhouse

**Only 34 1/2" Tall with a
14" Door Opening, while
Washing & Rinsing with
1 1/2 HP.**

Perfect for Restaurants, Bars, and Fast Food Operations.

At American Dish Service, Quality People,
Designs, and Products have been the foundations
of our organization for over *45 years*.

www.americandish.com

ADs
American Dish Service
Manufacturers of Ware Washing Equipment

Toll Free

Phone

Fax

900 Blake Street Edwardsville, KS 66111-3820 (800) 922-2178 (913) 422-3700 (913) 422-6630

Effective 4/2016

C American Dish Service 4/2016

ET Series

MULTI-USE UNDERCOUNTER DISHWASHERS

ET... The Dishmachine of choice, when space is a concern. You will NEVER AGAIN have to sacrifice production or results.

- 1 1/2 HP Wash & Rinse Pump
- 90 Second, 2 Minute, and 2 1/2 Minute Time Cycles
- Reliable Tank Heat (Sustained)
- 14" Door Opening
- Automatic Chemical Dispensing
- Optional Chemical Alarms
- Pump Drains Water (up to 20")
- Dual Screening Catches Debris



Operating a free standing complete warewashing center in only 48" of space. Just combine our ET-AF Undercounter with our stainless steel table package.




CAUTION:

Electrical and plumbing connections must be made by a qualified Service Person who will comply with all available federal, state, and local Health, Electrical, Plumbing, and Safety codes.


*Manufacturer reserves the right to modify these specifications in compliance with regulatory agencies and manufacturing expediency.

NOTE:

All dimensions listed have a tolerance of + or - 1/8" unless otherwise noted.



TOP VIEW

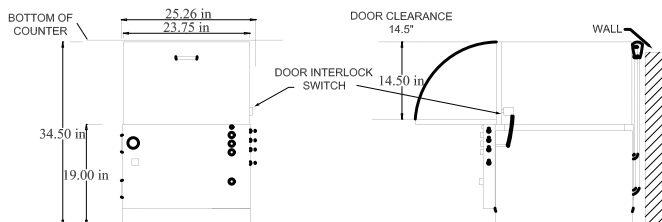

FRONT VIEW

SIDE VIEW

Effective: 4/2016

Skirted ET Pumped Drain and Heat

ET-AF

FAMILY MODELS

	ET-AF	ET-A	ET-AH
NSF RATED CAPACITY	30	24	20
WASH TIME(Sec.)	45	60	75
RINSE TIME(Sec.)	30	45	60
DWELL (Sec.)	15	15	15
TOTAL CYCLE TIME (Sec.)	90	120	150

WATER TEMPERATURE-SUPPLY WATER

(NSF) 120 F MIN.
49 C MIN.

WATER CONSUMPTION (NSF RATED)

1.7 Gal's Per Cycle
6.4 Lit's Per Cycle

MOTOR RATING (PUMP)

1.5 HP

DRAIN MOTOR RATING

1.125 KW

SUSTAINER HEATER

1/20 HP

ELECTRICAL RATINGS (NEC)

.037 KW
1/2 KW
15 VAC, 20 Amp BRKR
50/60 Hz, 1 Phase

Connect to Supply Source using 10-12 AWG Copper Wires using Non-Time Delay Fuse of 20 Amp rating or 20 Amp Circuit Breaker.

RACK SIZE

19.75" x 19.75"
50.2 cm x 50.2 cm

DOOR CLEARANCE

14.5" x 22.25"
27.9 cm x 56.5 cm

WATER INLET

1/2" FPT

DRAIN SIZE

3/4" I.D. Hose by 60" Lg.

PUMP-OUT HEIGHT (Maximum)

20"

MACHINE HEIGHT

Min 33.5"- Max 34.5"

WIDTH (Overall)

85.1 to 87.6 cm

DEPTH (Overall)

25.5"
64.8 cm

SHIPPING WEIGHT

29.0"
73.6 cm

SHIPPING

300 lb.
136.1 kg
36"L x 36"W x 42"H
91.4 x 91.4 x 106.7 cm

Copyright: 4/2016

ADS has built a strong history based on Customer Service, Quality, and Reliability. A Commitment to Excellence is the driving force behind American Dish Service.

Toll Free

Phone

Fax

900 Blake Street Edwardsville, KS 66111-3820 (800) 922-2178 (913) 422-3700 (913) 422-6630

WWW.AMERICANDISH.COM