

FlexiTop

Mobile hot and frost combination serving counters

Models	Single Tier	Dual Tier
	<ul style="list-style-type: none"> • KFTS-36-NUP UNIT,36.00 LG • KFTS-50-NUP UNIT,50.00 LG • KFTS-60-NUP UNIT,60.00 LG • KFTS-64-NUP UNIT,64.00 LG 	<ul style="list-style-type: none"> • KFTS2-36-NUP UNIT,36.00 LG • KFTS2-50-NUP UNIT,50.00 LG • KFTS2-60-NUP UNIT,60.00 LG • KFTS2-64-NUP UNIT,64.00 LG



Standard Features

- Designed to run hot or cold
 - Hot - min temp 100° (100°-180° F)
 - Cold - 0° - 20° F
- Aluminum surface top
- 1/2" drain
- Stainless steel top
- One piece, molded fiberglass pylon (base), fully rounded corners, permanent color
- Cord and plug supplied standard
- High density environmentally friendly, Kyoto Protocol compliant, Non ODP (Ozone Depletion Potential) polyurethane foam throughout
- Environmentally friendly R290 GreenGenius refrigerant
- 3 position rocker switch for hot, off and cold operations
- 2 year parts and labor warranty standard

Options & Accessories

- Tempered glass sneeze guard
 - customer or operator side
- Stainless steel overshef

Specifications




Top: Exterior top is constructed of 14-gauge stainless steel, welded, ground and polished into one integral unit. Top is fabricated with square exterior corners.

Interior: Hot/cold top surface is constructed of aluminum, thermally isolated from a full perimeter S/S drain trough. Heaters and refrigeration lines are secured to the bottom side of the aluminum top to insure even distribution of frost and heat. A galvanized outer body is utilized to retain high-density, environmentally friendly, Kyoto Protocol Compliant, Non ODP (Ozone Depletion Potential), Now GWP (Global Warming Potential) closed-cell polyurethane insulating foam.


Exterior body: is seamless, one-piece molded fiberglass, having perfectly smooth exterior surface with all corners fully rounded. The fiberglass is molded with permanent color. Stress points are internally reinforced.

Casters: unit is mounted on 5" (13cm) diameter swivel casters with non-marking polyurethane casters and pate brakes. Overall height of caster assembly is 6" (15cm)






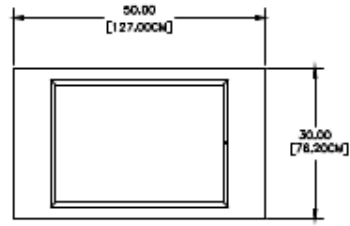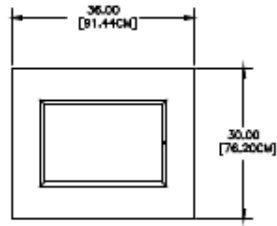


KFTS-36-NUP

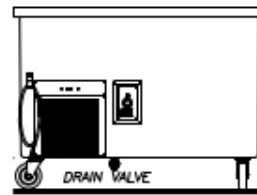

KFTS-50-NUP

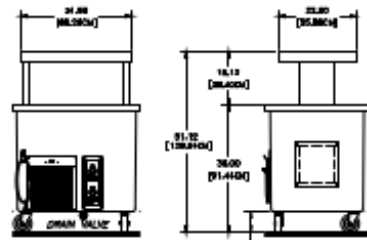




KFTS2-36-NUP

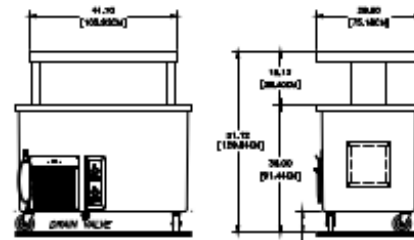


KFTS2-50-NUP


Welbilt reserves the right to make changes to the design or specifications without prior notice.

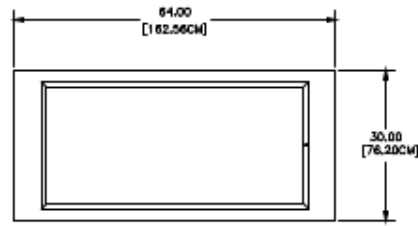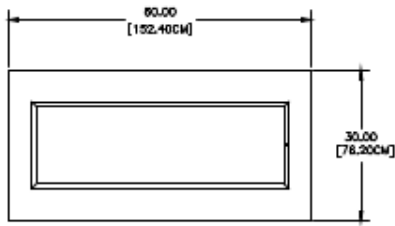




KFTS-60-NUP





KFTS-64-NUP




TYPICAL
END VIEW



KFTS2-60-NUP



KFTS2-64-NUP



Specifications								
Model		18 x 26 Sheet pan capacity (recessed 3/4")	V/HZ/Ph	Amps	H.P	Nema Plug	BTU Load	System Capacity
KFTS-36-NUP	KFTS-36-NUP UNIT,36.00 LG	1	115/60/1	2.4	1/5	5-15P	440	616
KFTS-50-NUP	KFTS-50-NUP UNIT,50.00 LG	2	115/60/1	4	1/5	5-15P	644	735
KFTS-60-NUP	KFTS-60-NUP UNIT,60.00 LG	2	115/60/1	4	1/5	5-15P	802	790
KFTS-64-NUP	KFTS-64-NUP UNIT,64.00 LG	3	115/60/1	6	1/5	5-15P	836	790
KFTS2-36-NUP	KFTS2-36-NUP UNIT,36.00 LG	2	115/60/1	4	1/5	5-15P	594	773
KFTS2-50-NUP	KFTS2-50-NUP UNIT,50.00 LG	4	115/60/1	8	1/4	5-15P	882	887
KFTS2-60-NUP	KFTS2-60-NUP UNIT,60.00 LG	4	115/60/1	8	1/4	5-15P	1412	1311
KFTS2-64-NUP	KFTS2-64-NUP UNIT,64.00 LG	6	115/60/1	12	1/4	5-15P	1471	1324

Welbilt reserves the right to make changes to the design or specifications without prior notice.