Worktop Refrierators & Freezers FWR Series



| FWR-27-N | FWR-36-N | FWR-48-N | FWR-60-N | FWR-72-N |
|----------|----------|----------|----------|----------|
| FWF-27-N | | FWF-48-N | FWF-60-N | |

Item # _____

Standard Features

- Our "Next Generation" worktop units have been completely re-designed to ensure proper temperature even in 100 °F environments.
- Exclusive base design for over 30% greater interior capacity than most in it's class.
- All stainless steel interior and exterior construction for a clean & safe food environment. Coved corner floor to meet NSF requirements.
- · Heavy duty stainless steel door with full length recessed door handles; interior step design for added insulation and protection of door gasket.
- With innovative and eco-friendly technology, Fagor utilizes R-290 Hydrocarbon designed to meet DOE's Energy Conservation standards with very low contribution to global warming (ODP-0) (GWP-3).
- Front breathing refrigeration system for built-in applications.
- 36" high working height with a 4" fixed backsplash / 3" casters (opt.) for 34" high applications.

Options & Accessories

- Epoxy coated shevles with clips
- 3" casters (set of 4, front 2 w/ brakes)
- Single & Double tier overshelf
- 220 Voltss / 50 cycles / 1 phase



*Conforms to UL & NSF-7 standards







FWR(F)-48-N



FWR-72-N

| Model | Doors | Shelves | Capacity Cu. Ft. | Amps | HP | Volts | Cabinet Dimensions W/D/H | | ons | Shipping (Wt. Cubes) | | | |
|------------------------------------|---------------------------|------------------------|---------------------|------|------|-------|-----------------------------|---------|---------|-------------------------|----|--|--|
| Worktop Refrigerators | | | | | | | | | | | | | |
| FWR-27-N | 1 | 2 | 9.5 | 1.5 | 1/10 | 115 | 27-3/4" | 29-3/8" | 39-5/8" | 190 | 21 | | |
| FWR-36-N | 2 | 2 | 13.1 | 1.5 | 1/10 | 115 | 36-3/8" | 29-3/8" | 39-5/8" | 258 | 33 | | |
| FWR-48-N FWR-60-N FWR-72-N | 2 | 4 | 16.7 | 2.5 | 1/3 | 115 | 48-3/8" | 29-3/8" | 39-5/8" | 270 | 35 | | |
| FWR-60-N | 2 | 4 | 20.6 | 2.5 | 1/3 | 115 | 60-3/8" | 29-3/8" | 39-5/8" | 320 | 47 | | |
| FWR-72-N | 3 | 6 | 25.4 | 2.5 | 1/3 | 115 | 72-1/2" | 29-3/8" | 39-5/8" | 385 | 56 | | |
| Worktop Freezers | | | | | | | | | | | | | |
| FWF-27-N | 1 | 2 | 9.5 | 2.7 | 1/3 | 115 | 27-3/4" | 29-3/8" | 39-5/8" | 195 | 21 | | |
| FWF-48-N | 2 | 4 | 13.1 | 6.5 | 1/2 | 115 | 48-3/8" | 29-3/8" | 39-5/8" | 275 | 35 | | |
| FWF-60-N | 2 | 4 | 16.7 | 6.5 | 1/2 | 115 | 60-3/8" | 29-3/8" | 39-5/8" | 325 | 47 | | |
| * Depth does not include 1" humper | ** Height does not includ | 5" casters (6" overall | or 6" optional leas | | | | | | | | | | |

not include 1" bumper. ** Height does not include 5" casters (6" overall) or 6" optional legs

13105 NW 47th Ave. Opa-Locka FL 33054 Tolfree: (866) 463 2467 Ph: (305) 779 0170 Fax: (305) 779 0173 info@fagorcommercial.com www.fagorcommercial.com

Worktop Refrierators & Freezers FWR Series



Construction

Heavy duty stainless steel exterior top, 4" backsplash, front and sides. Galvanized back panel. Interior completely constructed of heavy duty stainless steel with coved corner floor.

Doors: heavy duty stainless steel exterior and interior, in-step design with hinged solid doors and positive seal. Self closing mechanism and 120° stay open feature. Door openings have a plastic breaker strips to retard condensate formation. Provided with magnetic door gaskets, removable without tools. Recessed full length handles. Units come complete with a 2" Ecomate CFC.Free polyurethane insulation, foamed in place.

Specifications

Refrigeration System

Self-contained capillary tube system using environmentally friendly (CFC Free) R-290 refrigerant. Front breathing for built-in applications. Evaporator coil is mounted to interior top panel encased in stainless steel. Large fan motor and fan blades for better air flow.

Refrigerators are designed to maintain temperatures between 33° to 38 °F and freezers 0° to -5 °F during normal operations. Digital controllers and thermostats on freezers, analog thermostats on refrigerators.

Shelving


(2) Epoxy coated shelving per door with clips. Adjustable in-1/2" increments per shelf.

Others

Unit is supplied standard with an 8' cord and plug (Nema 5-15p). Standard 5" diameter casters, front 2 with brakes.

Warranty

3 year parts and labor warranty plus 2 additional year compressor warranty. (Continental U.S.A. & Canada only).

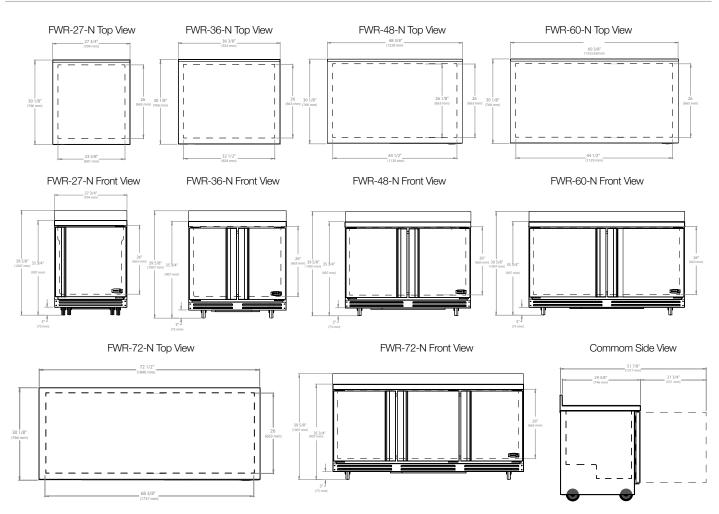

The manufacturer reserves the rights to modify materials and specifications without notice.

- 13105 NW 47th Ave. Opa-Locka FL 33054 Tollfree: (866) 463 2467 Ph: (305) 779 0170 Fax: (305) 779 0173
- IULY info@fagorcommercial.com
- www.fagorcommercial.com