



# GIA (CURVED GLASS)

# Gelato Showcase

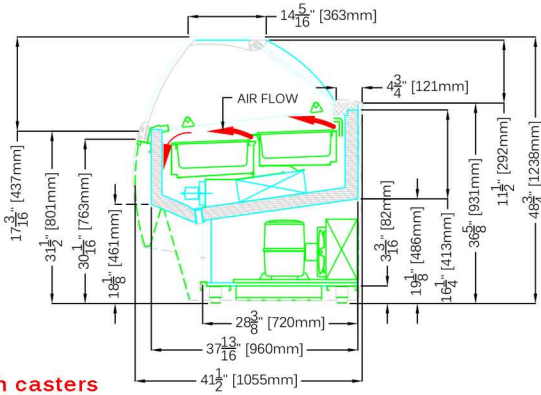

**Note: with casters**  
**Casters height: 4 3/8" H**  
**Overall height: 49 7/8" H**

**OPTIONAL:  
 SHOWN WITH  
 POPSICLE TRAYS**



## STANDARD FEATURES

- Diffused LED light 3000°K
- Front and side heated glasses
- Double air flow refrigeration system
- Reverse cycle defrost system
- Hermetic compressor
- Plexiglass sliding doors closure
- Cases ship standard unfinished

## OPTIONS

- Dual temperature switch (-18°C/+5°C) (-0.4°F/+41°F)
- S/s display trays for cakes
- Remote condensing unit
- Self rolling night curtain
- Dipper well
- Cone holder
- Casters
- Popsicle display tray (stainless steel & plastic. Plastic available in color options (see images above))



GIA CURVED GLASS - GELATO					
TECHNICAL FEATURES		MODELS			
		GIA C G1150	GIA C G1700	GIA C G2106	GIA C G2106 Dual Temp
External Dimensions (L-D-H)	Inches	*45 1/4" - 41 1/2" - 48 3/4"	*64 15/16" - 41 1/2" - 48 3/4"	*84 5/8" - 41 1/2" - 48 3/4"	*84 5/8" - 41 1/2" - 48 3/4"
	Inches-MM	*1150 - 1055 - 1238	*1650 - 1055 - 1238	*2150 - 1055 - 1238	*2150 - 1055 - 1238
Crated Dimensions (L-D-H)	Inches	52" - 48" - 54"	72" - 48" - 54"	91" - 48" - 54"	91" - 48" - 54"
	Inches-MM	1320 - 1219 - 1371	1828 - 1219 - 1371	2311 - 1219 - 1371	2311 - 1219 - 1371
5 Liter Pan Capacity**	Pan	12	18	24	24 (12 + 12)
14 3/16" x 6 1/2" x 4 3/4"	Configuration				
(360mm x 165mm x 120mm)					
8 Liter Pan Capacity**	Pan	8	12	16	16 (8 + 8)
14 3/16" x 9 13/16" x 3 1/8"	Configuration				
(360mm x 250mm x 120mm)					
12 Liter Pan Capacity**	Pan	8	12	16	16 (8 + 8)
14 3/16" x 9 13/16" x 6"	Configuration				
(360mm x 250mm x 150mm)					
Refrigeration	Type	Fan Ventilated	Ventilated	Ventilated	Ventilated
Refrigeration Display Area	Type	Deck	Deck	Deck	Deck
Operating Temperature	°C / °F	-18°C / -0.4°F	-18°C / -0.4°F	-18°C / -0.4°F	-18°C / -0.4°F
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	2 / Hermetic	2 / Hermetic
BTU's @ -25°F Evap Temperature	BTU's	5440 BTU'S	7040 BTU'S	8640 BTU'S	10,880 BTU'S
		230/1/50 (EU)	230/1/50 (EU)	230/1/50 (EU)	230/1/50 (EU)
Electric Supply	(V/Ph/Hz)	208-220/1/60 (USA)	208-220/1/60 (USA)	208-220/1/60 (USA)	208-220/1/60 (USA)
Power Consumption	(W/A)	1700W / 9A	2200W / 11.5A	2700W / 14A	3000W / 15A
Defrost	Mode/Type	Reverse Cycle	Reverse Cycle	Reverse Cycle	Reverse Cycle
Climatic Class	N°/°C/°F/H.R.	4+/35/95/70%	4+/35/95/70%	4+/35/95/70%	4+/35/95/70%
Refrigerant Gas	Type	R404A	R404A	R404A	R404A
Net Weights	Kg/Lb	210Kgs / 462Lbs	278Kgs / 612Lbs	320Kgs / 705Lbs	340Kgs / 749Lbs
Crated Weights	Kg/Lb	305Kgs / 672Lbs	408Kgs / 899Lbs	480Kgs / 1058Lbs	500Kgs / 1102Lbs

\* DIMENSIONS ARE WITHOUT SIDE PANELS \*\* PANS NOT INCLUDED NOTE: 6 FOOT CORD SUPPLIED REQUIRES 208-230V NEMA L14-20P HARD WIRE OPTION



361-367 Beach Road, Burlingame, CA 94010  
 Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400  
 sales@oscartek.com | www.oscartek.com

