REACH-IN FREEZER (0°F)

Model: 2FSN

Natural Refrigerant R-290 Model

2-Section Reach-In Freezer Shallow Depth

2FSN - Stainless steel front, aluminum end panels and interior

2FSNSA - Stainless steel exterior, aluminum interior

2FSNSS - Stainless steel exterior and interior




Options and Accessories

(upcharge and lead times may apply)

| Stainless steel case back | Hinged glass door (consult factory) |
|---------------------------------------|---|
| Additional epoxy coated steel shelves | Special electrical req. (consult factory) |
| Chrome or stainless steel shelves | Rehinging of doors (consult factory) |
| Heavy duty pilaster strips | Correctional Facility Options |
| Adjustable legs | One way security screws |
| Custom laminates | Locking hasp (lock not included) |
| Half doors | Stainless steel mesh cover |
| Pass-Thru (consult factory) | Coverless hinges |
| Standard depth (consult factory) | |
| | · |

Consult factory for other model configurations, options and accessories.



Standard Model Features

REFRIGERATION SYSTEM

Self contained, performance rated refrigeration system

Natural, environmentally safe, high efficiency R-290 refrigerant¹

Automatic, electric condensate evaporator

Expansion valve system

Standard operating temperature is 0 to -5°F and can be adjusted to operate as low as -10°F in a 90°F ambient.

CABINET ARCHITECTURE

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Self-closing doors

Mangetic snap in Santoprene® door gaskets

Cylinder lock in each door

Heavy duty, epoxy coated steel shelves

5" casters

MODEL FEATURES

LED interior lighting

Electronic controller with digital display & hi-low alarm

Automatic electric defrost

¹ R-290 refrigerant meets all federal and state regulatory requirements.



Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

APPROVAL:

Model Specifications

| DIMENSIONAL DATA | |
|---|------------------|
| Net Capacity (cubic feet) | 32 (906 cu I) |
| Width, Overall (inches) | 52 (1321 mm) |
| Depth, Overall (inches) (including handles) | 29 ½ (743 mm) |
| Depth (inches) (less doors) | 25 % (657 mm) |
| Depth (inches) (doors open 90°) | 49 ½ (1257 mm) |
| Clear Door Width (inches) | 19 3/8 (492 mm) |
| Clear Door Height (inches) | 58 5/8 (1489 mm) |
| Height, Overall (inches) (including 5" casters) | 82 ½ (2089 mm) |
| Number of Doors | 2 |
| Number of Shelves | 6 |
| Shelf Area (square feet) | 40.8 (3.8 sq m) |

REFRIGERANT DATA

| Condensing Unit Size (H.P.) | $\frac{1}{2}$ |
|-----------------------------|---------------|
| Capacity (BTU per hour)* | 2470 |

^{*} Rating @ -15°F evaporator, 90°F ambient

ELECTRICAL DATA

| Voltage (International) | 115/60/1 (220/50/1) |
|---|---------------------|
| Feed Wires (including ground) | 3 |
| Total Amps (International) | 8.9 (4.1) |
| Defrost Amps (International) | 6.1 (3.2) |
| 10 ft. Cord/Plug [attached] (International) | Yes (No) |

SHIPPING DATA

| 85 ½ (2172 mm) |
|-----------------|
| 64 (1626 mm) |
| 42 (1067 mm) |
| 133 (3766 cu l) |
| 555 (252 kg) |
| 635 (288 kg) |
| |

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



Equipped with one NEMA-5-15P Plug (varies by country)

Continental® Refrigerator

Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

Model Plan Views

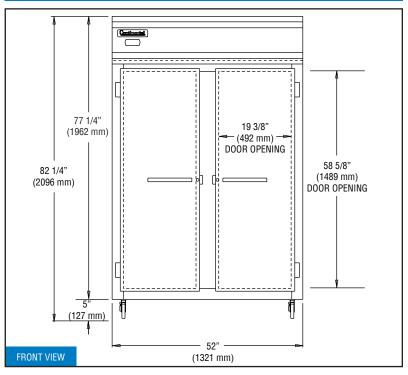

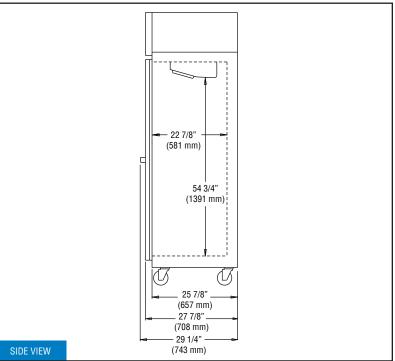

IMPORTANT NOTE: If the cabinet is located directly against a wall and/or under a low ceiling, a <u>minimum</u> clearance of 12" is required on top and 3" on sides and rear.