	PROJEC	DT:
ITEM #	ITEM # .	

```
____ QTY: _
```

```
MODEL # __
AIA # _
```

SOLID DOOR REACH-IN REFRIGERATOR

CABINET CONSTRUCTION

20 Gauge Stainless Steel Door

Low Profile Vertical Door Handles

Energy Saving Thermal Breaker Stainless Steel Breaker Caps 9 Silver Freeze Wire Shelves

• 6" High Adjustable Stainless Steel Legs • 8' Cord And Plug (see electrical data for details)

Variable Speed Compressor Technology

Expansion Valve Technology Manager's Lockout Feature Anti-Condensate Perimeter Heater

REFRIGERATION

Environmental Concerns · Hot Gas Condensate Evaporator

Consistent Product Temperatures

Full Electronic Control With Touchpoint Interface

Heavy-Duty Cylinder Locks Stainless Steel Interior Door Liner

Stay-Open Door Feature For Easy Product Loading

One Piece, Snap-In Magnetic Door Gaskets

Stainless Steel Exterior

Aluminum Interior

Hinged Front Shroud

FEATURES

38°F

.

SIS

RSA-3D-S1-HC

- **EXCLUSIVE WARRANTY**
- **6 Year Parts & Labor Warranty**
- 7 Year Compressor Warranty
- Exclusive 2 Year Warranty On Magnetic Door Gaskets
- Lifetime Warranty On Handles & Hinges (parts only)





OPTIONS & ACCESSORIES

- Secure-Temp[™] Technology
- Stainless Steel Case Back
- Stainless Steel Kick Plate
- Exterior Door Laminate
- 3779 Champion Blvd, Winston-Salem, NC 27105 ph: (888) 845-9800 fax: (800) 253-5168

Sales@VictoryRefrigeration.com VictoryRefrigeration.com

Additional Shelves

- Heat Shield (left, right)
- Tray Slides (type A & A/C)
- 3", 6" Casters Or 6" Seismic Legs

Door Swing Orientation (at time of order)
 FlexTemp Models Maintain Between 28°F And 38°F

- Correctional Package
- Remote Models* (6" legs only) (refrigerant must be specified at time of order, see note)

___ DATE: ____


Adaptive Defrost For Reduced Energy Consumption And More

Epoxy Coated Evaporator Coil, Located Out Of The Food Zone



APPROVAL: _____

ULTRASPEC SOLID DOOR REACH-IN REFRIGERATOR RSA-3D-S1-HC

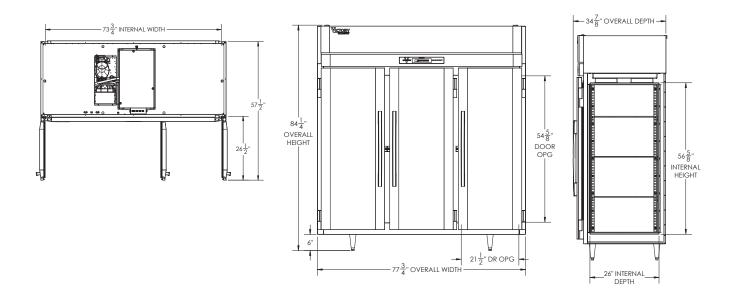

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Dimensional tolerances +/- 1/4". Metric dimensions (MM)

12" Top and 3" rear clearance is required

CHARACTERISTICS ELECTRICAL DATA			SHIPPING DETAILS		
Net Capacity (cubic ft.)	68.34	Cabinet Voltage**	115/60/1	Height	86″
Width, Overall (in.)	77 3/4″	Total Amperes	8.5	Width	87″
Depth, Overall (with handle)	34 7/8″	NEMA Plug (8' cord)	5-15P	Depth	45″
Height Overall (6" legs)	84 1/4"	REFRIGERATION DATA		Crated Weight	774 lbs
Depth, Door Open 90°	57 1/2″	Condensing Unit Size, HP	3/4	*NOTE: Remote units are field wired and come with 6" legs. Refrigerant must be specified at	
Door Opening (in.)	21 1/2" x 54 5/8"	Refrigerant	R-290		
No. Of Doors/Shelves	3/9	Capacity (BTU/HR) (100°F/20°F)	4950		
		Heat Rejection (BTU/HR)	7425	time of order.	
		Charge (lbs/grams)	0.2866/130		

** NOTE: This unit utilizes variable speed compressor technology. The compressor can experience nuisance tripping on Class A GFCI outlets which have a trip limit of 4 mA to 6 mA. To avoid this issue in a location that requires GFCI circuit protection, Victory recommends using a HUBBELL Model Number GFRST83W 20A Heavy Duty Hospital Grade Self-Test GFCI Receptacle.

3779 Champion Blvd, Winston-Salem, NC 27105 | ph: (888) 845-9800 | fax: (800) 253-5168

Sales@VictoryRefrigeration.com VictoryRefrigeration.com

Rev. 9/1/23 Printed in U.S.A.

an Ali Group Company

