


RAFFAELLO 350 EVO TOP - 14"

Heavy-duty Deli / Supermarket slicer

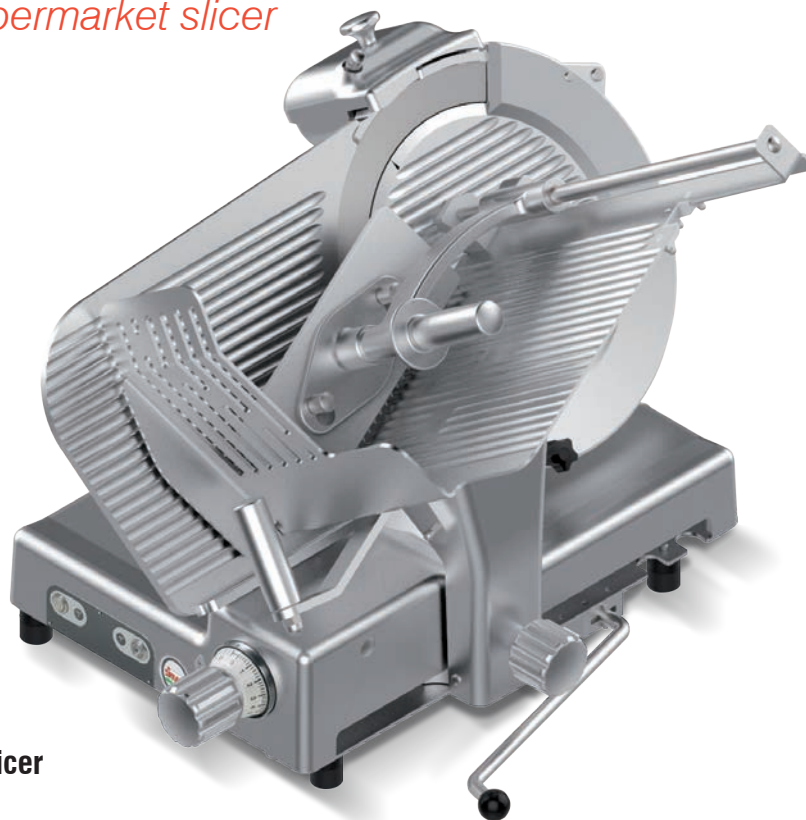

The EVOLution continues with Raffaello 350 EVO TOP
14" full-size capacity, heavy duty slicer designed for high-volume retail applications, setting the highest standards in the industry for:

Dependability, Yield and Profitability

- One-piece sanitary polished and anodized aluminum construction
- Longest carriage travel for the widest cut capacity
- Low-profile, ergonomic design with an extremely smooth carriage motion
- ½ Hp heavy-duty motor for continuous service and higher torque for cheese slicing
- Stainless steel controls, IP67 dustproof and waterproof rating
- Dual stage cam system allows precise, thin and thick slicing
- Complete stainless steel drive shaft assembly
- Built-in sharpener for perfect results and safety - unlike remote devices
- Waterproof from above

Operation: Gravity feed.
Construction: Polished, anodized aluminum alloy.
Knife: One piece, chromium plated 100Cr6 forged carbon steel blade.
Sharpener: Built-in, removable, two stone dual action.

Optional

- 19705020 Vegetable Chute
- 19510453R Fence, rectangular/round products

Hygiene and Safety

- All metal knobs, handles and dials, minimized use of plastic
- Rounded, edgeless design
- Increased gap between blade and machine body
- One-piece carriage with seamless, see-through hand guard
- Improved blade guard removal system
- Zero blade exposure to prevent injuries when cleaning
- Tilt-carriage with zero blade exposure
- Permanent blade rim guard covering the non-slicing portion of the blade edge
- Lift lever to easily and safely clean under the slicer (factory installed option)
- Overload protection
- No volt release
- Certified to and exceeding the NSF ANSI 8 2010 standard
- SM Package: Automatic turn-off + Thickness dial at zero turn-off + Start at zero

Slice thickness: 0-1" (0-24 mm), infinitely variable
Motor: 0.55 Hp (410 W), fan cooled.
Electrical: 120V AC, 60Hz, 3.4A.
Plug & Cord: Attached, flexible, 3 wire SJT AWG 16, 6'4" long. NEMA 5-15 P
Controls: ON/OFF stainless steel keypad, IP 67 waterproof protection. No voltage release.



Certified to UL Standard 763
and NSF Standard 08
Certified to CSA Standard C22.2



Improved blade guard removal system



Completely sealed stainless steel shaft



NSF ANSI 8 design




One-piece carriage with seamless,
see-through hand guard



Increased gap between blade
and machine body



Dual stage cam system allows precise,
thin and thick slicing

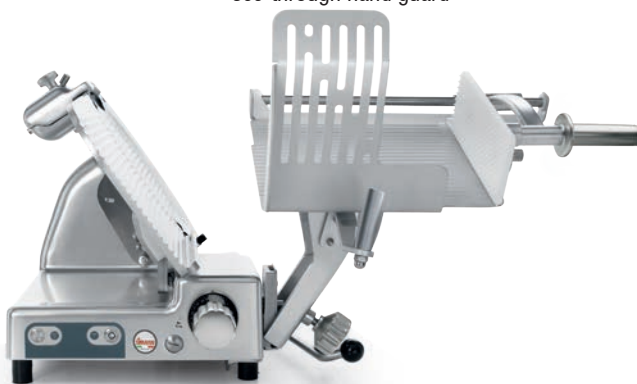




Tilt-carriage with zero blade exposure



Lift lever



Vegetable Chute option

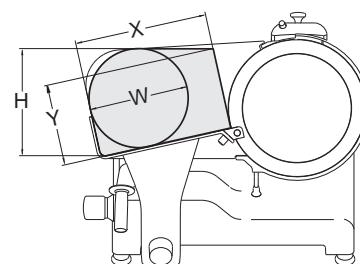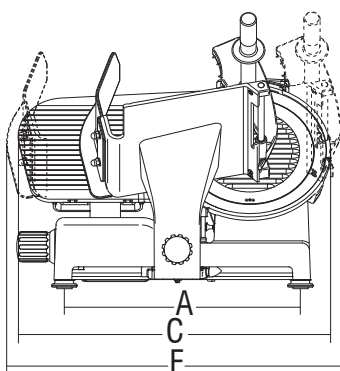

	Ø Blade	Motor	Cut thickness	Blade rpm	Carriage stroke	Hopper	A	B	C	D	E	F	G	X	Y	H	W	Net weight	Shipping	Gross weight
	mm/inch	watt/Hp	inch.	rpm	inch.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	inch.	lbs.	inch.	lbs.
Raffaello 350 EVO TOP	350/14"	410-0.55	1"	319	14"	13 ³ / ₄ " x 11 ¹ / ₄ "	20 ³ / ₁₆ "	13 ³ / ₈ "	28 ¹ / ₈ "	25 ³ / ₁₆ "	25"	N/A	27 ³ / ₁₆ "	12"	7"	10 ⁵ / ₈ "	9 ⁵ / ₈ "	106	33" x 34" x 33"	155