



TEST OUR METAL®

# Insulated Mobile Heated Cabinet

For 18" X 26" or 14" X 18" Trays, and 12" X 20" Pans

- Double Wall Construction with reinforcement channels welded between corner posts for added support and rigidity.
- Fully insulated top, sides and door for energy efficiency and heat retention.
- 20 gauge aluminum exterior for durability and cleanability.
- Aluminum Interior for even heat retention and energy efficiency.
- Heavy Duty Frame and interlocking side panels of 6063-T5 architectural aluminum for air tight seal and structural rigidity.
- Doors open 270 degrees, are equipped with center reinforcement and heavy duty flag hinges. Comes standard with built in flush mounted door handle and thermometer.
- Designed to hold 18" X 26" or 14" X 18" Trays or 12" X 20" hotel pans with variable spacing on 3 1/8" centers. The ladder frame and tray slides are easily removable for cleaning.
- SecoSelect® 1500 watt Stainless Steel heating unit is removable from the front.

Job: \_\_\_\_\_

Item No. \_\_\_\_\_

## Model


- VCHI-30-RFM



Made in USA



MODEL #	TRAY CAPACITY		PAN CAPACITY 12X20	HEIGHT DIM A	WIDTH DIM B	DEPTH DIM C	VOLTAGE	SHIPPING CUBE FEET	SHIP WEIGHT
	18X26	14X18							
VCHI-30-RFM	7	14	14	30 3/8"	27 5/8"	30 3/4"	120	25	150

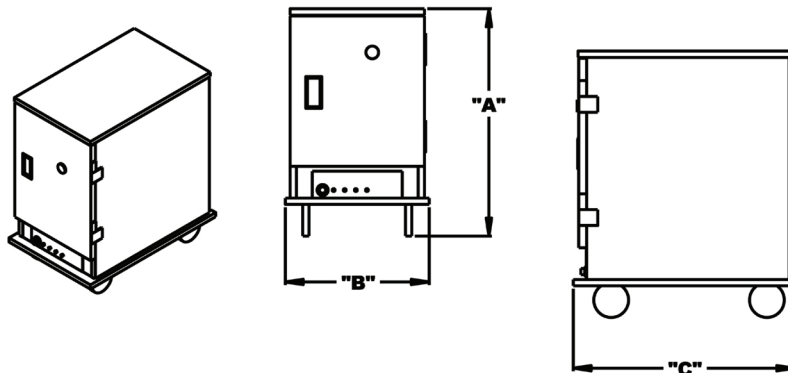

**GENERAL:** Cabinet shall be constructed with a aluminum exterior and interior. All double wall construction insulated with high density fiberglass insulation. All exterior surfaces shall be ground and polished to a #3 finish.

**INTERNAL FRAME:** Cabinet shall be framed with 1 1/2" x 1 1/2" x 1/8" thick 6063-T5 aluminum tubing in the front and back. Frame shall be fully welded.

**BASE:** Base shall be .100 Aluminum and shall be reinforced with 1/8" thick aluminum cross braces. Base shall come standard with non-marking perimeter bumper.

**INNER CABINET:** Inner cabinet shall be all aluminum construction. Cabinet shall be insulated with high density fiberglass. 1" on sides, top and bottom, 1/4" on the back. Cabinet slides shall be constructed using 1/8" thick aluminum extrusions. Cabinet shall come standard with 7 sets of slides which shall be adjustable and removable. Cabinet shall accommodate 18" x 26" sheet pans and 12" x 20" hotel pans.

**DOOR:** Door exterior and interior will be 20 gauge aluminum, and shall be insulated. Door shall have two (2) heavy-duty, 5/8" thick extruded flag type hinges. Door shall be removable without tools and shall have recessed handles. Door shall have a heavy-duty positive action magnetic latch.

**ELECTRICAL CHARACTERISTICS:** Cabinet shall have a bottom mounted 1500 watt heating unit with front control panel consisting of: on and off switch, power indicator lights, and thermostat control. Heating unit shall be removable from the front. Cabinet shall be 120 volt, 60 cycles, 1 phase. Cabinet shall come with a cord and a Nema #5-15 plug.

**CASTERS:** Cabinet shall come complete with 4-2" non-marking plate casters, 2 rigid and 2 swivel. Casters shall have a weight capacity of 200 lbs each.

### Accessories, Options, Variations

- Top Perimeter Bumper
- Transport Locks
- Door Gaskets
- Left Hand Door (no additional charge)
- PTS – Pass Through
- Perimeter bumper guard

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacement for previously purchased equipment.



451 E. County Line Rd. • P.O. Box 1089 • Mooresville, IN 46158  
 800-733-8073 • Local 317-831-7030 • Fax 317-831-7036  
[www.secoselect.com](http://www.secoselect.com)

REV 2017-05