



TEST OUR METAL®

Job: \_\_\_\_\_

Item No. \_\_\_\_\_

## Mobile Banquet Service Cart

Heavy Duty banquet service cabinets for pre-plated foods designed to meet the rugged use of commercial food service operations.

Electric and canned fuel heated.


- Stainless steel interior and exterior
- Fully insulated for energy efficiency
- Cabinet is welded steel frame all vertical and horizontal edges for structural integrity
- Caster mounting plates 5/16" steel plate drilled and tapped welded to cabinet frame
- All hardware mounted through framing
- Top mounted electronic control with digital display for temperature at a glance
- 60 to 230 degree temperature range
- Armor Heat™ system
- Heavy duty 5" casters standard
- Electric and canned fuel operation, standard
- Canned heat has its own drawer, no open flames in interior
- Doors have 3 hinges standard
- 18 gauge stainless steel removable perforated shelves, standard
- Inner cabinet has 18 gauge stainless steel full perimeter shelf brackets welded in place
- Four chrome plated handles, 2 per end

### Models

- BQ60
- BQ80
- BQ120
- BQ150
- BQ200




**BQ150 shown**



Made in USA

451 E. County Line Rd. • P.O. Box 1089 • Mooresville, IN 46158  
Toll Free 800-733-8073 • Local 317-831-7030 • Fax 317-831-7036  
[www.secoselect.com](http://www.secoselect.com)

MODEL #	CAPACITY		WIDTH DIM A	DEPTH DIM B	HEIGHT DIM C	VOLTAGE	WATTAGE	AMPERAGE	SHIP WEIGHT
	# of carriers	# of plates							
BQ60	6	60	29 1/4"	41"	48 9/16"	120	750	6.25	450
BQ80	8	80	56"	33"	51 9/16"	120	1980	16.5	600
BQ120	12	120	56"	33"	66 1/16"	120	1980	16.5	650
BQ150	15	150	67 5/8"	33"	66 1/16"	120	1980	16.5	750
BQ200	20	200	67 5/8"	33"	79 1/16"	120	1980	16.5	750

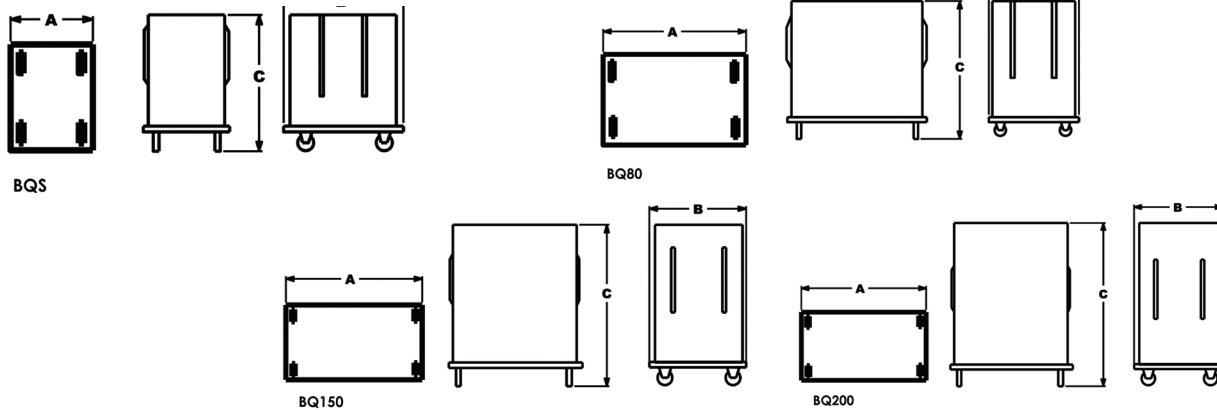

**GENERAL:** Cabinet constructed throughout with stainless steel. All double wall construction, insulated with high density fiberglass insulation. All exterior surfaces shall be ground and polished to a #3 finish.

**INTERNAL FRAME:** All vertical and horizontal edges framed with 1/8" angle steel, arc welded, cross braced and reinforced at all corners. Welded steel framing is powder coated.

**BASE FRAME:** Base shall be 1/8" powder coated steel with formed edges. Base shall have 4 - 6" x 6" and 5/16" steel plates drilled and tapped to accommodate 5", 6" and 8" casters. These plates are fully welded on three sides 6" to framing.

**INNER CABINET:** Inner cabinet shall be all 24 gauge 300 series stainless steel. Inner cabinet shall have 20 gauge stainless steel perforated removable shelves. These shelves are held in place by a full perimeter 20 gauge stainless steel offset bracket. This bracket is welded to interior, and has mitered corners heli-arc welded together. This inner cabinet shall be heated by the Armor Heat™ system. Canned fuel drawer not exposed to interior of cabinet.

**DOORS:** Door shall be all 20 gauge stainless steel. Door shall have full interior frame constructed of 16 gauge galvanized steel angle. Door shall be fully insulated and gasketed. Doors shall have an exterior louver with an interior damper for moisture control. All door hardware shall be secured through framing in cabinet and door. Door shall have a heavy-duty positive and magnetic door latch and 3 refrigeration type door hinges.

**ELECTRICAL CHARACTERISTICS:** Cabinets shall have a top mounted control panels consisting of an on and off switch with power indicator light. Electronic controller with digital temperature display. Each cabinet shall be heated by a 120 volt 60 cycle 1 phase heating system. Cabinets shall come complete with a permanently mounted 8' cord with a Nema #5-20P plug. Top of cabinet is removable for easy access to controls.

**CASTERS:** Cabinet shall have 4 heavy duty 5" casters, 2 rigid and 2 swivel casters mounted to 6" x 6" x 5/16" steel plate drilled and tapped. Cabinet shall have a full wrap around rubber bumper. Bumper mounted to bottom of cabinet frame. Bumper extends past all hardware and body of cabinet. (Note: Models BQ150 and BQ200 come standard with 5" x 2" casters)

Cabinet shall come complete with four chrome plated handles, two on each end.

## Accessories, Options, Variations

- Pass-thru doors
- Left hand hinged doors
- Heavy-duty 8" casters
- Exterior edges protected with 1" x 1" x 1/8" stainless steel angle
- Flush mounted heavy-duty paddle latch
- Heavy-duty transport latch that will accept a padlock, 12 gauge stainless steel
- Dutch doors
- Cord reel
- Stainless steel adjustable legs
- Menu card holder
- Heavy Duty tow hitch assembly



451 E. County Line Rd. • P.O. Box 1089 • Mooresville, IN 46158  
800-733-8073 • Local 317-831-7030 • Fax 317-831-7036  
www.secoselect.com