



# N8600-FWH Hot Well

Individually Controlled Dry Hot Wells

N8600-FWH

## Models

- N8618-FWH 18" Low Watt Dry Hot Well Drop-in
- N8633-FWH 33" Low Watt Dry Hot Well Drop-in
- N8648-FWH 48" Low Watt Dry Hot Well Drop-in
- N8663-FWH 63" Low Watt Dry Hot Well Drop-in
- N8678-FWH 78" Low Watt Dry Hot Well Drop-in
- N8693-FWH 93" Low Watt Dry Hot Well Drop-in



N8648-FWH

## Standard Features

- NSF-4 certified for hot operation
- Wells operate independently for hot operation
- Flush mount pans standard
- Thermostatic temperature controls
- Dry operation only - No water required
- High density environmentally friendly Kyoto Protocol compliant, Non-ODP (Ozone Depletion Potential), Non-GWP (Global Warming Potential) polyurethane foam throughout
- Push in flange gasket is standard
- 2-year parts and labor warranty, standard parts warranty
- Adapter bars

## Options & Accessories

## Specifications

**Top:** Top is constructed of one-piece stainless steel.


**Interior:** Interior liner is constructed of aluminum with flush mount flange for heating to accommodate up to 6" (15cm) deep 12"x20" pans, pans supplied by others.

**Exterior:** Exterior body is constructed of galvanized steel with High density environmentally friendly Kyoto Protocol compliant, Non-ODP (Ozone Depletion Potential), Non-GWP (Global Warming Potential) polyurethane foam throughout.


**Operation:** Remote control panel contains lighted on/off power switch and thermostat for heated operation.

**Electrical:** All drop-in units must be hard wired at installation.




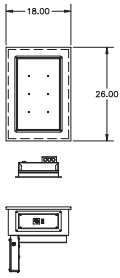


**N8618-FWB**

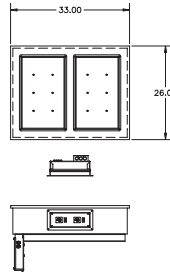


**N8633-FWB**

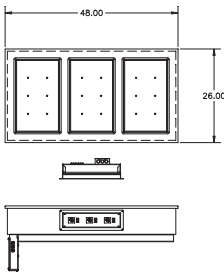


**N8648-FWB**

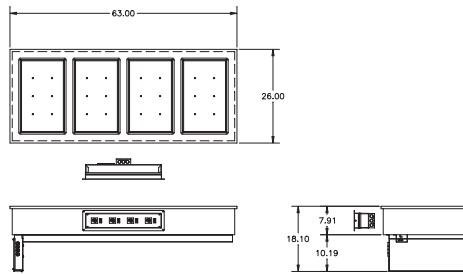

**N8663-FWB**

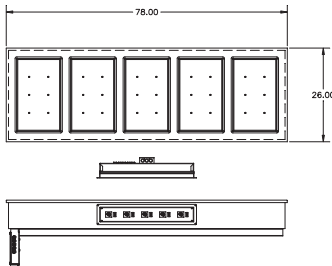


**N8678-FWB**

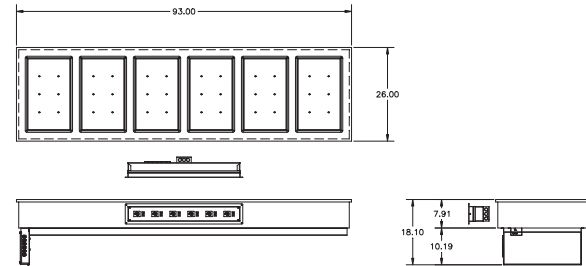

**N8693-FWB**

Model	12"x20" Pan capacity	Electrical <i>500 watt per well, Amps per well</i>	WxDxH	Top Cutout dimensions (D)	Control Cutout dimensions (G)
N8618-FWH	1	500 W, 208Y-240 V, 1PH, 2.0 A	18" x 26" x 18.13"	17.00" x 25.00" (43cm x 64cm)	11.38" x 4.38" (29cm x 11cm)
N8633-FWH	2	(2) 500 W, 208Y-240 V, 1PH, 4.0 A	33" x 26" x 18.13"	32.00" x 25.00" (82cm x 64cm)	11.38" x 4.38" (29cm x 11cm)
N8648-FWH	3	(3) 500 W, 208Y-240 V, 1PH, 6.0 A	48" x 26" x 18.13"	47.00" x 25.00" (120cm x 64cm)	16.38" x 4.38" (42cm x 11cm)
N8663-FWH	4	(4) 500 W, 208Y-240 V, 1PH, 8.0 A	63" x 26" x 18.13"	62.00" x 25.00" (158cm x 64cm)	21.38" x 4.38" (55cm x 11cm)
N8678-FWH	5	(5) 500 W, 208Y-240 V, 1PH, 10.0 A	78" x 26" x 18.13"	77.00" x 25.00" (196cm x 64cm)	26.38" x 4.38" (67cm x 11cm)
N8693-FWH	6	(6) 500 W, 208Y-240 V, 1PH, 12.0 A	93" x 26" x 18.13"	92.00" x 25.00" (234cm x 64cm)	31.38" x 4.38" (80cm x 11cm)

N8600-FWH

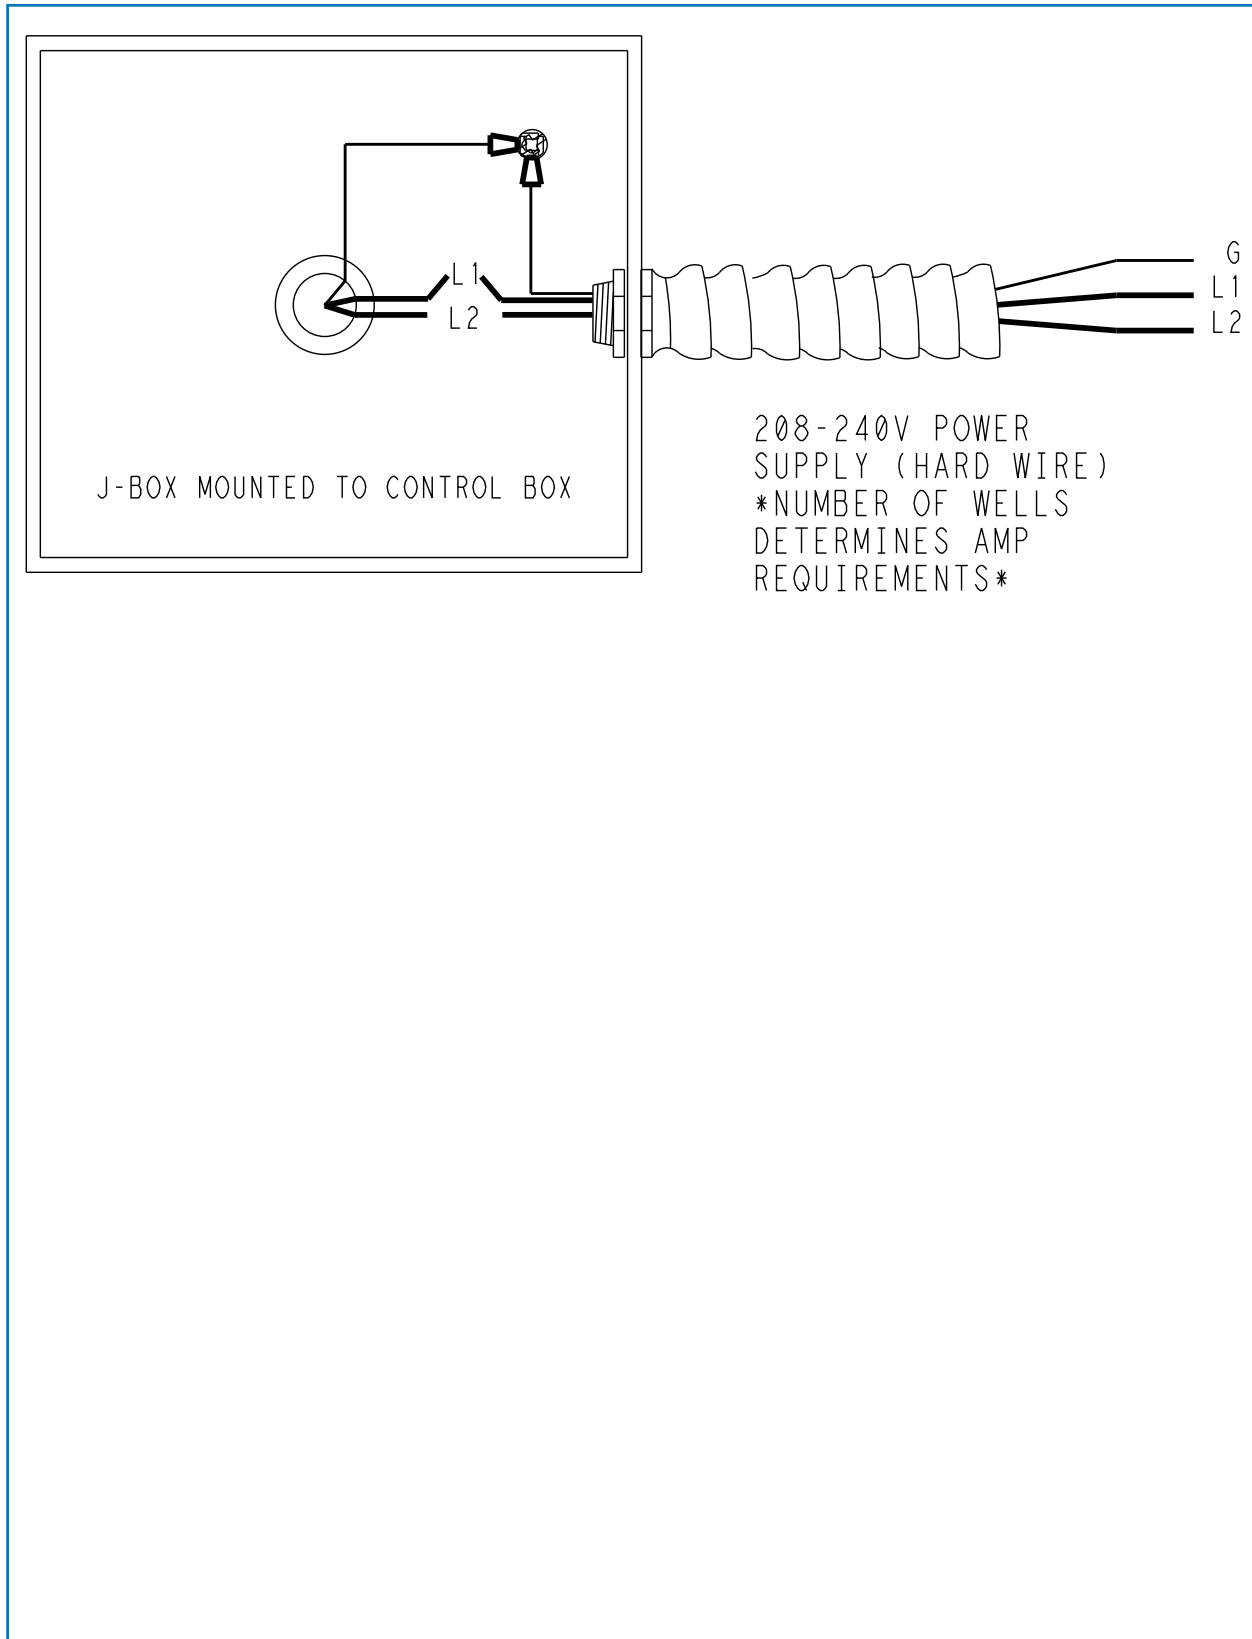

Welbilt reserves the right to make changes to the design or specifications without prior notice.