

Cuisine Series Heavy Duty 12" Add-A-Unit

Project	
Item	_
Quantity	
CSI Section 11400	
Approved	
Date	

Models

- C12-6S
- C12-6M



Model C12-6 12" Add-A-Units, Open Burners

Standard Features

- 35,000 BTU/h (NG) Garland Starfire open top burners
- One-piece cast iron grates and bowls over each open top burner
- Stainless steel front and sides
- Stainless steel front rail
- · Stainless steel burner box
- 1-1/4" NPT front gas manifold
- Can be installed individually or in a battery
- 7" (178mm) high stainless steel stub back
- 6" (152mm) stainless steel adj. legs
- Modular unit (M) can be mounted on Polar Cuisine refrigerated base

Options & Accessories

- Single or double deck high shelf or back riser
- Full height stand for modular base with legs or casters
- Stainless steel intermediate shelf for cabinet base
- Stainless steel door(s) for cabinet base units
- Stainless steel back
- Continuous plate rail, 48-72" for battery installations
- Gas shut-off valves: 3/4" (M/S models only), 1", 1 1/4" NPT (Specify)
- Gas regulator: 3/4" (M/S models only), 1", 1 1/4" NPT (Specify)
- Gas flex hose w/ quick disconnect: 3/4" (M/S models only), 1", 1 1/4" NPT (Specify)
- Set of (4) flanged feet (for fastening unit to the floor)
- Set of (4) 5" polyurethane nonmarking swivel casters w/front brakes
- Extension for 1/9 pans

Specifications

Garland Cuisine Add-A-Unit, Model _____ with total BTU/h rating _____ when used with natural/propane gas. Stainless steel finish & 6" (152mm) legs w/adjustable feet.

Open Burners - 35,000 BTU/h and a one piece grate and bowl over each burner.

NOTE: Units suppled with casters must be installed with an approved restraining device.














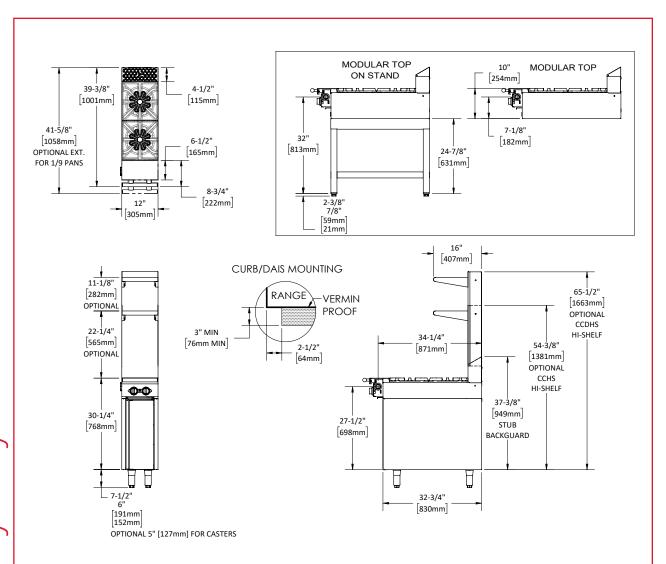

Model #	Description	Total BTU/h NAT. Gas	Total BTU/h Propane	Shipping	
				Cu Ft	lbs/kg
C12-6S	12" (305mm) OB with Storage Base	70,000	66,000	28	190/86
C12-6M	12" (305mm) OB Modular Top	70,000	66,000	26	190/86

OB = Open Burner, FT= French Top, HT = Hot Top

VG = Manual Valve Controlled Griddle,

TG= Thermostatic Controlled Griddle

Combustible Wall Clearance		
Sides Back		
10" (254mm)	6" (152mm)	

Individual Burner Ratings (BTU/h)			
Burner	NAT.	PRO.	
Open Top	35,000	33,000	

Dimensions: In (mm)	Unit	Cabinet Interior
Width	12" (305mm)	9-1/2"(241mm)
Depth	39 3/8" (1001mm)	28-1/2" (724mm)
Height	30 1/4" (769mm)	19-1/2" (495mm)
Height w/ 6" legs	36 1/4" (921mm)	N/A

Gas Pressure	NAT.	PRO.	
Minimum Supply	7" WC	11" WC	
Manifold Operating Pressure	6" WC	10" WC	
Gas Manifold 1-1/4" NP			

Welbilt reserves the right to make changes to the design or specifications without prior notice.

