

VISION

Chocolate Showcases

STANDARD FEATURES

Humidity control
Triple pane glass on all sides
Tempered glass shelving
No defrost shut down requirement for low temp
Dixell digital controller
LED lighting
Lockable casters
Cases ship standard silver finish
Available lengths: 26"L and 34"L

OPTIONS

Front and back access doors
Custom color finish or stainless steel base
Dual temp, all in one low and medium temp
Adjustable legs



VISION CHOCOLATE									
TECHNICAL FEATURES		Single Door				Double Doors (Front & Back)			
		VC6314 H60	VC6314 H76	VC8314 H60	VC8314 H76	VC6314D H60	VC6314D H76	VC8314D H60	VC8314D H76
External Dimensions (L-D-H)	Inches	26" - 25 1/2" - 60"	26" - 25 1/2" - 76"	34" - 25 1/2" - 60"	34" - 25 1/2" - 76"	26" - 27 3/4" - 60"	26" - 27 3/4" - 76"	34" - 27 3/4" - 60"	34" - 27 3/4" - 76"
Inches-MM	MM	660 - 647 - 1524	660 - 647 - 1930	863 - 647 - 1524	863 - 647 - 1930	660 - 647 - 1524	660 - 647 - 1930	863 - 704 - 1524	863 - 704 - 1930
Crated Dimensions (L-D-H)	Inches	36" - 32" - 67"	36" - 32" - 80"	40" - 32" - 67"	40" - 32" - 80"	36" - 33" - 67"	36" - 33" - 80"	40" - 33" - 67"	40" - 33" - 80"
Inches-MM	MM	914 - 812 - 1701	914 - 812 - 2032	1016 - 812 - 1701	1016 - 812 - 2032	914 - 838 - 1701	914 - 838 - 2032	1016 - 838 - 1701	1016 - 838 - 2032
Humidity Control	Type	35-70%	35-70%	35-70%	35-70%	35-70%	35-70%	35-70%	35-70%
Refrigeration	Type	R404A	R404A	R404A	R404A	R404A	R404A	R404A	R404A
Operating Temperature	°F	58°F	58°F	58°F	58°F	58°F	58°F	58°F	58°F
Compressor	Nr./Type	Hermetic	Hermetic	Hermetic	Hermetic	Hermetic	Hermetic	Hermetic	Hermetic
BTU'S @ +35°F Evap Temperature	BTU'S	1500 BTU'S	1500 BTU'S	1900 BTU'S	1900 BTU'S	1500 BTU'S	1500 BTU'S	1900 BTU'S	1900 BTU'S
Electric Supply	(V/Ph/Hz)	220/1/60	220/1/60	220/1/60	220/1/60	220/1/60	220/1/60	220/1/60	220/1/60
Power Consumption	(A)	8A	8A	9A	9A	9A	9A	10A	10A
Climatic Class	F°/H.R.	75°F/55%	75°F/55%	75°F/55%	75°F/55%	75°F/55%	75°F/55%	75°F/55%	75°F/55%
Net Weights	Kg/Lb	215Kgs / 430Lbs	255Kgs / 510Lbs	240Kgs / 480Lbs	280Kgs / 560Lbs	250Kgs / 500Lbs	290Kgs / 580Lbs	280Kgs / 560Lbs	320Kgs / 640Lbs
Crated Weights	Kg/Lb	242Kgs / 485Lbs	282Kgs / 565Lbs	262Kgs / 525Lbs	302Kgs / 605Lbs	262Kgs / 525Lbs	302Kgs / 605Lbs	300Kgs / 600Lbs	340Kgs / 680Lbs

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.





512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com



SINGLE DOOR

VC6314 H76 & VC8314 H76



VC6314 H60 & VC8314 H60

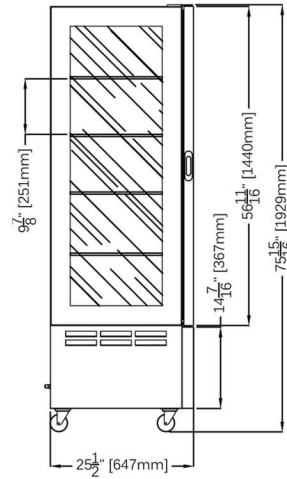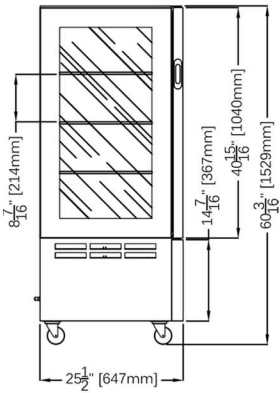

DOUBLE DOORS

VC6314D H76 & VC8314D H76


VC6314D H60 & VC8314D H60

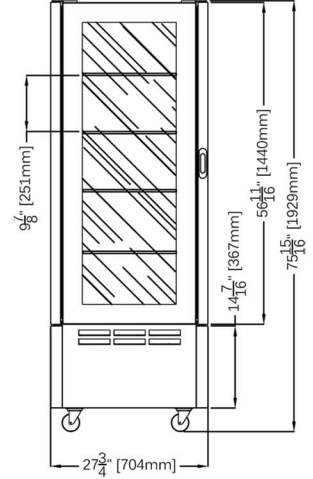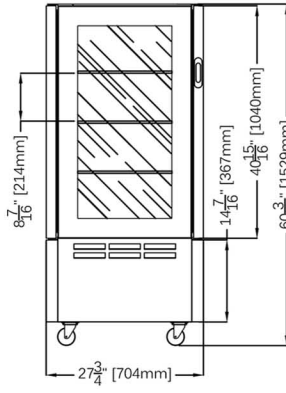


PLAN VIEWS:

SINGLE DOOR

VC6314 H60/H76




VC8314 H60/H76




DOUBLE DOORS

VC6314D H60/H76




VC8314D H60/H76

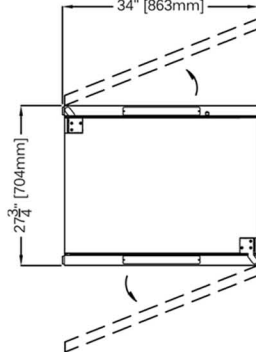


REAR ELEVATIONS:


VC6314 H60




VC8314 H60



VC6314 H76

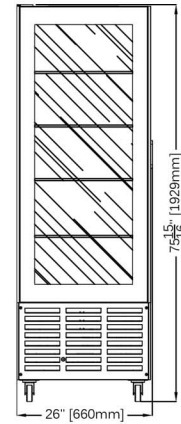


VC8314 H76

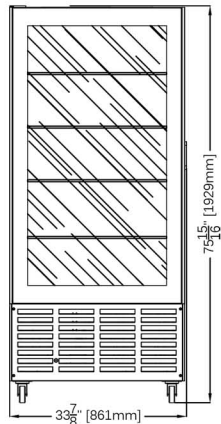


FRONT ELEVATIONS:


VC6314 H60




VC8314 H60



VC6314 H76

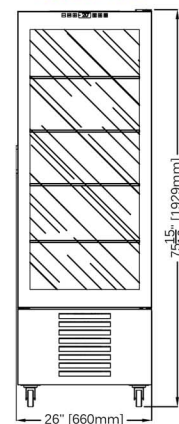

VC8314 H76

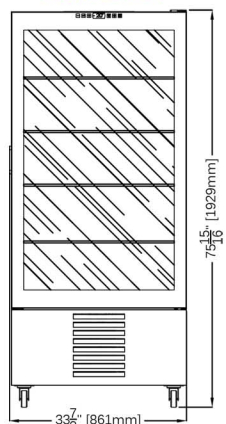

* Manufacturer reserves the right to change specifications without notice. Not responsible for error and omissions.