# **DUAL TEMP REFRIGERATOR/FREEZER**

### **Model: 3RRFENHD**

Natural Refrigerant R-290 Model

# 3-Section Extra-Wide Dual Temp Side-By-Side Reach-In Refrigerator/ Freezer (0°F) with Half Doors

 $\ensuremath{\mathsf{3RRFEN}}$  - Stainless steel front, aluminum end panels and interior

3RRFENSA - Stainless steel exterior, aluminum interior

3RRFENSS - Stainless steel exterior and interior



### **Options and Accessories**

(upcharge and lead times may apply)

Stainless steel case back	Hinged glass doors
Additional epoxy coated steel shelves	Increased refrigeration systems (consult factory)
Chrome or stainless steel shelves	Special electrical req. (consult factory)
Heavy duty pilaster strips	Full doors
Pan slide assemblies	Correctional Facility Options
Rehinging of doors (consult factory)	One way security screws
Wine rack (refrigerator section)	Locking hasp (lock not included)
Adjustable legs	Stainless steel mesh cover
Custom laminates	Coverless hinges
Pass-Thru (consult factory)	

Consult factory for other model configurations, options and accessories.



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Project Name:	
Model Specified:	
model opecifica.	
Location:	
Item No:	Quantity:
AIA #:	SIS #:

### **Standard Model Features**

#### **REFRIGERATION SYSTEM**

Separate, self contained, performance rated refrigeration systems

Natural, environmentally safe, high efficiency R-290 refrigerant<sup>1</sup>

Automatic, electric condensate evaporator

Expansion valve system

Freezer section: standard operating temperature is 0 to -5°F and can be adjusted to operate as low as -10°F in a 90°F ambient.

#### **CABINET ARCHITECTURE**

3" non-CFC polyurethane foam insulation

Smooth, polished chrome workflow door handles

Cam action, lift off hinges

Self-closing doors

Magnetic snap in Santoprene™ door gaskets

Cylinder lock in each door

Heavy duty, epoxy coated steel shelves

5" casters

#### **MODEL FEATURES**

LED interior lighting

Electronic controllers with digital display & hi-low alarm

Off-cycle defrost (refrigerator section)

Automatic electric defrost (freezer section)

<sup>1</sup> R-290 refrigerant meets all federal and state regulatory requirements.

APPROVAL:

# **Model Specifications**

DIMENSIONAL DATA	
Net Capacity (cubic feet)	50/21 (1416/595 cu I)
Width, Overall (inches)	85 ½ (2172 mm)
Depth, Overall (inches) (including handles)	35 3/8 (899 mm)
Depth (inches) (less doors)	32 (813 mm)
Depth (inches) (doors open 90°)	58 (1473 mm)
Clear Door Width (inches)	21 % (556 mm)
Clear Half Door Height (inches)	27 ½ (699 mm)
Height, Overall (inches) (including 5" casters)	82 ½ (2089 mm)
Number of Doors	6
Number of Shelves	9
Shelf Area (square feet) (per section)	20.4 (1.9 sq m)
Tray Slide Capacity (per half section)	11
REFRIGERANT DATA	
Condensing Unit Size (H.P.)	1/3+, 1/2
Capacity (BTU per hour)*	2560 / 1590
ELECTRICAL DATA	

### ELECTRICAL DATA

Voltage (International)	115/60/1 (220/50/1)
Feed Wires (including ground)	3/3
Total Amps (International)	8.1 (4.9) / 7.6 (4.2)
Defrost Amps (International)	3.7 (2.0)
10 ft. Cord/Plug [attach.] (International)	Yes (No)

#### **SHIPPING DATA**

Height - Crated (inches)	85 ½ (2172 mm)
Width - Crated (inches)	90 (2286 mm)
Depth - Crated (inches)	42 (1067 mm)
Volume - Crated (cubic feet)	181 (5125 cu I)
Weight Std - Crated (pounds)	885 (401 kg)
Weight SS - Crated (pounds)	995 (451 kg)

- \* Rating @ +25°F evaporator, 90°F ambient (refrigerator)

\* Rating @ -15°F evaporator, 90°F ambient (freezer)
Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.

Equipped with two NEMA-5-15P Plugs (varies by country)

Toll-Free: 800-523-7138 Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

Due to our continued efforts in developing innovative products, specifications subject to change without notice.









© Copyright 2021. Continental Refrigerator. A Division of National Refrigeration & Air Conditioning Products, Inc.

## **Model Plan Views**

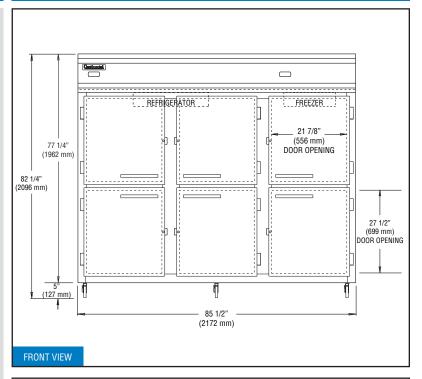

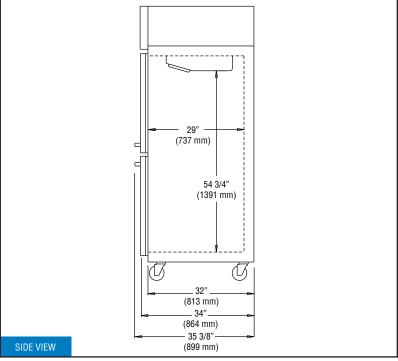

**IMPORTANT NOTE**: If the cabinet is located directly against a wall and/or under a low ceiling, a minimum clearance of 12" is required on top and 3" on sides and rear.