




Provino I cheese & charcuterie with custom finish

Visit our website for optional RAL colors and Materials finishes.

[RAL Colors Website](#)

[Materials Brochure PDF](#)



Examples of optional 6mm thick stone back panel behind shelf. For full selection see our Materials Brochure.

Project Name: \_\_\_\_\_

Item #: \_\_\_\_\_ Quantity: \_\_\_\_\_

# PROVINO I

## CHEESE & CHARCUTERIE

MODELS: PROVINO I CC700, CC1400, CC1400-2T, CC2100, CC2800

### STANDARD FEATURES

- Solid Side
- Dual Medium Temperature Version with intermediate double glass divider
- Triple pane glass premium door
- Steel load bearing structure
- 3000°K LED lighting with dimmer switch
- Touch Control
- Ventilated cooling
- interior vertical shelf support in stainless steel
- adjustable feet
- standard steel 304A
- stainless steel interior and exterior
- Stainless steel shelves adjustable in height on racks
- programmed automatic electric defrost
- Approvals: cETLus, ETL sanitation, certified CE
- Self-contained
- Condensate evaporator pan

### OPTIONS

- RAL Color Option powder coated door handles exterior and interior over stainless steel
- 6mm thick stone back panel behind shelf
- Front wood laminate door and handles
- interior shelf trim
- 6mm thick stone back panel behind shelf
- Glass Sides
- Sliding Doors
- Front wood laminate storage doors finish on base
- top door and interior shelf trim
- Top door
- door locks
- Remote application
- Top mounted condensing unit
- water cooled
- central refrigeration rack
- 60 Hz components UL
- Narrow depth
- front breathing available for 1400 - 2800 models

\*Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®

512 South Airport Blvd., South San Francisco, CA 94080

Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400


sales@oscartek.com | www.oscartek.com






Discover the Art of Display...


**MODELS:** PROVINO I CC700, CC1400, CC1400-2T, CC2100, CC2800

**PROVINO I  
PLAN VIEWS**

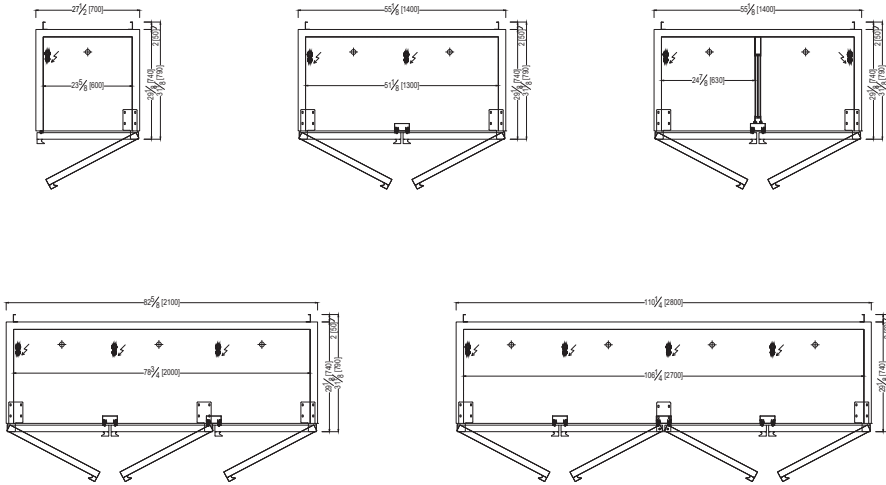

ELECTRICAL LEGEND	
	REFRIGERATION LINES
	DRAIN
	POWER

**PROVINO I  
REAR ELEVATIONS (OPERATOR SIDE)**

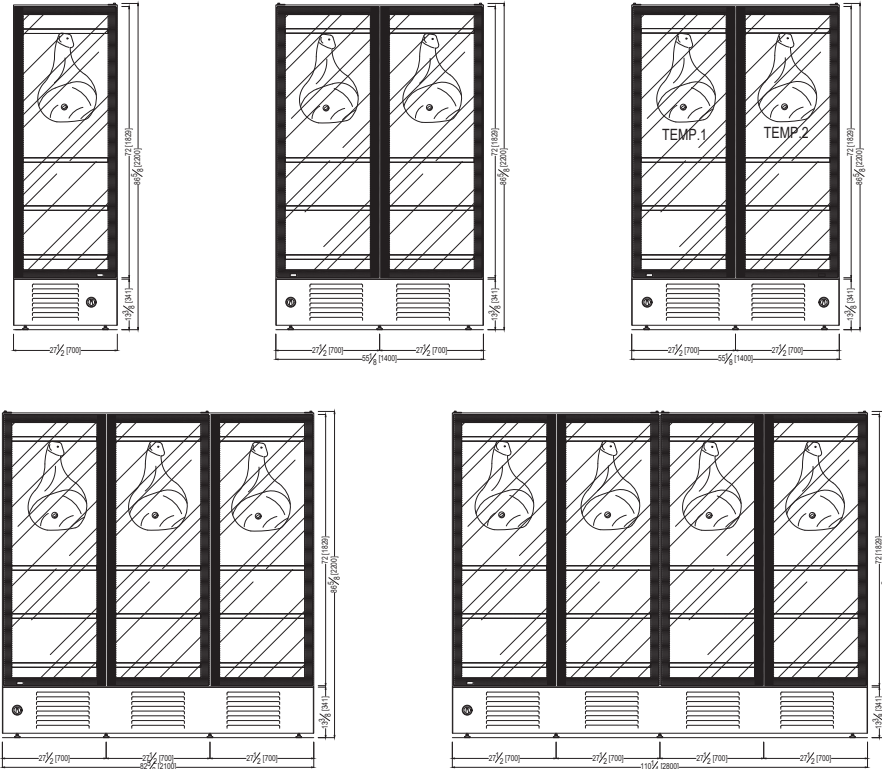

\*Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®  
512 South Airport Blvd., South San Francisco, CA 94080  
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400  
sales@oscartek.com | www.oscartek.com



**MODELS:** PROVINO I CC700, CC1400, CC1400-2T, CC2100, CC2800

**PROVINO I - STANDARD DEPTH SECTION VIEWS**


**STANDARD:  
SELF-CONTAINED**

**OPTIONAL:  
GLASS SIDE**

**STANDARD:  
REMOTE**

**OPTIONAL:  
TOP MOUNTED  
CONDENSING UNIT**

**OPTIONAL:  
SLIDING DOORS  
ONLY IN SOLID SIDES AND  
2100, 2800 MODELS**

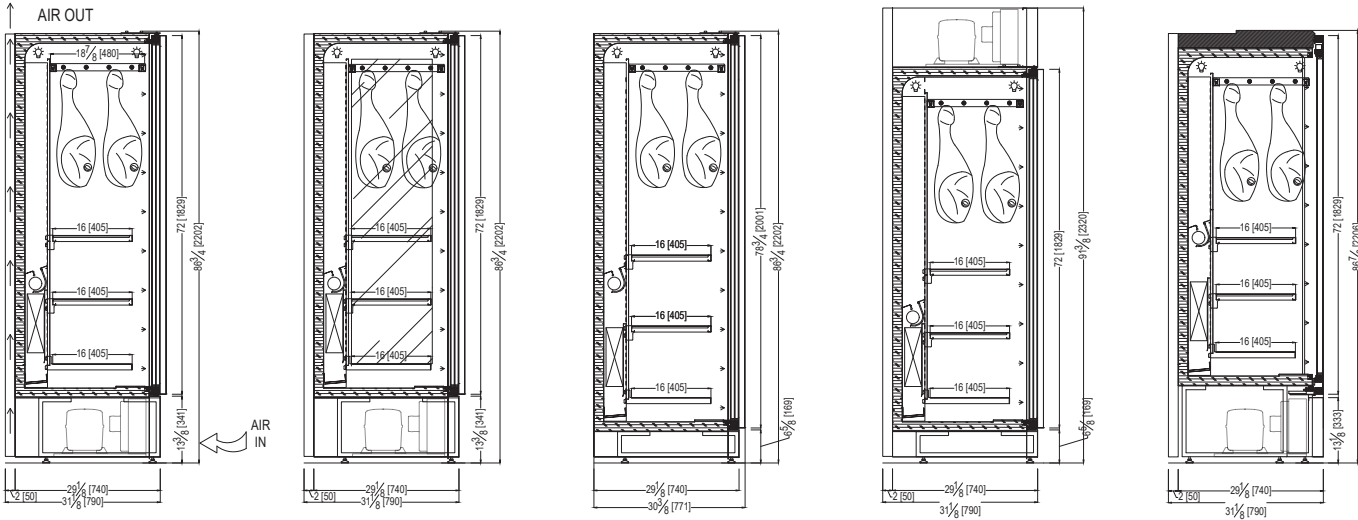

**PROVINO I - NARROW DEPTH SECTION VIEWS**


**STANDARD:  
SELF-CONTAINED**

**OPTIONAL:  
GLASS SIDE**

**STANDARD:  
REMOTE**

**OPTIONAL:  
TOP MOUNTED  
CONDENSING UNIT**

**OPTIONAL:  
SLIDING DOORS  
ONLY IN SOLID SIDES AND  
2100, 2800 MODELS**

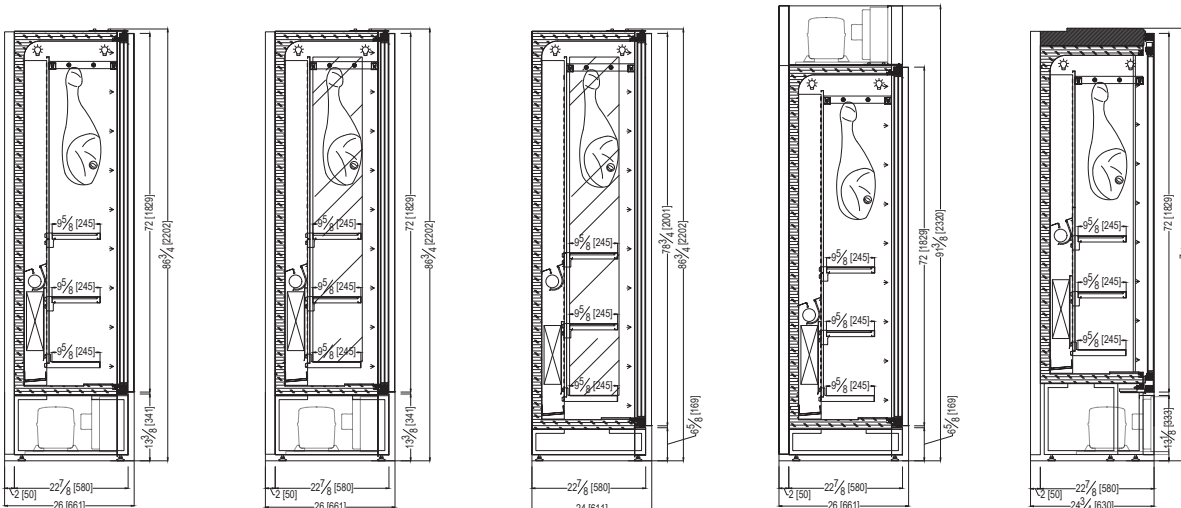

\*Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®  
512 South Airport Blvd., South San Francisco, CA 94080  
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400  
sales@oscartek.com | www.oscartek.com





Discover the Art of Display...

Project Name: \_\_\_\_\_

Item #: \_\_\_\_\_ Quantity: \_\_\_\_\_

**MODELS: PROVINO I CC700, CC1400, CC1400-2T, CC2100, CC2800**

PROVINO I CHEESE & CHARCUTERIE - SELF CONTAINED						
TECHNICAL FEATURES		MODELS				
Model Name (Model ETL Code)		PROVINO I CC700 (MUROGALA1P)	PROVINO I CC1400 (MUROGALA2P)	PROVINO I CC1400-2T (MUROGALA1P)X2	PROVINO I CC2100 (MUROGALA3P)	PROVINO I CC2800 (MUROGALA4P)
External Dimensions (L-D-H)	Inches	*27 1/2" - 32 3/8" - 86 3/4"	*55 1/8" - 32 3/8" - 86 3/4"	*55 1/8" - 32 3/8" - 86 3/4"	*82 5/8" - 32 3/8" - 86 3/4"	*110 1/4" - 32 3/8" - 86 3/4"
	Inches-MM	*700 - 821 - 2022	*1400 - 821 - 2022	*1400 - 821 - 2022	*2100 - 821 - 2022	*2800 - 821 - 2022
Crated Dimensions (L-D-H)	Inches	35" - 39" - 98"	63" - 39" - 98"	63" - 39" - 98"	90" - 39" - 98"	118" - 39" - 98"
	Inches-MM	880 - 970 - 2470	1580 - 970 - 2470	1580 - 970 - 2470	2280 - 970 - 2470	2980 - 970 - 2470
Refrigeration	Type	Fan - Ventilated	Fan - Ventilated	Fan - Ventilated	Fan - Ventilated	Fan - Ventilated
Refrigeration Display Area	Type	Deck	Deck	Deck	Deck	Deck
Number of Glass Doors	#	1	2	2	3	4
Operating Temperature	°F	32°F to 41°F	32°F to 41°F	32°F to 41°F	32°F to 41°F	32°F to 41°F
Condensing Units	#	1	2	2	3	4
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	1 / Hermetic	1 / Hermetic	2 / Hermetic
Electric Supply	(V/Ph/Hz)	220/1/60	220/1/60	(2) 220/1/60	220/1/60	220/1/60
Power Consumption	(W/A)	700/3.9	1200/6.9	(2) 650/3.5	1700/9.5	2300/12.9
Defrost	Mode/Type	Automatic	Automatic	Automatic	Automatic	Automatic
Climatic Class	°F/%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH
Refrigerant Gas	Type	R290	R290	R290	R290	R291
Net Weights	Lb	309	573	661	750	904
Crated Weights	Lb	369	633	721	810	964

\*DIMENSIONS WITH POLISHED S/S SIDES

PROVINO I CHEESE & CHARCUTERIE - REMOTE						
TECHNICAL FEATURES		MODELS				
Model Name (Model Code)		PROVINO I CC700 (MUROGALA1P)	PROVINO I CC1400 (MUROGALA2P)	PROVINO I CC1400-2T (MUROGALA1P)X2	PROVINO I CC2100 (MUROGALA3P)	PROVINO I CC2800 (MUROGALA4P)
External Dimensions (L-D-H)	Inches	*27 1/2" - 30 3/8" - 86 3/4"	*55 1/8" - 30 3/8" - 86 3/4"	*55 1/8" - 30 3/8" - 86 3/4"	*82 5/8" - 30 3/8" - 86 3/4"	*110 1/4" - 30 3/8" - 86 3/4"
	Inches-MM	*700 - 771 - 2022	*1400 - 771 - 2022	*1400 - 771 - 2022	*2100 - 771 - 2022	*2800 - 771 - 2022
Crated Dimensions (L-D-H)	Inches	35" - 39" - 98"	63" - 39" - 98"	63" - 39" - 98"	90" - 39" - 98"	118" - 39" - 98"
	Inches-MM	880 - 970 - 2470	1580 - 970 - 2470	1580 - 970 - 2470	2280 - 970 - 2470	2980 - 970 - 2470
Refrigeration	Type	Fan - Ventilated	Fan - Ventilated	Fan - Ventilated	Fan - Ventilated	Fan - Ventilated
Refrigeration Display Area	Type	Deck	Deck	Deck	Deck	Deck
Number of Glass Doors	#	1	2	2	3	4
Operating Temperature	°F	32°F to 41°F	32°F to 41°F	32°F to 41°F	32°F to 41°F	32°F to 41°F
Condensing Units	#	1	2	2	3	4
Compressor	Nr./Type	1 / Hermetic	1 / Hermetic	1 / Hermetic	1 / Hermetic	2 / Hermetic
BTU'S @ +14°F Evap Temperature	BTU/H	2730	4980	(2) 2500	6830	7950
Electric Supply	(V/Ph/Hz)	220/1/60	220/1/60	(2) 220/1/60	220/1/60	220/1/60
Power Consumption	(W/A)	700/3.9	1200/6.9	(2) 650/3.5	1700/9.5	2300/12.9
Defrost	Mode/Type	Automatic	Automatic	Automatic	Automatic	Automatic
Climatic Class	°F/%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH	75°F-55%RH
Refrigerant Gas	Type	R452a	R452a	R452a	R452a	R452a
Pipe Size (Suction-Liquid)	(INCHES)	15/32"- 15/64"	35/64" - 5/16"	(2) 15/32"- 15/64"	5/8" - 5/16"	45/64" - 25/64"
Net Weights	Lb	309	573	661	750	904
Crated Weights	Lb	369	633	721	810	964

\*DIMENSIONS WITH POLISHED S/S SIDES

\*Oscartek® reserves the right to change, modify, discontinue, or change any features, sizes, or capacity on any model without prior notice.

OSCARTEK®  
 512 South Airport Blvd., South San Francisco, CA 94080  
 Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400  
 sales@oscartek.com | www.oscartek.com

