



PROJECT

ITEM NO:

QUANTITY:

Gas Connection Hose Kit

FEATURES

- Triple Protect Stainless Steel Hose
 - Corrugated Stainless Steel Inner Layer
 - Stainless Steel Braided Center Layer
 - Sapphire PVC Coating



LENGTH	24"	36"	48"	60"	72"
MODEL	TGH-7524QD	TGH-7536QD	TGH-7548QD	TGH-7560QD	TGH-7572QD

Gas Connection Hose Kit Includes



90° Street Elbow



Full Port Valve



Quick Disconnect



Super Swivel



Restraining Cable Kit




Triple Protect Stainless Steel Gas Hose includes 3/4" Male Coupling on Each End with 360° Rotation Technology

TYPICAL INSTALLATION

Installation shall be made with a connector that complies with the standard for connectors for movable Gas Appliances ANSI Z21.69 CSA6.16 and a Quick-Disconnect Device complying the standard for use with gas fuel ANSI Z21.41 CSA 6.9. Adequate means for limiting the movement of the appliance without depending on the connector or Quick-Disconnect Device,

The restraining device should be attached to the appliance on the back panel.

The front casters on the appliance must be equipped with brakes to limit the movement of appliance without placing any strain on the connector or quick-disconnect device or its associated piping. Set the length of restraining device so that the connector is not kinked when the restraining device is fully extended.

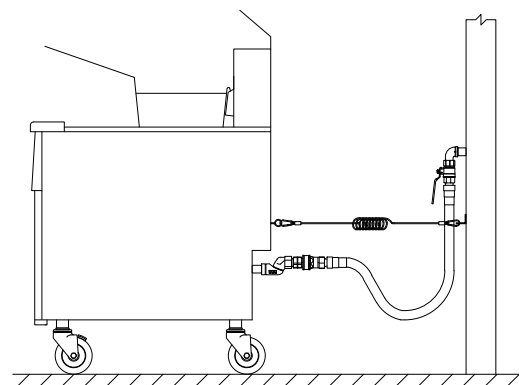

Rev. 9/20

SAPPHIRE MANUFACTURING
Tel: 718-543-2111
Fax: 718-543-2121

info@SapphireManufacturing.com
WWW.SapphireManufacturing.com