



Electrolux

EMPower 2 Drawer Refrigerated Chef Base 48" - Modular Installation

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____



169210 (COMPCHEF48M) 2 Drawer Refrigerated Chef Base 48", modular installation

Short Form Specification

Item No. _____

Unit to be Electrolux Two (2) Drawer Refrigerated Chef Base with built-in compressor unit. Unit able to operate with temperature range from 32° F to 41° F (+0°C to +5°C). Digital thermostat and display are protected by the Stainless Steel front panel. Stainless Steel front panel with incorporated Stainless Steel wire grate is easy to remove for access to the thermostat and to allow for easy cleaning. Delivered with stainless steel insulated top predisposed for flush connection between base and Electrolux top units and between any side units. Delivered on casters.



APPROVAL: _____

Main Features

- Digital thermostat and display are protected by the Stainless Steel front panel.
- Heavy duty Stainless Steel tubular drawer handles.
- Two (2) Drawer Refrigerated/Freezer Base with built-in compressor unit.
- Unit able to operate as refrigerator with temperature range from 32° F to 41° F (+0° C to +5° C).
- Stainless Steel front panel with incorporated Stainless Steel wire grate is easy to remove (protected by key lock) for access to the thermostat and to allow for easy cleaning.
- To be installed not closer than 2" (5 cm) from any wall or hot cooking appliances.
- The refrigerated air is discharged at the rear of the unit.
- Automatic defrost every 6 hours, the unit will turn off so the evaporator coil can defrost.
- Stainless steel flat top with holes for modular (flush) connection between base and Electrolux top units.
- Frontal drip nose to prevent grease and water infiltration into the drawers.

Construction

- Entirely constructed in stainless steel.
- Storage capacity is 6,5 Cu-ft (184lt).
- Unit to be mounted on casters and may be installed on feet (optional accessory).



Electrolux

2 Drawer Refrigerated Chef Base 48" - Modular Installation

EMPower

Electrolux Professional, Inc.



www.electroluxusa.com/professional

10200 David Taylor Drive, Charlotte, NC 28262 • Telephone Number: 866-449-4200 • Fax Number: 704-547-7401




Electrolux

EMPower 2 Drawer Refrigerated Chef Base 48" - Modular Installation

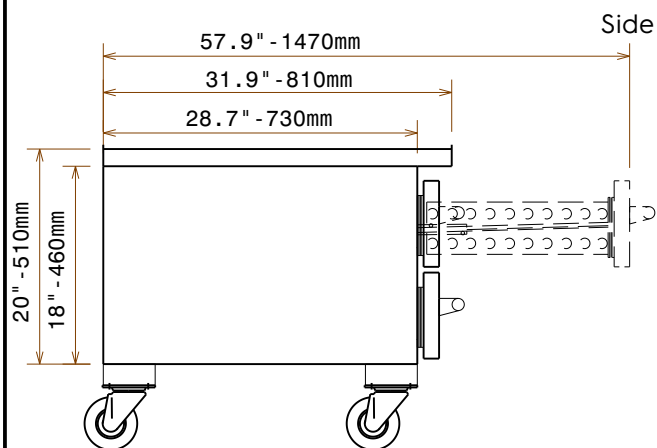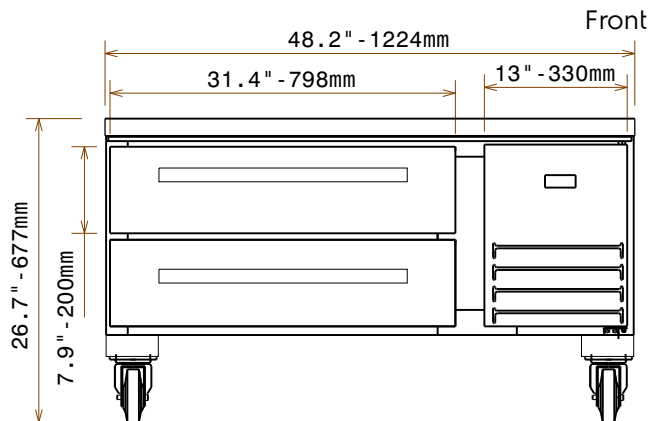

El = Electrical connection

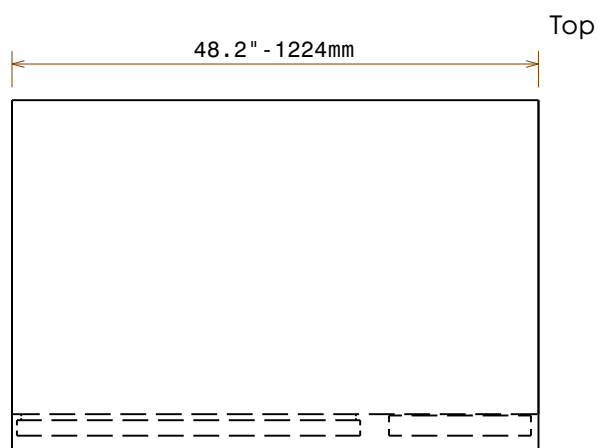

Electric

Supply voltage:

169210 (COMPCHEF48M) 115 V/1 ph/60 Hz

Rated amps:

5.8 A

Total Watts:

0.6 kW

Plug type:

USA NEMA 5-15P

Key Information:

External dimensions, Width: 48 " (1219.2 mm)

External dimensions, Depth: 31 7/8" (810 mm)

External dimensions, Height: 26 5/8" (677 mm)

Net weight: 236 lbs (107 kg)

Shipping width: 33 1/16" (840 mm)

Shipping depth: 49 3/16" (1249 mm)

Shipping height: 28 3/8" (721 mm)

Shipping weight: 262 lbs (119 kg)

Shipping volume: 26.71 ft³ (0.76 m³)

Refrigerant weight: 0.198 lbs (90 g)

Refrigeration Data

Compressor power:

Refrigerant type:

R290

Refrigeration power:

0 W



Electrolux

EMPower
2 Drawer Refrigerated Chef Base
48" - Modular Installation