

PC Non-Refrigerated Pastry Case



MODEL SHOWN: PC3982

NOTE: SHOWN WITH OPTIONAL FRONT STORAGE

- ☐ PC3982
- ☐ PC5682
- ☐ PC7482

Lengths include 1" end panels
41"L x 39"D x 83-1/4"H
58"L x 39"D x 83-1/4"H
76"L x 39"D x 83-1/4"H

STANDARD FEATURES

- 12" straight blade power cord
- Angled mirror in upper display
- Clear glass swinging doors (self-closing)
- LED 3500K top & shelf lights
- Levelers
- One year parts & labor warranty
- PC3982 holds (10) 18" x 26" trays
- PC5682 holds (15) 18" x 26" trays
- PC7482 holds (20) 18" x 26" trays
- Shelving removable and adjustable on 1" centers

Features	Standard	Options
EXTERIOR COLOR	☐ Laminated (non-premium) Confirm pattern/grain direction	☐ Laminated (premium) Confirm pattern/grain direction ☐ Painted (stock colors, specify RAL#)
INTERIOR COLOR	☐ Black	☐ White
BASE	☐ Straight base w/o front storage	☐ Angled base w/ front storage & waste bin ☐ Straight base w/ front storage & waste bin
END PANEL LEFT	☐ Full end panel w/mirror interior	☐ Cutaway w/glass end panel ☐ None (specify per line-up)
END PANEL RIGHT	☐ Full end panel w/mirror interior	☐ Cutaway w/glass end panel ☐ None (specify per line-up)
HEADER	☐ ¹ Flat	☒ ¹ Curved
LOWER REAR	☐ Open	☐ Dry storage w/ sliding solid doors
UPPER REAR	☐ Solid back panel	☐ Reflective glass rear sliding doors
SHELVING	☐ Tray support lighted shelves, (trays not included)	☐ Wire rack shelves, lighted
MISCELLANEOUS		☐ Header exhaust fans ☐ Seal between doors ☐ Second year parts & labor warranty
ACCESSORIES		☐ Price tag molding (matches interior color)

Std Notes: 1 - Laminated Only

Option Notes: 1 - Painted Only




Zone	Intended Product To Be Displayed
------	----------------------------------

[illegible]

Ambient

PLAN VIEW

SIDE VIEW

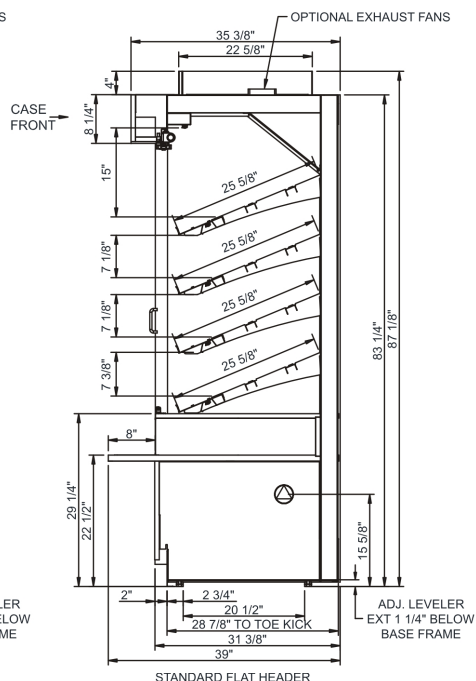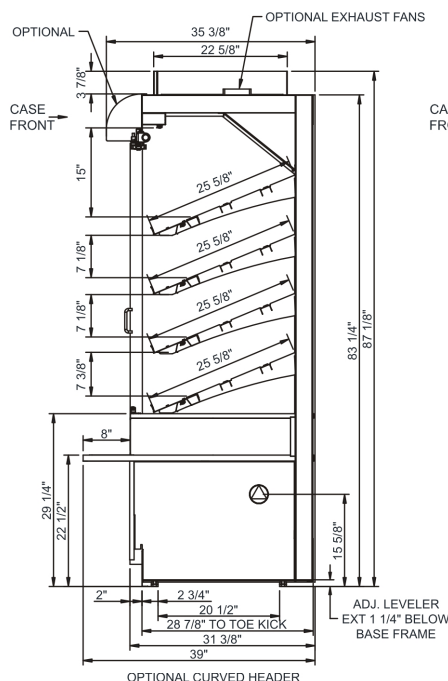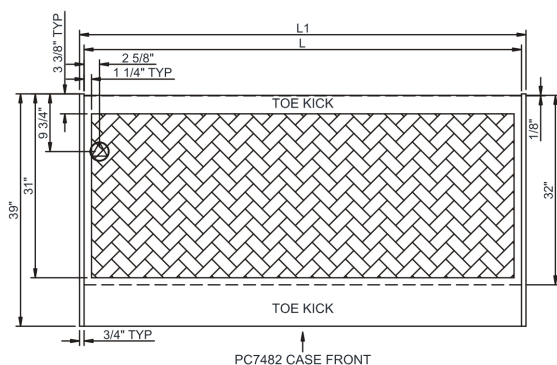

NOTE: ALL DIMENSIONS APPROXIMATE



Model Technical Specifications

Model	L"	L1"	L2"	System Circuit Volts			Phs	Freq	Amps ***	Watts	Wires	NEMA Plug	SST	Conv. Rack BTUH	Para. Rack BTUH	Est Wt
PC3982	39.00	41.00	.00	Ambient/Lights	Circuit #1	110-120	1	60	1.06	117	2+G	5-15P	N/A	N/A	N/A	700
PC5682	56.00	58.00	.00	Ambient/Lights	Circuit #1	110-120	1	60	1.52	160	2+G	5-15P	N/A	N/A	N/A	1,050
PC7482	74.00	76.00	.00	Ambient/Lights	Circuit #1	110-120	1	60	1.77	200	2+G	5-15P	N/A	N/A	N/A	1,250

*** Does not include electric defrost on freezer models.

Regulatory Approvals:

All Models	ETL Listed to UL 65 ETL Sanitation to NSF 2
------------	--



Important Notes:

- 1) ELECTRICAL NOTE: If GFCI is required, a GFCI breaker MUST be used in lieu of a GFCI receptacle.
- 2) 40" minimum door entry clearance required (without shipping skid).
- 3) Units are supplied with levelers which must be adjusted during installation to ensure the unit is level and plumb.
- 4) Dimensions reflect levelers extended 1-1/4".

⚠ WARNING: This product can expose you to chemicals, including Urethane (Ethyl Carbamate), which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov.