



Project: _____ Item# _____

Parrilla GMB 200-3GR

TECHNICAL INFORMATION

Fire up time ¹	30 min-average	
Cooking temperature	482 °F	250 °C
Total cooking surface area	(26.97" x 24.8") + 2x (19.69 x 24.8)	(685 x 630 mm) + 2x (500 x 630 mm)
Grill height range	13.78"	350 mm
Initial charcoal load ¹	44 lb	20 kg
Charcoal load duration ²	5 h	
Equivalent power*	8 hp	6 kW
Exhaust rate	374 gal/s	5100 m³/h
Installation height*	27.56"	700 mm
Net weight ³	1135 lb	515 kg
Crated weight* ³	1510 lb	685 kg
Crated size (WxDxH)	44" x 87" x 54"	1120 x 2200 x 1380 mm

*Approximate data

1. Consult instruction manual

2. Will vary depending on quality of charcoal

3. Weight with accessories included

FEATURES

Precision and strength is key to the PARRILLA by MIBRASA®. Effortlessly regulate the height of your grill surface thanks to the carefully engineered sprocket and chain system, keeping maintenance down to a minimum.

The system lets us sear, cook and rest our ingredients, to get the optimal result every time.

ERGONOMICALLY DESIGNED WITH MAXIMUM QUALITY AND SECURITY

With a sloping grill, the grease runs down the weld-free grill bars to prevent grease build-up. Grease drips down to the collector with an easy to remove mechanism ready to clean.

The base is lined with refractory bricks to ensure maximum heat efficiency and resistance to pure fire. And the built-in cooling system in outer case guarantees a maximum level of security.

Built using quality steels providing strength and durability; ergonomically designed for practicality and ease of use, each feature plays a crucial part in delivering the ultimate grilling machine for every chef.

INCLUDED ACCESSORIES

- 1 rod grill [CPV160]
- 2 rod grills [CPV160F]
- Ember poker [PK]
- Ash shovel [PALA]
- 2 Mibrasa tongs [TG]
- Grill brush [CEP]

OPTIONAL ACCESSORIES

- V-shape grill [CPV160]
- V-shape grill [CPV160F]
- Extra rod grill [CPV160]
- Extra rod grill [CPV160F]
- Burning pit lid [TAPA50]
- Vertical cooking rack [CPH-200-3GR]
- Swivel hook [GGCV]
- Thermal protector [EPGMB200-3GR]
- Espeto skewer kit [KITESPGMB200]
- GN support kit [SGN200]

Specifications and design are subject to change without notice.

QUALITY GUARANTEE






Technical drawing of the 'L' model, showing a side elevation. The unit features three burners with circular control knobs above them. The overall width is 81.77 inches [2077] mm, and the height is 36.42 inches [925] mm. The base has a central control panel with a flame icon and the brand name 'Heraeus'.

Technical drawing of the front view of the 'K' model. The drawing shows a rectangular frame with a central opening. Dimensions are provided in millimeters (mm) and inches (in):


- Top width: 39.92 [1014]
- Left height: 41.79 [1062]
- Right height: 65.41 [1661]
- Bottom width (inner): 31.02 [788]
- Bottom width (outer): 33.96 [859]

Technical drawing of a three-bay industrial oven. The drawing shows a side elevation with dimensions in millimeters (mm) and inches (in). The total width is 75.63 mm [1921]. The distance between the centers of the three bays is 19.19 mm [488]. The distance from the center of the middle bay to the left and right ends is 10.41 mm [265]. The height of the oven is 23.15 mm [588]. The drawing includes details of the oven's structure, including the door, the heating elements, and the support legs.


Rod bar grill




V-shape grill



GRILL DIMENSIONS




HEATING RACK DIMENSIONS



Revit drawings available on request at
usa@mibrasa.com

Dimensions in inches and [mm]

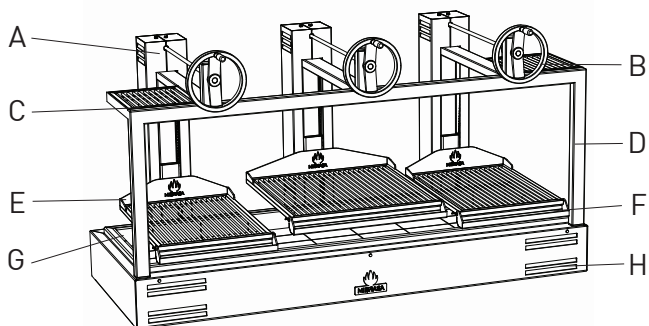

A	Elevating system
B	Elevating wheel
C	Heating rack
D	Structure
E	Grill
F	Grease collector
G	Refractory bricks
H	Main body

Safety standards and installation guidelines

- Combustible floor protection dimensions: a. 30 in [762 mm] to each side of the Parrilla
b. 36 in [914 mm] in front of the Parrilla
- Clearances to combustible construction/other appliances: a. Unit to backwall = 7 in [180 mm]
b. Unit to sidewalls = 28 in [720 mm]
- The workspace for the chef should be 27.56 in [700 mm] from the front of the Parrilla.
- A lifting device should be used whenever possible to lift the Parrilla and place on the countertop/stand.

For further information, please consult the instruction manual.

Specifications and design are subject to change without notice.

Rev. 2/23 Printed in U.S.A.

MIBRASA® USA Corp.
8950 SW 74th Ct., Suite 1406
Miami, Florida 33156 - U.S.A
Ph: (408) 348 7607 - usa@mibrasa.com
www.mibrasa.com



Parrilla GMB 200-3GR

OPTIONAL COMPLETE STAND



TECHNICAL INFORMATION


Ref.	GMB200-3GR + MCGMB200	
Net weight ³	1411 lb	640kg
Crated weight* ³	1786 lb	810 kg
Crated size (WxDxH)	44" x 87" x 85"	1120 x 2200 x 2150 mm

Ref.	MCGMB200	
Net weight ³	275.5 lb	125 kg
Crated weight* ³	320 lb	145 kg
Crated size (WxDxH)	44" x 87" x 28"	1120 x 2200 x 700 mm
No. drawers	3	
No. GN rack slots	5	


OPTIONAL ACCESSORIES

- S/S Casters [WINOXG]

FRONT VIEW

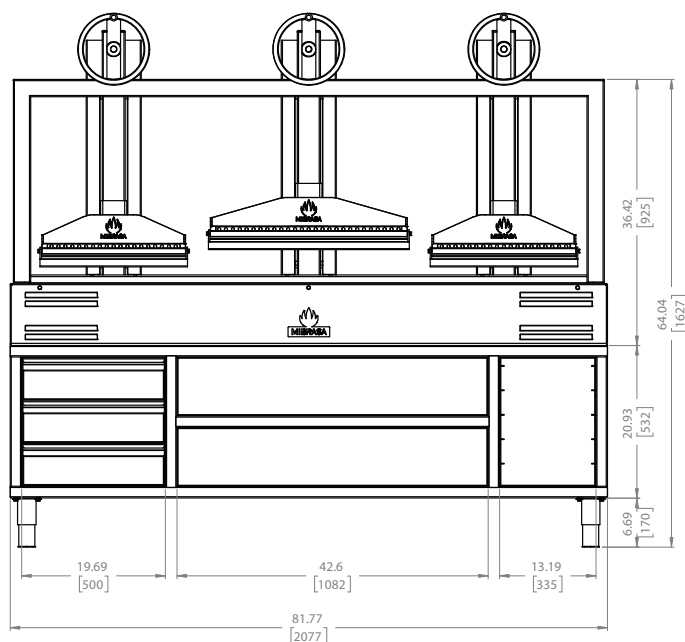

SIDE VIEW

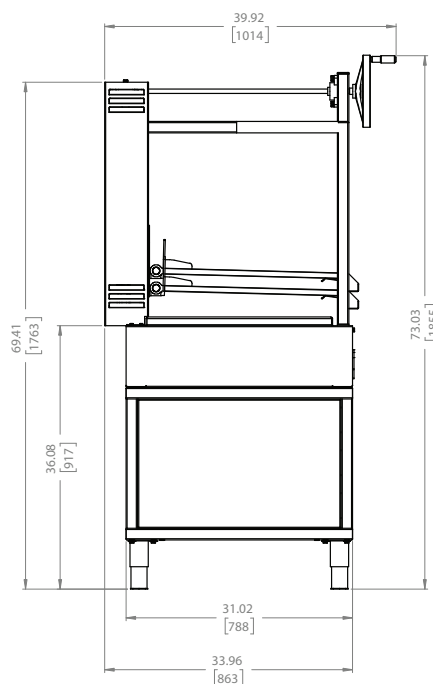

Dimensions in inches and [mm]