


ASSEMBLY INSTRUCTIONS

Security Cage

- Step 1 Assemble shelving unit with a minimum of three shelves. The top shelf should be mounted at the top groove of the post. The bottom shelf on a 66" post must be on the first groove. The other shelves should be placed in the middle according to your needs.

Make sure steel insert is set already into the top post. **DO NOT SCREW IN THE BOLTS UNTIL ALL PANELS ARE INSTALLED.**

- Step 2 Assemble the side panels with the loops on the top facing inward. Tilt the panel so it looks around the posts on both ends and then slide down so the loops are around the insert that was installed at the top of the post (Diagram 1). Partially screw in bolt through guide plate into top of the front post. This will keep side panel in place during the assembly process. Repeat with the other panel.
- Step 3 Assemble left side back panel first. Place the wires that are facing downward into the loops on each side panel.
- Step 4 Repeat the same for the right side back panel as in stop #3.
- Step 5 Secure back panels with back panel assembly hardware. Install as shown in Diagram 3. For greater security, assemble uppermost plates through top shelf. Place additional securing clip at the bottom of the back panels. Push down so the 2 prongs of the clip wrap over the truss of the bottom shelf.
- Step 6 Install the left door assembly, making sure the top is curved inward, by placing the side wires into the loops of the side panels.
- Step 7 Repeat with right door assembly as in stop #6.
- Step 8 Line up holes in top of panels over the steel inserts in the top of the posts and screw in bolts into back posts (Diagram 4). Tighten down bolts in front posts.

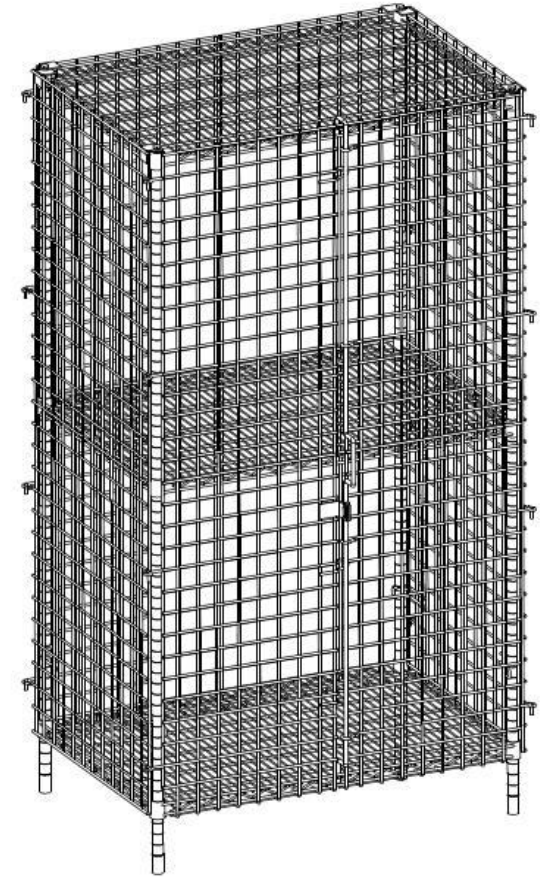

ASSEMBLY INSTRUCTIONS

Security Cage

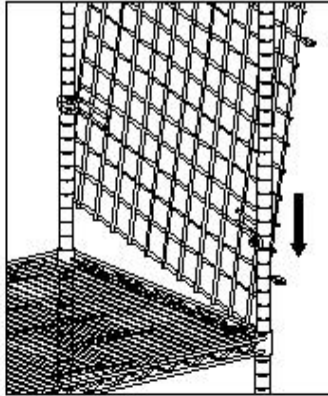


Diagrama 1

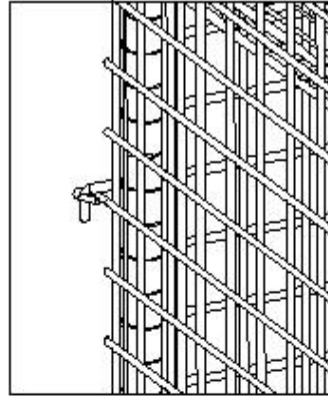


Diagrama 2

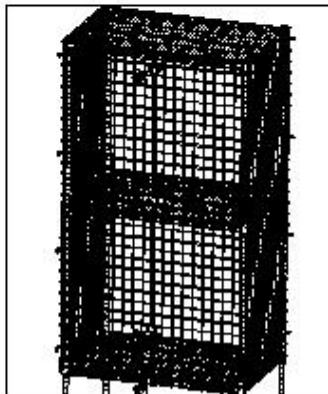


Diagrama 3

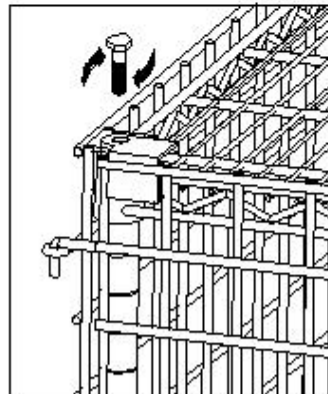


Diagrama 4

