



CRB-48



CRB-30



Sloped front

clean reach ice storage bins

Features

Two capacities available: 300 lb (136 kg) or 500 lb (227 kg)

Convenient design

- ergonomic opening and sloped liner for easy reach
- large opening for scoop dispensing
- easy lift door stays open for easy access and maintenance
- 30.00" (76.2 cm) bin matches with compact ice machines to maximize ice production and storage in small space

Durable construction

- seamless polyethylene liner with coved corners for high sanitation
- 1.50" (3.81 cm) foamed in-place polyurethane insulation keeps ice colder for longer
- factory installed 1" IPS stainless steel drain
- adjustable flanged feet provide stability
- optional baffle to prevent ice overflow

Easy installation

- all models will fit through 32.00" (81.3 cm) doors

Warranty

- 1 year parts and labor
- 3rd party ice machines must be installed and operated in accordance with the manufacturer's instructions
- visit kloppenberg.com for complete warranty details

Certifications (applied to all models unless otherwise noted)



Options and accessories¹

Stainless steel liner (coved corners) (contact factory)

Ice shovel (item# 4030063)

Ice scoop (item# 4030062)

48" (121.9 cm) ice paddle (item# 4030060)

60" (152.4 cm) ice paddle (item# 4030061)

SmartCART™ 75 ice transport cart with three removable Totes™ ice carriers, 75 lb (34.0 kg) capacity (item# 00112771)


Cambro Cart ICS125L ice transport cart, 125 lb 56.8 kg) capacity (item# ICS125L)

SmartCART 240 ice transport cart, 240 lb (109.0 kg) capacity (item# ROTOCART)

Ice cart, 250 lb (114.0 kg) capacity (item# PCC_250)

¹ Certifications do not apply to options and accessories.

Dimensional drawing

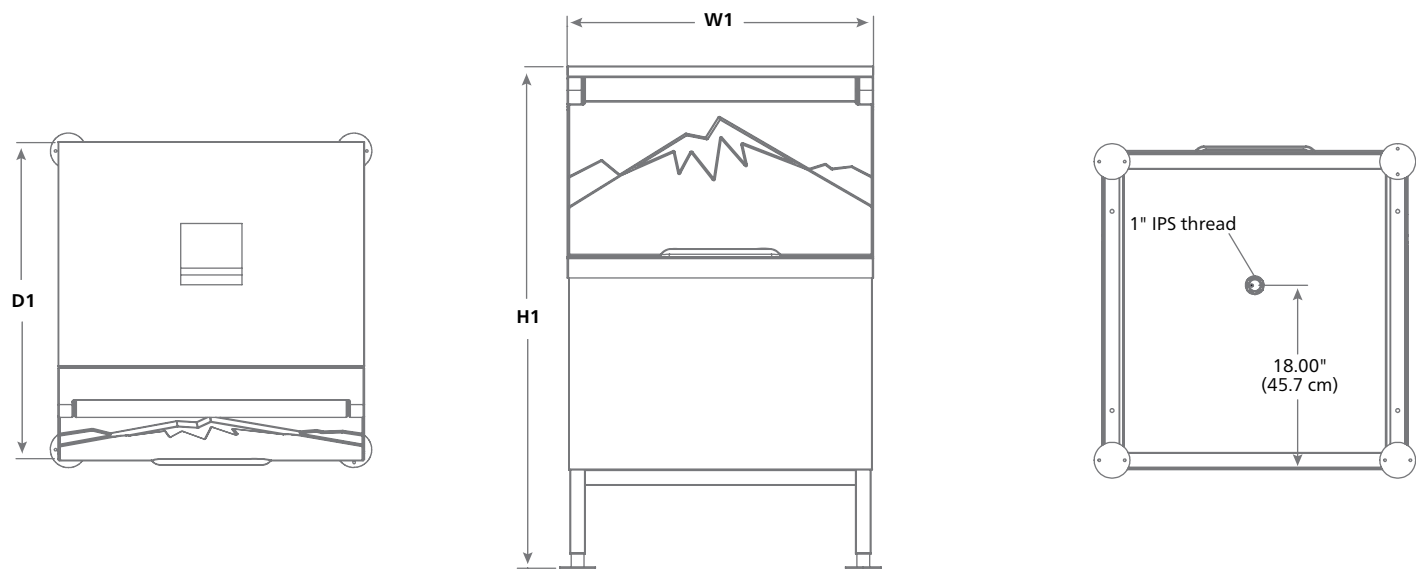

Model	Maximum bin capacity lb (kg)	Width - W1 in (cm)	Depth - D1 ¹ in (cm)	Height - H1 in (cm)	Minimum door clearance in (cm)	Approximate ship weight lb (kg)
CRB-30	300 (136)	30.00 (76.2)	32.00 (81.3)	49.00 (125.5)	30.00 (76.2)	151 (68.6)
CRB-48	500 (227)	48.00 (121.9)	32.00 (81.3)	49.00 (125.5)	32.00 (81.2)	229 (104.0)

¹ Includes 1.5" (3.81 cm) depth for slope front.

SHORT FORM SPECIFICATION: Ice storage bin to be Kloppenberg® model _____CRB-30 (300 lb (136 kg) of ice storage) or _____CRB-48 (500 lb (227 kg) of ice storage). 304 stainless steel front and sides, stainless steel or galvanized back and bottom. Bin insulation to be CARB compliant non-HFC polyurethane foam 1.50" (3.81 cm) thick. Bin liner to be _____seamless polyethylene or _____304 stainless steel with option for seamless fully welded coved corners. ABS plastic bin top adapter provided with 304 stainless steel support frame and filler panels (custom cut bin top to be constructed of 304 stainless steel for non-compatible ice machine configuration). The easy lift HDPE (High Density Polyethylene) door comes installed and locks in place when opened. Bin to have adjustable flanged feet. Bin drain to be 1.00" IPS stainless steel. NSF listed.

SMARTCART and TOTES are trademarks of Follett Products, LLC.
FOLLETT and KLOPPENBERG are registered trademark of Follett Products, LLC, registered in the US.
Follett reserves the right to change specifications at any time without obligation. Certifications may vary depending on country of origin.

Sloped front clean reach ice storage bins