



# BEVERAGE-AIR

|                 |      |
|-----------------|------|
| Project: _____  | AIA# |
| Item: _____     |      |
| Location: _____ | SIS# |
| Approved: _____ |      |

# BB78HC BACK BAR REFRIGERATOR

## BAR EQUIPMENT- BACK BAR REFRIGERATOR

MODEL:  
BB78HC-1-B

BB78HC Solid Door  
Hydrocarbon Series



**5 Year Parts/Labor Warranty Available**  
**7 Year Compressor Warranty**

### CABINET CONSTRUCTION

- Exterior features durable black painted steel
- Interior construction utilizes galvanized steel on walls and ceiling, heavy duty stainless steel floor
- Full electronic control
- 1 ½" Stainless steel top
- Self-closing doors with 120° stay-open feature
- Field reversible doors (hinge kit not included)
- Door locks
- Magnetic door gaskets provide positive door sealing
- LED lighting
- Packaged products only
- Six (6) epoxy coated wire shelves
- Compressor available on left or right, specify at time of unit order
- Balanced, forced air refrigeration system provides rapid chilling of product

### OPTIONS & ACCESSORIES

- 3 Year parts/labor standard, additional 2 year warranty available
- For stainless steel interior (refer to -F models)
- Galvanized sub-top
- Wine model (40°-60° models)
- Wire shelf divider
- Additional shelves
- Additional shelf clips
- 3" or 6" Casters
- 6" Black legs
- Remote option\* (see note on back on page)

### REFRIGERATION SYSTEM

- Uses environmentally friendly, energy efficient R290 refrigerant, and meets all regulatory requirements for CARB, SNAP, DOE & more
- Adaptive defrost
- Epoxy coated evaporator coil
- Maintains product temperature between 36°F and 38°F



Please verify qualifying units by visiting:  
[www.energystar.gov/cfs](http://www.energystar.gov/cfs)

3779 Champion Blvd., Winston-Salem, NC 27105  
1-888-845-9800 Fax: 1-336-245-6453  
Beverage-Air.com Sales@bevair.com




# BEVERAGE-AIR

## Bar Equipment-Back Bar Refrigerator Model: BB78HC-1-B


| MODEL                            | BB78HC-1-B    |
|----------------------------------|---------------|
| <b>EXTERNAL DIMENSIONAL DATA</b> |               |
| Width Overall (in)               | 79"           |
| Depth Overall (in)               | 29 1/8"       |
| Height Overall (in)              | 37 1/4"       |
| Number of Doors                  | 3             |
| Depth with Door Open 90° (in)    | 49 1/4"       |
| Door Openings (in)               | 19 7/8" x 30" |
| <b>INTERNAL DIMENSIONAL DATA</b> |               |
| NET Capacity (cubic ft.)         | 33.59         |
| Internal Width Useable (in)      | 66 1/4"       |
| Internal Depth Overall (in)      | 23"           |
| Internal Height Overall (in)     | 32 1/8"       |
| Number of Shelves                | 6             |
| Number of 1/2 Kegs               | 4             |
| <b>ELECTRICAL DATA</b>           |               |
| Full Load Amperes                | 5.5           |
| <b>REFRIGERATION DATA</b>        |               |
| Horsepower                       | 1/3           |
| Capacity (BTU/Hr)                | 2392          |
| Heat Rejection (BTU/Hr)          | 3588          |
| Charge (lbs/grams)               | 0.2535/115    |
| <b>SHIPPING DATA</b>             |               |
| Gross Weight - Crated            | 448 lbs       |
| Height - Crated                  | 44"           |
| Width - Crated                   | 81"           |
| Depth - Crated                   | 31"           |

\*NOTE: Remote units are field wired and come with 6" legs.  
Refrigerant must be specified at time of order.


### Model Views

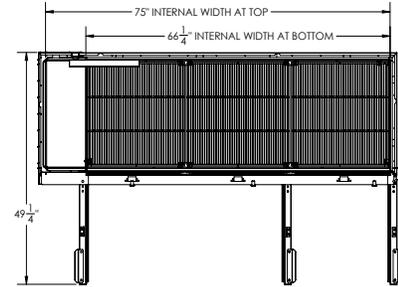

### PLAN VIEW

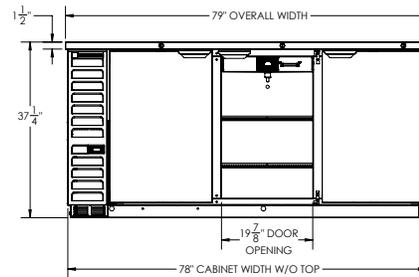

### ELEVATION VIEW



### SIDE VIEW



### ELECTRICAL CONNECTION

115/60/1  
NEMA 5-15P

Unit pre-wired at factory  
and include 8' long cord  
and plug set.