



**74-CFI-F shown with options:** (A) Beaded, stainless steel tray slide and (M) buffet shield single service hinged protector.



U.L. Sanitation Classified to NSF Standards

- Durable, colorful, molded fiberglass
- Easy to clean, low maintenance
- Convenient portability, or use in a line up
- Full complement of options available

## Specifications

**Top** - Top to be 30" wide and fabricated from a minimum of 14 ga. stainless steel with square turndown on all sides and corners fully welded, ground and polished. Top to have #4 satin finish and with all edges having a #7 hi-lite finish.

**Body (F)** - Body to be seamless molded fiberglass (F.R.P.) with smooth exterior surfaces and rounded corners. To be constructed by a hand lay-up process with four layers of 1.5 oz continuous strand fiberglass mat, plus a 24 oz layer of woven roving on the bottom for added strength. Fiberglass to be flame retardant per specification ASTM E-162 having a flame spread of 25% or less. Body interior to be reinforced at each end with 4 wide, 12 gauge galvanized channels welded to form integral U frame for maximum stress relief.

**Cold Pan** - The ice cooled cold pan shall be of 18 ga. Stainless steel and be 6" deep or as required. The welded watertight pan to be fully insulated with urethane insulation and have sectional, removable false bottom. A full perimeter breaker strip shall separate the top from the cold pan. Pan to have 1 open brass drain with extension to shut off valve below base.

## Options

### Top

- ☐ Height other than std. 36" (specify \_\_\_\_)
- ☐ (FF) End Drop Shelf

### Above the Top

- ☐ (F) Overshelf
- ☐ (GA) Sloped Front Protector, Adjustable
- ☐ (GAG) Sloped Front Protector - Adjustable - Glass Top Shelf
- ☐ (GC) Sloped Front Protector, Glass Clips
- ☐ (M) Buffet Shield Single Service Hinged
- ☐ (N) Buffet Shield Double Service Hinged
- ☐ (GTS) Glass Top Shelf for Protector or Buffet Shield

- ☐ (I) 2 tier Display Shelf, single service
- ☐ (I2) 2 tier Display Shelf, double service
- ☐ Powder Coated finish (specify RAL # \_\_\_\_)
- ☐ (RR) LED Lights

### Tray Slide/Cutting Board Options

- ☐ (A) Beaded, stainless steel tray slide
- ☐ (B) Flat Surface, st. stl. tray slide
- ☐ (C) Tubular stainless steel tray slide
- ☐ (D) 8 wide Stainless Steel cutting board
- ☐ (E) 8 wide Richlite® composite cutting board
- ☐ Other cutting board width (specify \_\_\_\_)

### Base Options

- ☐ (EB) Enclosed Base - no under storage
- ☐ (Y) Hinged Doors
- ☐ (CC) Refrigerated Storage Base (36 high units only)
- ☐ (NN) Fiberglass Door Panels
- ☐ (MM) Vertical Trim Strips
- ☐ (SS) Stainless Steel Legs
- ☐ S/S Toe Kick

### Plumbing & Electrical Options

- ☐ (DD) Convenience outlet, flush
- ☐ Alternate Drain Location \_\_\_\_\_

Project: \_\_\_\_\_

Item: \_\_\_\_\_

Quantity: \_\_\_\_\_

Date: \_\_\_\_\_

### Models Length

<input type="checkbox"/> 36-CFI-F	36 3/8"
<input type="checkbox"/> 50-CFI-F	50 3/8"
<input type="checkbox"/> 60-CFI-F	60 3/8"
<input type="checkbox"/> 66-CFI-F	66 3/8"
<input type="checkbox"/> 74-CFI-F	74 3/8"
<input type="checkbox"/> 84-CFI-F	84 3/8"
<input type="checkbox"/> 96-CFI-F	96 3/8"
<input type="checkbox"/> 144-CFI-F	144 3/8"

### Standard Features

- ✓ 30" wide 14 gauge stainless steel top
- ✓ Molded fiberglass body
- ✓ Open Storage Base
- ✓ 5" Locking Swivel Casters
- ✓ Adapter Bars
- ✓ Cam Operated Line-up Locks
- ✓ Adapter Bar for Cold Food pans




Molded Fiberglass (F)



A.I.A. File No. 00-0-00

SIS No. 00-0-00

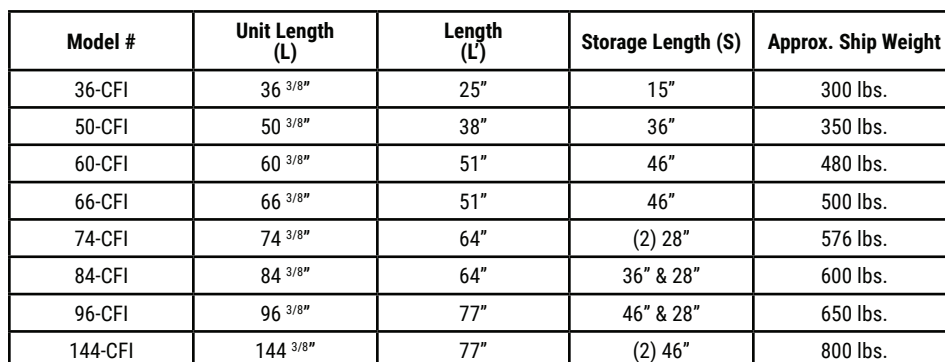

Note: Ice pans need not be full length of body (specify pan length).

### Décor Options (Contact Factory)

- ☐ Vinyl Graphic Wrap
- ☐ Body Decal
- ☐ Canopy (specify style & color)
- ☐ Over-structure with signage & lights  
(specify\_\_\_\_\_)
- ☐ Stand Off Panel  
(specify materials\_\_\_\_\_)

We reserve the right to change specifications and product design without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions or replacement for previously purchased equipment.

All equipment to be built in accordance with the Underwriters Laboratories, Inc. and the National Sanitation Foundation, Inc. standards and shall bear the Underwriters Laboratories, Inc. listing label for safety and the Underwriters Laboratories classification label for sanitation.

