





Gelato Showcase.

Heated front glass, lift-up top glass, side glasses with aesthetic antifog warming system, brilliant aluminum profiles, operator side closure with plexiglass sliding panels, LED lighting system | tank insulated with ecological polyurethane and covered in stainless steel | ventilated refrigeration with increased "delivery port" | electronic control unit and digital temperature reader flush with the worktop | worktop and perimeter shelf in polished steel | pre-arrangement for pans dim. $14 \frac{1}{16} \times 6 \frac{7}{16} \times 4 \frac{11}{16}$ [360 x 165 x 120] not supplied | supporting frame in galvanized steel with height adjustable stainless steel feet | technical compartment and open compartment in polished stainless steel



0°F



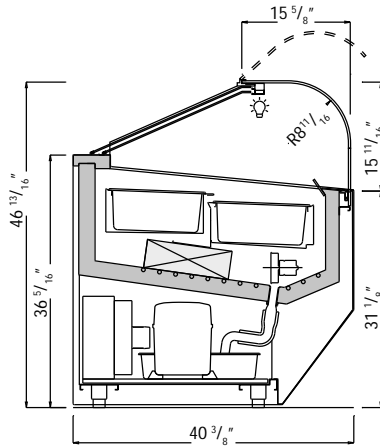

Technical



- Ventilated
- R452A
- Hermetic
- Led no-spot 3000°K
- Automatic / reverse cycle
- N. 4 / R.H. 55% max
- 220 V / 1 Ph / 60 Hz
- 0°F

Data Sheet

*Measurements are subject to revisions/updates, please refer to manufacturer's drawings at order confirmation

*Crate weight only

Model Code	Dimensions L x D x H inches	Weight Lbs	Max Pwr. Consumption W / A	Avg Operating Consumption KW/h	Cooling Power/Expansion BTU / °F	GAS Type
 CIAOVCGEL121 (+PANELS)	44 7/8 x 40 3/8 x 46 13/16	463	1400 / 7.0	0.9	2150 / -31	R452A
	51 1/2 x 47 3/8 x 58 1/8	265				
 CIAOVCGEL181 (+PANELS)	64 3/8 x 40 3/8 x 46 13/16	617	2200 / 11.0	1.2	2934 / -31	R452A
	71 x 47 3/8 x 58 1/8	364				
 CIAOVCGEL241 (+PANELS)	83 7/8 x 40 3/8 x 46 13/16	705	2700 / 14.0	1.8	3583 / -31	R452A
	90 1/2 x 47 3/8 x 58 1/8	463				
 CIAOVCGEL 12+121 (+PANELS)	83 7/8 x 40 3/8 x 46 13/16	728	3000 / 15.5	1.9	2150+2150 / -31	R452A
	90 1/2 x 47 3/8 x 58 1/8	463				

Optionals:

- CIV61
s/s pan mm.
360x165x120H
- CIV63
s/s pan mm.
360x250x80H
- CIVF95
s/s display tray
- GSG02
Perspex pan
- CIV56
s/s dipper well
- CIV18-20
Roller night blind
- PASPRA
switch from
-0.4°F to +39.2°F
- CIT44
easy clean filter
- CIM08
kit wheels

