



**Code**

**ACN511**

**Model**

**WINE 1500 BLACK 115/60**



**Intertek**  
5028503



**Intertek**  
5028503

**Conformity**


UL 60335-1  
 UL 60335-2-89  
 CAN/CSA-C22.2 No. 60335-1  
 CAN/CSA-C22.2 No. 60335-2-89  
 NSF/ANSI 7

**Building characteristics**

INSIDE covering	Mirror-polished S/S /
OUTSIDE covering	Black plastic-coated S/S /
Internal temp range	[ +35.6°F +68°F ]
Thickness of insulation: High density polyurethane foam (42 kg/m <sup>3</sup> ) without HCFC	in. 2.95
Voltage V-Ph-Hz	115/1N/60
Absorbed Power / Current	Kw .63 / Amps 7.3

Includes:	n° 8 INOX removable drawers (max 110.23 lbs per drawer) - n° 8 INOX slanted dividers	
Electronic controller	DIGITAL	
HACCP Loggin Function	✓	
WIFI Connection	Optional	
Key lock	✓	
Internal light	✓	
Water condensing unit	Optional	
Net Weight	lbs.	672
	Packed	727.5
Cooling Capacity	ASHRAE Watt	T. evap. +14°F / +131°F T.cond TN 670
Capillary / Termostatic Valve	Cap.	
Evaporator fan	Ø - Watt-Volt	1x9.84Ø-12W-115V
Defrosting/heating	Watt	275W
Net capacity	gal.	360,59
Compressor	EMBRACO NEK6210U	
Condenser fan	Ø - Watt-Volt	1x7.87Ø-12W-115V
Refrigerant	oz.	R290 GWP: 3 3.88
Noise	Db(A)	58.6

Code	ACN511
Model	WINE 1500 BLACK 115/60
External dimensions packed	60.63" x 34.65" x 87.99"

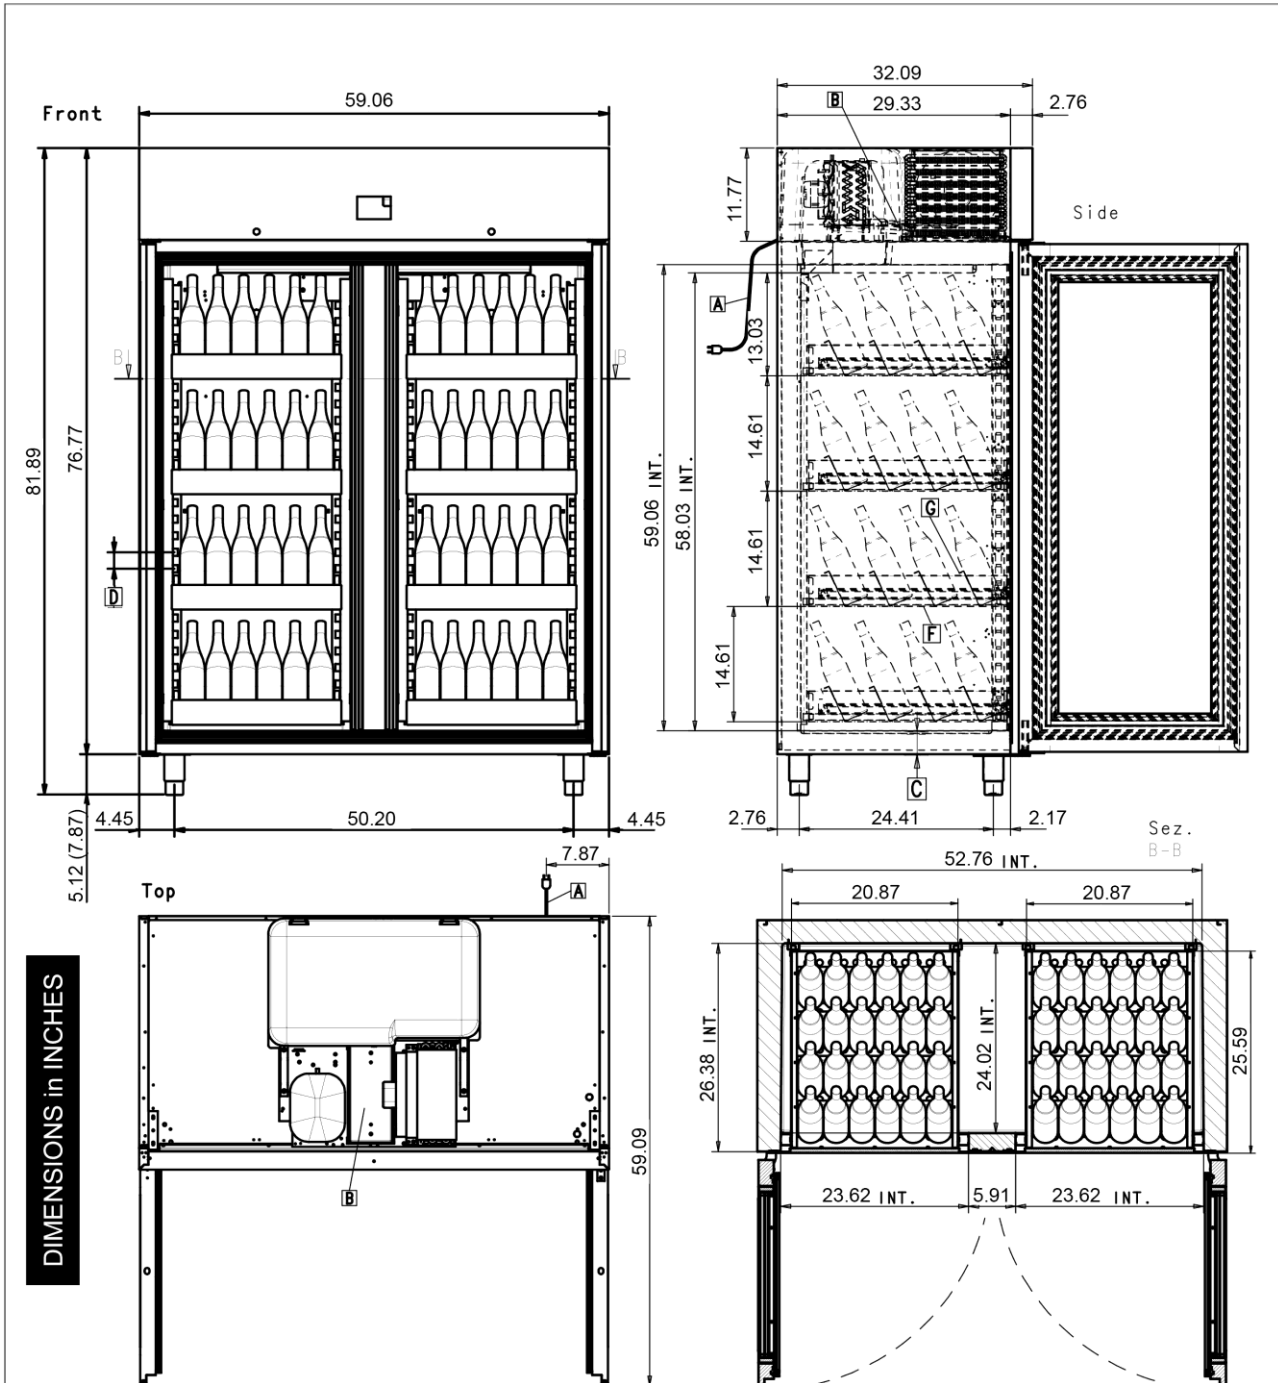

DIMENSIONS in INCHES

- A = Electrical connection L. 6.9 ft
- B = Condensate drain pan
- C = 1.97 inches thick insulation
- D = Rack pitch 2.09 inches
- F = Stainless steel drawers n°8 included (Max capacity 42 bottles each drawer)
- G = Bottle rack n°32 (4 for each drawer)

La ditta Everlasting s.r.l si riserva il diritto di apportare ai propri prodotti quelle modifiche tecniche e stilistiche che riterrà necessarie o utili senza pregiudicare le caratteristiche essenziali. Everlasting reserves the right to modify technical and stylistic features of its products without any prior notice, should such modifications be necessary or useful and not affecting any essential features of the product itself.