



IER ELECTRIC RANGES

Designed for performance and durability, this range features a stainless steel front, sides, back riser, and plate shelf, along with 6" adjustable legs for added stability. It comes equipped with four powerful 9" round heating plates, each delivering 2 kW of input for consistent, even cooking. A full-width, pull-out stainless steel crumb tray beneath the cooktop makes cleanup fast and easy. The standard oven delivers 5 kW of total power and includes a low-wattage broiler element—ideal for finishing dishes. Oven interior dimensions are 20"W x 22.4"D x 13.8"H on the 24" range, and 25.8"W x 22.4"D x 13.8"H on the 36" model, providing ample space for a variety of cooking tasks.

Features

- 24" and 36" width
- Stainless steel exterior
- Removable, 3-position rack guides with 1 oven rack
- Electromechanical heavy-duty oven thermostat (150°F/66°C - 550°F/288°C)
- Tubular heating elements, infinite switch controlled
- Cool touch oven door handle
- 10" (254 mm) high stainless steel backsplash
- 6" (152 mm) adjustable stainless steel legs

Specifications



IER-4-24



Intertek

Intertek

Model	Burners	Volts Phase	Total kw	Overall Dimensions	Weight	Shipping Dimensions	Shipping Weight
IER-4-24	4	208V / 240V	13	24" x 30.8" x 59" 61 x 78.2 x 150 cm	227 lbs 103 Kg	27.6" x 36.6" x 43.7" 70 x 93 x 111 cm	312 lbs. 142 Kg
IER-6-36	6	208V / 240V	17	36" x 30.8" x 59" 91.5 x 78.2 x 150 cm	319 lbs 145 Kg	39.4" x 36.6" x 43.7" 100 x 93 x 111 cm	434 lbs. 197 Kg



www.mvpgroupcorp.com




3560 NW 56th Street
Fort Lauderdale, FL 33309
Tel.: 786.600.4687 / Toll Free: 844.218.8477


sales@mvpgroupcorp.com




IER ELECTRIC RANGES

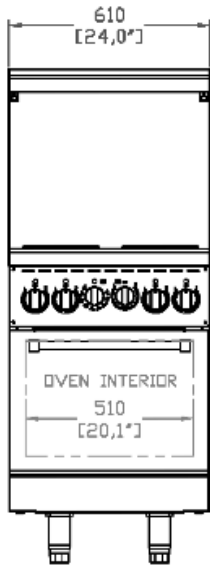

IER-4-24

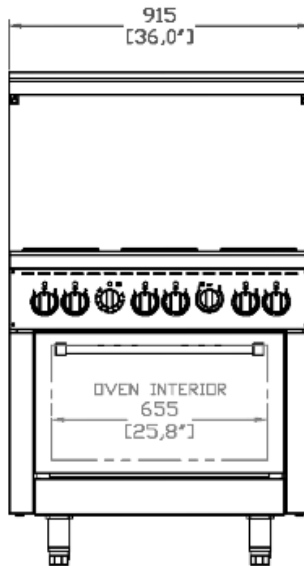

IER-6-36

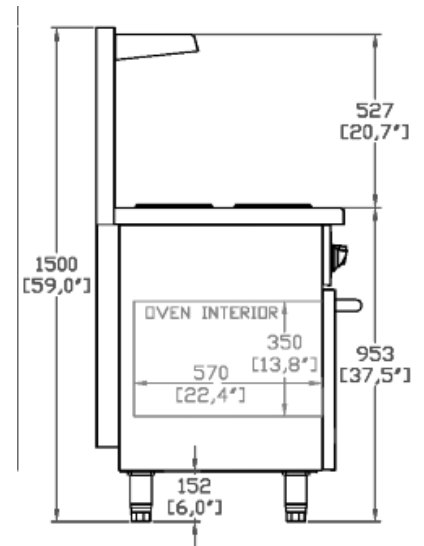

- **Ratings:**

Round sealed Elements: 9" (229mm), 2kW at 240V, Griddle (per 12"/305mm section): 4000 Watts;
Standard Oven: 5 kW, Top broiler (1.75kW) control by infinite switch, Bottom heat element (3.25kW) control by thermostat valve

- **Optional Features:**

☐ Extra oven rack ☐ Range mounted salamander broiler ☐ Set of four casters (two locking) ☐ Chrome griddle top

• **Clearance Requirements:** For use only on non-combustible floors. Legs or casters are required for non-combustible floors; 0" clearance from non-combustible surfaces and 6" (152 mm) from combustible surfaces.

• This appliance is manufactured for commercial installation only, not intended for home use.

• For supply connections use copper wire only, suitable for at least 90°C (194°F)

• An adequate ventilation system is required for Commercial Cooking Equipment.



Intertek

Intertek



www.mvpgroupcorp.com



3560 NW 56th Street
Fort Lauderdale, FL 33309
Tel.: 786.600.4687 / Toll Free: 844.218.8477

sales@mvpgroupcorp.com