

ITALIA 2-3 SELF SERVE REAR LOADING SHOWCASE

STANDARD FEATURES

- Available in 2 heights: 47"H and 53"H
- Diffused LED lighting 3000°K
- Glass frame gray
- Polished stainless steel display area
- Rear loading with two double pane leaf doors
- Glass shelf/shelves
- Ventilated refrigeration system on all shelf/shelves
- Automatic defrost
- Dixell digital control
- Tubular structure painted stainless steel
- Cases ship standard unfinished front and stainless steel skin sides

OPTIONS

- Glass frame colors: black, white, and gold
- Remote condensing unit
- Matches with Muro H11
- Cold storage
- RAL color finish/wood laminate front and side panels
- Heated pan for evaporator
- Casters

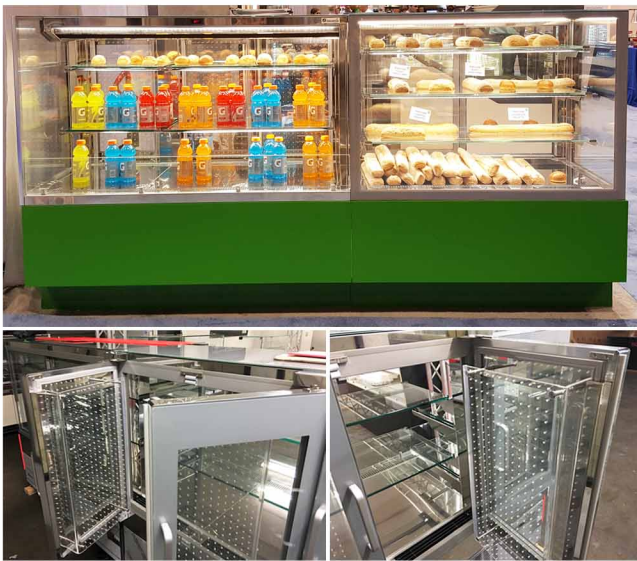


Photo shown with optional RAL color finish. Standard cases are unfinished front with stainless steel skin sides.



Visit our website for more finishing options and RAL colors
www.oscartek.com

ITALIA 2 SELF SERVE REAR LOADING				
TECHNICAL FEATURES		MODELS		
		ITALIA 2 SSRL1000 (ITL2SELF39)	ITALIA 2 SSRL1500 (ITL2SELF59)	ITALIA 2 SSRL2000 (ITL2SELF78)
External Dimensions (L-D-H)	Inches	*39 3/8" - 31 11/16" - 47 1/4"	*59 1/16" - 31 11/16" - 47 1/4"	*78 3/4" - 31 11/16" - 47 1/4"
Inches-MM	MM	*1000 - 804 - 1200	*1500 - 804 - 1200	*2000 - 804 - 1200
Crated Dimensions (L-D-H)	Inches	44" - 38" - 54"	64" - 38" - 54"	83" - 38" - 54"
Inches-MM	MM	1117 - 965 - 1371	1625 - 965 - 1371	2108 - 965 - 1371
Refrigeration	Type	Ventilated	Ventilated	Ventilated
Refrigeration Display Area	Type	Deck + Shelf	Deck + Shelf	Deck + Shelf
Operating Temperature	°F	+41°F	+41°F	+41°F
BTU'S @ +14°F Expansion Temperature	BTU's	6000	7500	8500
Electric Supply	V/Ph/Hz	208-220/1/60	208-220/1/60	208-220/1/60
Power Consumption	W/A	1400/7	1500/8	1800/9
Climatic Class	°F/H.R.	75°F-55%RH	75°F-55%RH	75°F-55%RH
Refrigerant Gas	Type	R404A / R452A	R404A / R452A	R404A / R452A
Pipe Size (Inches)	Suction, Liquid	5/8" Suction, 5/16" Liquid	5/8" Suction, 5/16" Liquid	5/8" Suction, 5/16" Liquid
Net Weights	Lb	450	685	990
Crated Weights	Lb	500	760	1065

* DIMENSIONS ARE WITHOUT SIDE PANELS


*Factory in its effort to upgrade and improve our products, has the right to change, modify, discontinue or change any feature, size or capacity on any model without prior notice.

ITALIA 2-3 SELF SERVE REAR LOADING SHOWCASE

ITALIA 3 SELF SERVE REAR LOADING				
TECHNICAL FEATURES		MODELS		
		ITALIA 3 SSRL1000 (ITL3SELF39)	ITALIA 3 SSRL1500 (ITL3SELF59)	ITALIA 3 SSRL2000 (ITL3SELF78)
External Dimensions (L-D-H)	Inches	*39 3/8" - 31 11/16" - 53 1/8"	*59 1/16" - 31 11/16" - 53 1/8"	*78 3/4" - 31 11/16" - 53 1/8"
Inches-MM	MM	*1000 - 804 - 1350	*1500 - 804 - 1350	*2000 - 804 - 1350
Crated Dimensions (L-D-H)	Inches	44" - 38" - 60"	64" - 38" - 60"	83" - 38" - 60"
Inches-MM	MM	1117 - 965 - 1524	1625 - 965 - 1524	2108 - 965 - 1524
Refrigeration	Type	Ventilated	Ventilated	Ventilated
Refrigeration Display Area	Type	Deck + Shelves	Deck + Shelves	Deck + Shelves
Operating Temperature	°F	+41°F	+41°F	+41°F
BTU'S @ +14°F Expansion Temperature	BTU's	6500	8200	9600
Electric Supply	V/Ph/Hz	208-220/1/60	208-220/1/60	208-220/1/60
Power Consumption	W/A	1650/7.5	1850/8.9	1950/9.1
Climatic Class	°F/H.R.	75°F-55%RH	75°F-55%RH	75°F-55%RH
Refrigerant Gas	Type	R404A / R452A	R404A / R452A	R404A / R452A
Pipe Size (Inches)	Suction, Liquid	5/8" Suction, 5/16" Liquid	5/8" Suction, 5/16" Liquid	3/4" Suction, 3/8" Liquid
Net Weights	Lb	485	750	990
Crated Weights	Lb	535	825	1065

* DIMENSIONS ARE WITHOUT SIDE PANELS


SECTION VIEWS: ITALIA 2-3 SSRL1000, SSRL1500, SSRL2000

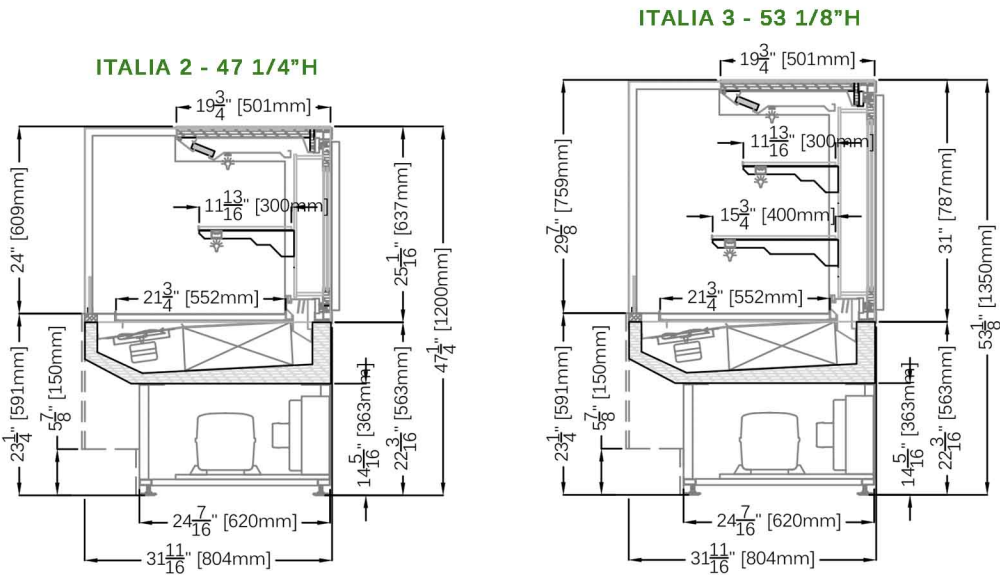

*Factory in its effort to upgrade and improve our products, has the right to change, modify, discontinue or change any feature, size or capacity on any model without prior notice.


ITALIA 2-3 SELF SERVE REAR LOADING SHOWCASE

ITALIA 2-3 PLAN VIEWS: ITALIA 2-3 SSRL1000, SSRL1500, SSRL2000

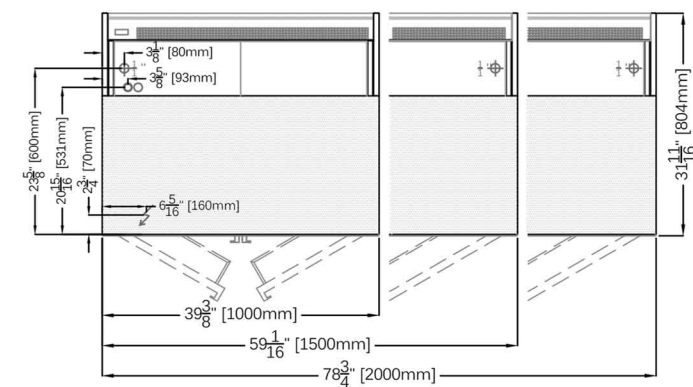

ELECTRICAL LEGEND	
	REFRIGERATED LINES
	DRAIN
	POWER

ITALIA 2-3 REAR ELEVATIONS (OPERATOR SIDE): ITALIA 2-3 SSRL1000, SSRL1500, SSRL2000

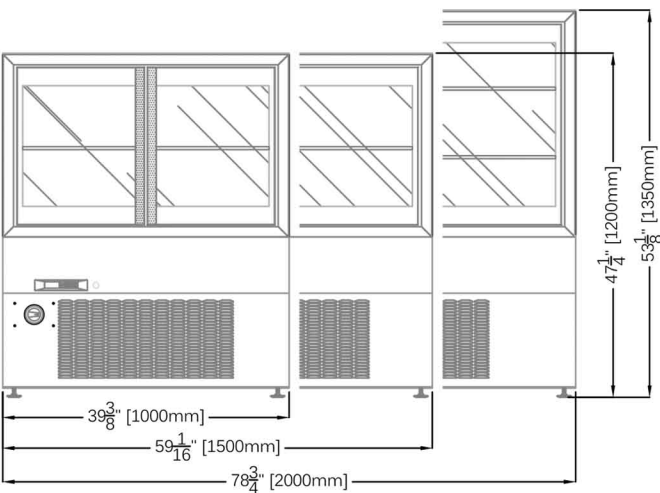

*Factory in its effort to upgrade and improve our products, has the right to change, modify, discontinue or change any feature, size or capacity on any model without prior notice.



512 South Airport Blvd., South San Francisco, CA 94080
Tel: 855.885.2400 | 650.342.2400 | Fax: 650.342.7400
sales@oscartek.com | www.oscartek.com

