# SANDWICH UNIT REFRIGERATOR

# Model: SW48N18M-HGL-FB

Natural Refrigerant R-290 Model

48" Mighty Top Sandwich Unit Refrigerator with Solid Doors and Hinged Glass Lid - 18 Pans - Front Breathing

Stainless steel front, top and end panels, aluminum back and interior.



### **Options and Accessories**

| (upcharge and lead times may apply)          |                            |
|--|----------------------------|
| Stainless steel back                         | Stainless steel interior   |
| Additional epoxy coated steel shelves        | Rear mounted cutting board |
| Stainless steel shelves                      | Composite cutting board    |
| Door locks                                   | Crumb catcher              |
| Drawers in lieu of doors (consult factory)** |                            |

Drawers in lieu of doors (consult factory)\*\*

Consult factory for other model configurations, options and accessories. \*\*Two tier: (1) 1/2 size x 6 & (1) 1/3 x 6 pans per drawer



**Toll-Free: 800-523-7138** Phone: 215-244-1400 Fax: 215-244-9579

539 Dunksferry Road Bensalem, PA 19020 www.continentalrefrigerator.com

| Project Name:    |           |
|------------------|-----------|
|                  |           |
| Model Specified: |           |
|                  |           |
| Location:        |           |
|                  |           |
| Item No:         | Quantity: |
|                  |           |
| AIA #:           | SIS #:    |

## **Standard Model Features**

#### **REFRIGERATION SYSTEM**

| Performance rated refrigeration system   |
|--|
| Natural, environmentally safe,<br>high efficiency R-290 refrigerant <sup>1</sup> |
| Unique air flow distribution allows<br>pan product to maintain 33° - 41°F        |
| Automatic, hot gas condensate evaporator   |
| Non-corrosive, plasticized fin evaporator coil                                   |
| Expansion valve system   |
| Easily serviceable, back mounted compressor                                      |
| CABINET ARCHITECTURE   |
| 2" non-CFC polyurethane foam insulation  |
| Smooth, polished chrome door handles   |
| Spring loaded, self closing doors  |
| Magnetic snap in Santoprene™ door gaskets  |
| Heavy duty, epoxy coated steel shelves   |
| 8" deep, full length nylon cutting board   |
| Energy efficient, 2 pane, low emissivity glass lid                               |
| Aluminum glass frame with satin finish   |
| Concealed lid hinges   |
| Integral stainless steel gas spring lid supports                                 |
| Completely enclosed, vented and removable case back                              |
| 3 <sup>3</sup> / <sub>4</sub> " casters  |
| MODEL FEATURES   |

APPROVAL:

### **Model Specifications**

### **Model Plan Views**

| Net Capacity (cubic feet)13.4 (379 cu l)½ Size Pans (4" deep)18Width, Overall (inches)48 (1219 mm)Depth, Overall (inches)35 (889 mm)(including top, cutting board & bumpers)8 (203 mm)Depth, Cutting Board (inches)8 (203 mm)Height, Overall (inches)35 %16 (935 mm)Shelf Area (square feet)6.8 (0.6 sq m)Number of Shelves2Number of Doors2Interior Depth (inches)See DrawingInterior Height (inches)26 ¼ (667 mm)Interior Width (inches)44 (1118 mm) | DIMENSIONAL DATA                                |                 |
|--|---|-----------------|
| Width, Overall (inches)48 (1219 mm)Depth, Overall (inches)<br>(including top, cutting board & bumpers)35 (889 mm)Depth, Cutting Board (inches)8 (203 mm)Height, Overall (inches)<br>(including 5" casters)35 %16 (935 mm)Shelf Area (square feet)6.8 (0.6 sq m)Number of Shelves2Number of Doors2Interior Depth (inches)See DrawingInterior Height (inches)26 1/4 (667 mm)   | Net Capacity (cubic feet)                       | 13.4 (379 cu l) |
| Depth, Overall (inches)<br>(including top, cutting board & bumpers)35 (889 mm)Depth, Cutting Board (inches)8 (203 mm)Height, Overall (inches)<br>(including 5" casters)35 %16 (935 mm)Shelf Area (square feet)6.8 (0.6 sq m)Number of Shelves2Number of Doors2Interior Depth (inches)See DrawingInterior Height (inches)26 1/4 (667 mm)  | <sup>1</sup> / <sub>6</sub> Size Pans (4" deep) | 18              |
| (including top, cutting board & bumpers)35 (889 mm)Depth, Cutting Board (inches)8 (203 mm)Height, Overall (inches)<br>(including 5" casters)35 %16 (935 mm)Shelf Area (square feet)6.8 (0.6 sq m)Number of Shelves2Number of Doors2Interior Depth (inches)See DrawingInterior Height (inches)26 1/4 (667 mm)   | Width, Overall (inches)                         | 48 (1219 mm)    |
| Height, Overall (inches)<br>(including 5" casters)35 %16 (935 mm)Shelf Area (square feet)6.8 (0.6 sq m)Number of Shelves2Number of Doors2Interior Depth (inches)See DrawingInterior Height (inches)26 1/4 (667 mm)   |   | 35 (889 mm)     |
| (including 5" casters)35 %16 (935 mm)Shelf Area (square feet)6.8 (0.6 sq m)Number of Shelves2Number of Doors2Interior Depth (inches)See DrawingInterior Height (inches)26 1/4 (667 mm)   | Depth, Cutting Board (inches)                   | 8 (203 mm)      |
| Number of Shelves2Number of Doors2Interior Depth (inches)See DrawingInterior Height (inches)26 1/4 (667 mm)  |   | 35 ¾16 (935 mm) |
| Number of Doors2Interior Depth (inches)See DrawingInterior Height (inches)26 1/4 (667 mm)  | Shelf Area (square feet)                        | 6.8 (0.6 sq m)  |
| Interior Depth (inches)See DrawingInterior Height (inches)26 1/4 (667 mm)  | Number of Shelves                               | 2               |
| Interior Height (inches) 26 ¼ (667 mm)   | Number of Doors                                 | 2               |
|  | Interior Depth (inches)                         | See Drawing     |
| Interior Width (inches) 44 (1118 mm)   | Interior Height (inches)                        | 26 ¼ (667 mm)   |
|  | Interior Width (inches)                         | 44 (1118 mm)    |

### **REFRIGERANT DATA**

| Condensing Unit Size (H.P.) | 1⁄4  |
|-----------------------------|------|
| Capacity (BTU per hour)*    | 1940 |

### **ELECTRICAL DATA**

| Voltage (International)                        | 115/60/1 (220/50/1) |
|--|---------------------|
| Total Amps (International)                     | 4.8 (2.7)           |
| 10 ft. Cord/Plug [attached]<br>(International) | Yes<br>(No)         |


#### **SHIPPING DATA**


| Weight (pounds)          | 313 (142 kg)   |
|--------------------------|----------------|
| Height - Crated (inches) | 43 ¼ (1099 mm) |
| Width - Crated (inches)  | 56 (1422 mm)   |
| Depth - Crated (inches)  | 37 ¼ (946 mm)  |


\* Rating @ +25°F evaporator, 90°F ambient

Figures in parentheses reflect metric equivalents rounded to the nearest whole unit.



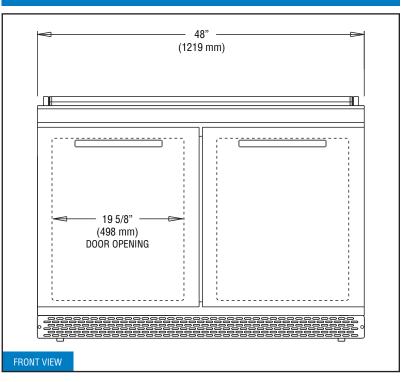

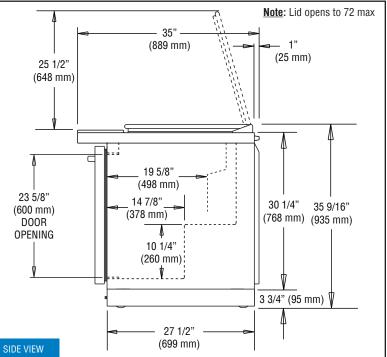

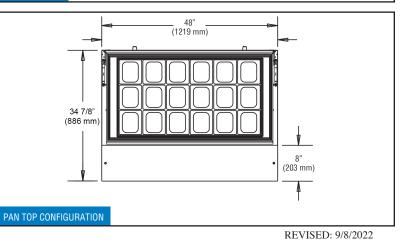

A Division of National Refrigeration & Air Conditioning Products, Inc.