



Item: \_\_\_\_\_

Quantity: \_\_\_\_\_

Project: \_\_\_\_\_

**50 lb. Fryer with Built-in Filter**

## **Delux Series**

Models:  RFT-50-2-XX    RFT-50-3-XX    RFT-50-4-XX    RFT-50-5-XX



RFT-50-2-EM with optional caster

Gas Type:    Natural    LP

Elevation (if above 2000 ft.): \_\_\_\_\_

- EM - Electro mechanical thermostat (200°-400° F)
- DM2 - Two channel solid state digital control with melt cycle
- CM - 8 product computer control with individual programming capabilities for temperature and

### Standard Features

- Fully welded frame with lifetime warranty
- 50 lb capacity each per stainless steel tank
- Frying area each tank: 14" x 14"
- 8 gpm filter pump with 6' power cord
- Shortening returns through wash hose
- All welded stainless steel cabinet
- Cast iron burners rated at 38,000 BTU/hr each
- Millivolt control system with 100% safety shut off
- Thermostatic control with 200°-400° F range
- Twin fry baskets each tank with plastic coated handles for ease of handling
- 1¼" full port drain valve each tank
- 6" high adjustable heavy duty legs
- 25 sheets of filter paper
- Five year limited (prorated) warranty on S/S tank


### Options and Accessories

- Royal Plus Filtration- Shortening returns thru the bottom of tank
- Royal Ultra-Plus Filtration- Shortening returns thru the bottom of tank and thru the wash hose
- Fine mesh screen with handles
- Triple filtration for heavy breadng products
- Permafil filter screen in lieu of paper
- Heat tape for solid shortening
- Stainless-steel tank cover
- Stainless-steel side splash guard
- Filter tub cover
- Dump station with heat lamp
- 100 pack of filter paper
- Fitting for oil disposal
- 5" swivel casters
- 48" quick disconnect and restraining cable



**2 YEAR LIMITED, PARTS AND LABOR WARRANTY**

# 50 lb. Fryer with Built-in Filter

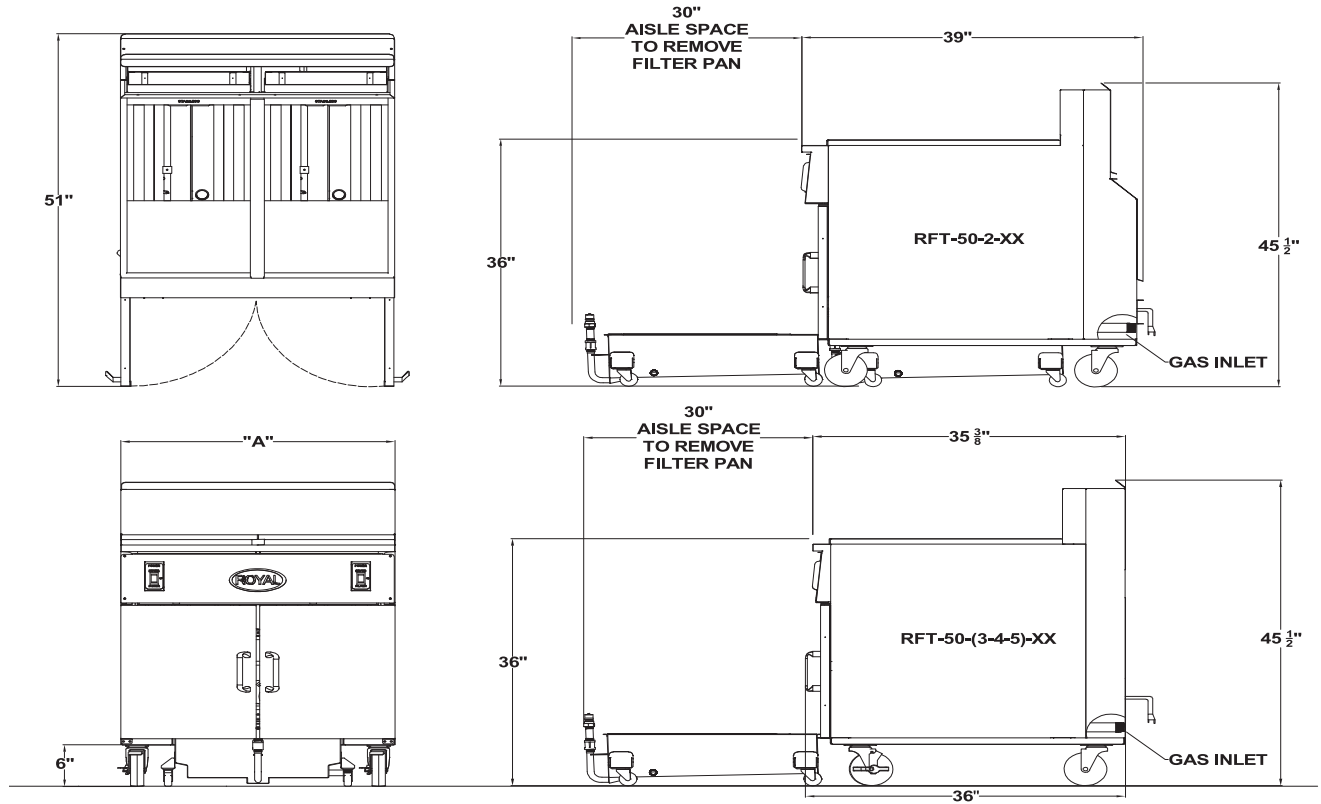

Model Number	Width "A"	Cooking Area Each Tank	Number of Burners/Tank	Total BTU Each Tank	Ship Weight
RFT-50-2-XX	31"	14" x 14"	3	114,000	490 lbs.
RFT-50-3-XX	46.5"	14" x 14"	3	114,000	650 lbs.
RFT-50-4-XX	62"	14" x 14"	3	114,000	830 lbs.
RFT-50-5-XX	77.5"	14" x 14"	3	114,000	1,010 lbs.

For dump station add 15 1/2" to width

### Filter Electrical Requirements, 50/60

Volt / Phase	Amps
115V, 1PH	7 + .5 per tank

### Gas Pressure:

4" W.C.	Natural Gas
11" W.C.	Propane

### Gas Connection:

3/4" 1-2 tanks, 1 1/4" 3+ tanks NPT on the rear of fryer.

No external pressure regulator required.

Specify type of gas and altitude, if over 2,000 feet, when ordering

### Clearances:

	Combustible	Non-Combustible
Rear	6"	0"
Sides	6"	0"

Due to continuing product development to ensure best possible performance, these specifications are subject to change without prior notification.

**Royal Range of California, Inc.**  
 3245 Corridor Dr. • Eastvale, CA 91752 • (800) 769-2414 • (951) 360-1600  
 Fax: (951) 360-7500 • www.royalranges.com • sales@royalranges.com